


PRESSURE INDICATING SENSOR FILMS

Encasement Service

TWO EXAMPLES OF OUR ENCASEMENT SERVICE



Encased Pressure^x[®] film positioned under a wafer polishing head

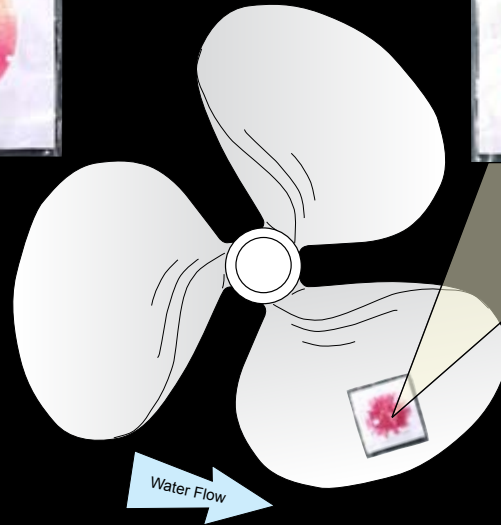

Encased Pressure^x[®] film used in a propellor test

Once our tactile pressure indicating film has been encased it can be used in environments where high moisture content, oil, solvents and other contaminants previously posed a particular problem to its use. Pressure^x[®] is a unique tactile pressure indicating film which enables the accurate, efficient, and cost effective measurement of contact pressure, beginning at 28 PSI to 43,200 PSI (2 kg/cm² up to 1,300 kg/cm²).

• *Sensor Products Inc. is now able to provide fully customized shapes and sizes of Pressure^x[®] film pre-packaged and encased, thereby saving considerable time for our customers.*

• *Sensor Products Inc. also has the ability to custom encase long strips of Pressure^x[®] film for use in nip roller contact tests in large flexo, converting or packaging applications.*