


Thermal Protection Barrier Film

TemprX[®] film shields Pressurex[®] film from damaging temperatures

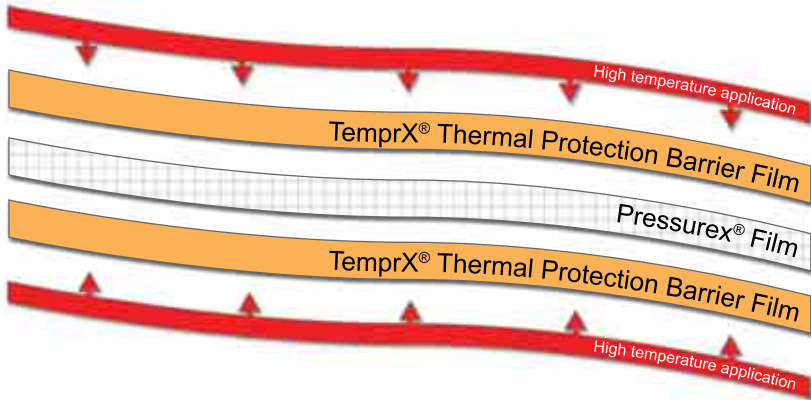

TemprX[®] film comes on a roll or by the sheet

TemprX[®] is a thermal protection polyimide film for use with our Pressurex[®] film in applications that reach high temperatures. Pressurex[®] is a thin, flexible pressure indicating film that instantly captures and records pressure distribution and magnitude between any two contacting, mating or impacting surfaces. It is simple to use, effective and inexpensive.

COMMON APPLICATIONS



Aerospace: composite bonding, nip pressures



Electronics: heat sink analysis, nip pressures, laminations, LCD bonding



Factory: lamination, clamping, heat sealing, nip pressures

PHYSICAL SPECIFICATIONS

Temperature Range: Up to 752° F (400° C°)

Gauge: From 2 to 5 mils

Dimensions: In rolls up to 2 ft x 100 ft (0.6 m x 30 m)

MSDS available upon request.