


Thermal Protection Barrier Film

TemprX[®] film shields Fuji Prescale[®] film from damaging temperatures



TemprX[®] is a thermal protection polyimide film for use with Fujifilm Prescale[®] in applications that reach high temperatures. Fujifilm Prescale[®] is a thin, flexible pressure indicating film that instantly captures and records pressure distribution and magnitude between any two contacting, mating or impacting surfaces. It is simple to use, effective and inexpensive.

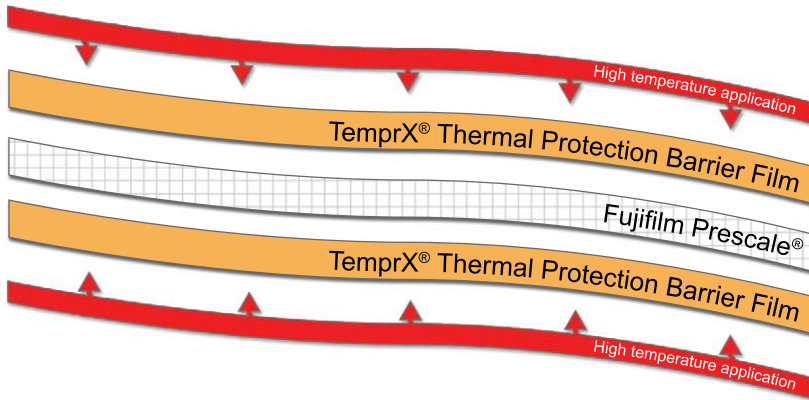

TemprX[®] film comes on a roll or by the sheet

COMMON APPLICATIONS



Aerospace: composite bonding, nip pressures



Electronics: heat sink analysis, nip pressures, laminations, LCD bonding



Factory: lamination, clamping, heat sealing, nip pressures

PHYSICAL SPECIFICATIONS

Temperature Range: Up to 752° F (400° C°)

Gauge: From 2 to 5 mils

Dimensions: In rolls up to 2 ft x 100 ft (0.6 m x 30 m)

MSDS available upon request.