

**THE EFFECT OF A REVERSE SHOE AND POLYSTYRENE PADDING ON THE
BIOMECHANICS OF THE FRONT HOOF OF THE HORSE**

A DISSERTATION

SUBMITTED TO THE

FACULTY OF VETERINARY SCIENCE

OF THE

UNIVERSITY OF PRETORIA

IN FULFILMENT OF THE REQUIREMENTS

FOR THE DEGREE OF

MASTERS

IN

COMPANION ANIMAL CLINICAL STUDIES

BY

HENNING JONATHAN MOSTERT

BACHELOR OF ENGINEERING, PU FOR CHE, 1993

MASTER OF ENGINEERING (Bio-engineering), UNIVERSITY OF PRETORIA, 1995

BA THEOLOGY, UNIVERSITY OF PRETORIA, 1999

B DIV, UNIVERSITY OF PRETORIA, 2001

Promotor: Prof AJ Guthrie

Co-Promoters: Prof SS van den Berg

Dr J Wannenburg

February 2009



UNIVERSITEIT VAN PRETORIA
UNIVERSITY OF PRETORIA
YUNIBESITHI YA PRETORIA

Soli Deo Gloria

(To God Alone be the Glory)

ACKNOWLEDGEMENTS

Without the help, support and co-operation of a great number of people, this research would not have been possible. I would like to express my sincere gratitude to the following people:

Prof. Alan Guthrie, my promotor and director of the Equine Research Centre, for his friendly guidance, patience and for the encouragement and support he has given me throughout my studies. Thank you for letting me discover myself as well as my physical and mental abilities.

Prof. Sybrand van den Berg, my co-promotor for his interest and encouragement in the daily progress of my studies. Thank you for introducing me into a whole new world of Equine Biomechanics and also for being available when I encountered a *cul de sac*.

The staff at the Equine Research Centre, **Julia Buss, Jane Nurton, Kim Stevens, Fiona Holman, Eileen Hussey, Cornè Williams and Elmarie Mostert** for their cheerful and invaluable assistance throughout this research.

Mr. Clifford Matjiane for helping me with handling and taking care of the horses.

The staff at the **Equine Clinic** of the Academic Veterinary Hospital.

Prof. Koos van den Berg who had the unpleasant task of euthanasing the horses.

Dr. Ann Olivier for her advice and interest in my studies.

Sr Cruywagen and her assistants at the Radiology Section of the Academic Veterinary Hospital for taking the radiographs.

The staff of the **Department of Pathology** for the amputation of the limbs.

The staff at the Laboratory of Advanced Engineering (LAE): **Johan Wannenburg, Herman Booysen and Danie Gouws** for their support with the technical aspects of the research.

Mr. Richard Meaker and his assistants for collecting the horses in Potchefstroom and shoeing them all for the research.

All my **family members**, especially my parents, for their love, interest and support during this research.

Pine and Jeanetta for their love, moral support and encouragement.

Dr Johan and Riana Marais for their friendship, support and encouragement.

Jan and Anne-Marie Scheepers for assisting me through difficult times.

I am grateful to the following organisations whose generous financial assistance enabled the experimental work described in this dissertation to be undertaken: The **TRANSVAAL/ GAUTENG PROVINCIAL ADMINISTRATION, HIGHVELD RACING AUTHORITY, PHUMELELA GAMING AND LEISURE (LTD), EQUINE RESEARCH CENTRE** and the

UNIVERSITY OF PRETORIA.

Thank you **Mustang** for donating the shoes used for this study.

The experiments described in this dissertation would not have been possible without the excellent co-operation and patience of the subjects, **the horses**, who participated in the experiments.

DECLARATION

I, Henning Jonathan Mostert, do hereby declare that the experiments presented in this dissertation were conceived and executed by myself and, apart from the normal guidance from my supervisors, I have received no assistance.

Neither the substance nor any part of this dissertation has been submitted in the past, or is being, or is to be submitted for a degree at this University or any other university.

This dissertation is presented in fulfilment of the requirements for the degree of Masters.

Signed:

Date:

TABLE OF CONTENTS

ACKNOWLEDGEMENTS	ii
DECLARATION	vi
Dissertation Summary	xii
Tesis Samevatting	xvi
LIST OF FIGURES	xx
LIST OF TABLES	xxiii
CHAPTER 1	1
GENERAL INTRODUCTION	1
CHAPTER 2 LITERATURE REVIEW	3
2.1 ANATOMY OF THE NORMAL HOOF OF A HORSE	3
2.2 FORCES OPERATING ON THE NORMAL HOOF	4
2.3 AETIOLOGY OF LAMINITIS	6
2.4 PATHOGENESIS OF LAMINITIS	6
2.4.1 The Developmental Phase	6
2.4.2 The Acute Phase	7
2.4.3 The Chronic Phase	7
2.5 SYMPTOMS OF HORSES SUFFERING FROM LAMINITIS	8
2.5.1 Clinical signs of laminitic cases	8
2.6 DIAGNOSIS OF LAMINITIS	9
2.6.1 Radiography and radiology of the hoof of a horse with laminitis	9

2.7 TREATMENT OF LAMINITIC CASES.....	12
<i>2.7.1 Treatment of the Developmental Phase of Laminitis</i>	<i>13</i>
<i>2.7.2 Treatment of Acute Laminitis</i>	<i>13</i>
<i>2.7.3 Treatment of Chronic Laminitis</i>	<i>14</i>
<i>2.7.4 Trimming techniques for Laminitis</i>	<i>14</i>
<i>2.7.5 Hoof wall removal.....</i>	<i>17</i>
<i>2.7.5.1 Methods of hoof wall removal</i>	<i>18</i>
2.7.5.1.1 Dorsal hoof wall removal.....	18
2.7.5.1.2 Hoof wall stripping	20
<i>2.7.6 Therapeutic shoeing of laminitic horses</i>	<i>20</i>
2.7.6.1 Heart-bar shoe.....	21
2.7.6.2 Reverse shoe.....	23
2.7.6.3 Solar support.....	24
2.7.6.4 Reverse shoe, partial dorsal hoof wall removal and polystyrene solar support (RDPS).....	26
2.8 EXPERIMENTAL BIO-MECHANICAL MODELS OF THE DISTAL DIGIT	26
<i>2.8.1 Hoof wall biomechanics</i>	<i>26</i>
<i>2.8.2 Biokinetic studies of the digit</i>	<i>27</i>
<i>2.8.3 Solar surface measurements.....</i>	<i>288</i>
CHAPTER 3 MATERIALS AND METHODS.....	29
3.1 HOOF PREPARATION	29
3.2 RADIOGRAPHY	29
3.3 PARTIAL HOOF WALL REMOVAL.....	30

3.4 SHOETING THE PREPARED HOOF WITH A REVERSE SHOE.....	30
3.5 CALIBRATION OF THE LOAD CELLS FOR USE IN THE EXPERIMENTAL PROCEDURES	31
3.6 APPLICATION OF THE POLYSTYRENE PAD TO THE PREPARED HOOF	322
3.7 PURPOSE-MADE EQUIPMENT FOR THIS STUDY	33
3.7.1 Solar plate.....	33
3.7.2 Modified shoe	33
CHAPTER 4 INVESTIGATION INTO THE <i>IN VITRO</i> EFFECT OF A REVERSE SHOE AND POLYSTYRENE PADDING ON THE BIOMECHANICS OF THE FRONT HOOF OF THE HORSE.....	35
4.1 INTRODUCTION.....	35
4.2 MATERIALS AND METHODS	36
4.2.2 Experimental Design.....	37
<i>Hardware</i>	<i>37</i>
<i>Reverse shoe.....</i>	<i>37</i>
<i>Polystyrene.....</i>	<i>37</i>
<i>Pressure Film.....</i>	<i>39</i>
<i>Tensile Testing Machine</i>	<i>40</i>
<i>Experimental Layout</i>	<i>41</i>
<i>Data Acquisition.....</i>	<i>45</i>
<i>Treatments applied to each limb.....</i>	<i>45</i>
4.2.3 Data Analysis.....	47
4.3 RESULTS	48

4.4 DISCUSSION	55
4.5 CONCLUSION	59
CHAPTER 5 INVESTIGATION INTO THE <i>IN VIVO</i> EFFECT OF A REVERSE SHOE AND POLYSTYRENE PADDING ON THE BIOMECHANICS OF THE FRONT HOOF OF THE HORSE.....	61
5.1 INTRODUCTION.....	61
5.2 MATERIALS AND METHODS	62
5.2.1 <i>Experimental Design</i>	62
5.2.2 <i>Data Analysis</i>	65
5.3 RESULTS	66
5.4 DISCUSSION	69
5.5 CONCLUSION	71
CHAPTER 6 GENERAL CONCLUSIONS AND RECOMMENDATIONS	72
CHAPTER 7 FURTHER RECOMMENDATIONS.....	75
BIBLIOGRAPHY	77
APPENDIX A : FIGURES ILLUSTRATING THE COMPRESSIVE STRENGTH OF POLYSTYRENE SUPPLIED BY THE MANUFACTURER	84
APPENDIX B : STANDARD CONTINUOUS PRESSURE CHART AND GRAPH OF TEMPERATURE AND HUMIDITY CONDITIONS USED FOR THE ANALYSIS OF THE DATA OF THE PRESSURE FILMS	85

APPENDIX C : OUTLINE OF COMPUTER PROGRAMME.....87

APPENDIX D : STATISTICAL RESULTS OF THE *IN VITRO* STUDY .93

APPENDIX E : STATISTICAL RESULTS OF THE *IN VIVO* STUDY....97

APPENDIX F : SAMPLES OF DATA MEASURED IN THIS STUDY...103

Dissertation Summary

THE EFFECT OF A REVERSE SHOE AND POLYSTYRENE PADDING ON THE BIOMECHANICS OF THE FRONT HOOF OF THE HORSE

HENNING JONATHAN MOSTERT

Promotor: Prof AJ Guthrie

Co-Promotors: Prof SS van den Berg, Mr J Wannenburg

Department: Department of Surgery
Faculty of Veterinary Science
University of Pretoria
Onderstepoort

Degree: MSc

The aim of this study was to investigate the effect of reverse shoes, partial dorsal hoof wall removal and polystyrene solar support on the biomechanics of the front hoof of the horse. Laminitis is a systemic syndrome that ultimately affects the sensitive lamellae and papilla of the hoof, causing severe pain, and often leading to disruption of the lamellae-hoof wall interface. Degeneration of the lamellar interdigitation occurs and the distal phalanx (P3) separates from the hoof wall. This can cause P3 to rotate towards the sole and, in more severe cases, P3 separates totally from the hoof wall and sinks downwards. Chronic laminitis usually results in the end of the animal's athletic career and may lead to humane destruction

During an *in vitro* study, three clinically healthy horses were euthanased and their dismembered forelimbs were used. A reverse shoe was applied and three polystyrene pads with a density of 32 kg/m^3 , thickness of 60mm and wedges of 66%, 50% and no wedging, respectively, were used in this study. Fuji Prescale Super and Ultra Super Low-Pressure film was used to indicate the pressure distribution of the polystyrene on the solar surface of the hoof. Two load cells were used to measure the load borne by the hoof wall and the solar area, respectively. A constantly increasing force with a maximum of 66% of the bodyweight of the horse was applied to the amputated limb by means of a tensile testing machine. A total of four experiments were done on each limb.

The results of this investigation showed that for all three of the polystyrene paddings, approximately 75 - 80% of the total load applied was borne by the solar area. The colour changes on the pressure film showed that most of the load of the 50% and 66% wedged polystyrene was borne by the palmar half of the solar surface, and less pressure by the dorsal half. For no wedging, the pressure distribution over the solar surface was even. The reverse shoe with the 66% and the 50% wedged polystyrene pads was shown to be useful in distributing the pressure to the palmar area of the sole.

During an *in vivo* study, the effect of different densities (32 kg/m^3 , 24 kg/m^3 and 16 kg/m^3) and different thicknesses (100mm and 60mm) of polystyrene padding, with a wedge of 50%, on the load distribution of the solar surface and the hoof wall was investigated. Compression of polystyrene over time and the effect thereof on the load distribution was determined.

The front hooves of three clinically healthy horses with a mean bodyweight of 551 kg, were trimmed and shod with reverse shoes. Reference data was recorded with only the reverse shoes on the hooves. Further data recording was done for the different polystyrene pads. Data was recorded for 4 seconds with a frequency of 50Hz. Between the treatments, the horses walked for 5 minutes on a concrete surface. This procedure was repeated 5, 10 and 15 minutes after application of the pads.

All the results of the solar pads used in the *in vivo* study showed a hyperbolic tendency in which the initial load was high and then diminished with time. Initially, treatments 5 ($32 \text{ kg/m}^3 \times 60 \text{ mm}$) and 3 ($16 \text{ kg/m}^3 \times 60 \text{ mm}$) proved to be the better treatments, but after 15 minutes no significant difference was found between the treatments. From the observations made during the experimental procedure, the $32 \text{ kg/m}^3 \times 60 \text{ mm}$ (treatment 5) compressed to a more dense and rigid end-product than the $16 \text{ kg/m}^3 \times 60 \text{ mm}$ (treatment 3). The compressed pad of treatment 3 was more elastic and may have contributed positively to reducing the compression of the pads on the blood vessels underneath P3.

Observations made during the experimental procedures indicated that polystyrene with a thickness of 100mm, is not recommended. This polystyrene was very uncomfortable for the horse immediately after application. Some polystyrene compressed outside the solar surface and was therefore not adequate for the object of the study.

It was concluded that polystyrene pads with densities of 32 kg/m^3 , 24 kg/m^3 and 16 kg/m^3 and thicknesses of 100mm and 60mm would prove similar support for the remainder of the period that they were applied follow a variable compression phase of less than 15 minutes. Further

research need to be done to investigate the effect of the polystyrene pad on the solar surface for a longer period.

Tesis Samevatting

DIE EFFEK VAN 'N AGTERSTEVOOR HOEFYSTER EN POLISTEREEN SOOL-ONDERSTEUNING OP DIE BIOMEGANIKA VAN DIE VOORSTE HOEF VAN 'N PERD

HENNING JONATHAN MOSTERT

Promotor: Prof AJ Guthrie

Mede-Promotors: Prof SS van den Berg, Mnr J Wannenburg

Departement: Departement van Chirurgie
Veterinêre Akademiese Hospitaal
Onderstepoort

Graad: MSc

Die doel van die studie was om die effek van die agterstevoor hoefyster, gedeeltelike dorsale hoefwand-verwydering en polistereen sool-ondersteuning op die biomeganika van die voorste hoef van die perd te ondersoek. Laminitis is 'n sistemiese sindroom wat essensieel die sensitiewe lamellae en papilla van die hoef affekteer. Dit veroorsaak erge pyn en lei meestal tot die loslating van die lamellae-hoef verbinding. Degenerasie van die lamellêre verbinding vind plaas en die distale falanks (P3) skei van die hoefwand. Dit veroorsaak dat P3 kan roteer in die rigting van die sool en in erger gevalle, kan P3 totaal losgaan van die hoefwand en afwaarts verplaas. Kroniese laminitis lei meestal tot die beëindiging van die dier se atletiese loopbaan of

die toepassing van genadedood.

Tydens 'n *in vitro* studie, is drie klinies gesonde perde op 'n genadige manier van kant gemaak en is die voorste ledemate versamel. Die hoewe is met agterstevoor hoefysters beslaan voordat die diere uitgesit, is en drie polistereen sool-ondersteunings met 'n digtheid van 32 kg/m^3 , 'n dikte van 60mm en 'n wigskuinste van 66%, 50% en geen wig onderskeidelik is in die studie gebruik. "Fuji Prescale Super" en "Ultra Super Low" drukfilm is gebruik om die drukverspreiding van die polistereen op die soolvlak van die hoewe te bepaal. Twee lasselle is gebruik om die krag wat onderskeidelik deur die hoefwand en die sool-oppervlak gedra is te bereken. 'n Konstant toenemende krag, met 'n maksimum van 66% van die perd se liggaamsmassa, is op die geamputeerde ledemate toegepas deur middel van 'n trekkrug toets-apparaat. 'n Totaal van vier eksperimente is op elke ledemaat uitgevoer.

Die resultate van die navorsing het bewys dat by al drie die polistereen sool-ondersteunings, ongeveer 75 - 80% van die totale krag wat op die ledemaat toegepas is, deur die sool- oppervlak gedra is. Die kleurveranderinge op die drukfilm het aangetoon dat meeste van die krag van die polistereen sool-ondersteunings met wigskuinste van 50% en 66%, deur die palmare helfte van die sool-oppervlak gedra is. Vir die sool-ondersteuning met geen wig, was die drukverspreiding oor die hele oppervlak gelyk. Die agterstevoor hoefyster met 'n 66% of 'n 50% polistereen sool-ondersteuning is dus aangedui as 'n geskikte manier om die druk oor die palmare area van die sool eweredig te versprei.

Tydens 'n *in vivo* studie is die effek van verskillende digthede (32 kg/m^3 , 24 kg/m^3 en 16 kg/m^3) en verskillende diktes (100mm en 60mm) polistereen sool-ondersteuning met 'n skuinste van

50% op die gewigsverspreiding van die sool-oppervlak en die hoofwand ondersoek. Samepersing van die polistereen oor tyd en die effek daarvan op die drukverspreiding, is ook ondersoek.

Die voorste ledemate van drie klinies gesonde perde, met 'n gemiddelde liggaamsgewig van 551kg, is netjies geknip en met agterstevoor hoefysters beslaan. Verwysingsdata is opgeteken met slegs die agterstevoor hoefyster aan die hoof. Verdere data is versamel vir die verskillende polistereen sool-ondersteunings. Data is opgeneem vir 4 sekondes teen 'n frekwensie van 50Hz. Tussen behandelings het die perde vir 5 minute op 'n beton oppervlak geloop. Die prosedure is herhaal met 5 minute, 10 minute en 15 minute tussenposes.

Uit die studie was dit nie baie duidelik watter soort polistereen die beste resultate vir sool-ondersteuning sou lewer nie. Die resultate vir al die sool-ondersteunings het 'n hiperboliese tendens getoon waarin die aanvanklike krag hoog was en mettertyd al hoe kleiner geword het. Die polistereen sool-ondersteunings met eienskappe van $32 \text{ kg/m}^3 \times 60\text{mm}$ en $16 \text{ kg/m}^3 \times 60\text{mm}$ dui op die geskikste behandelings. Waarnemings tydens die eksperimentele prosedure het aangetoon dat die $32 \text{ kg/m}^3 \times 60\text{mm}$ polistereen saamgepers is tot 'n digter en harder eindproduk as die $16 \text{ kg/m}^3 \times 60\text{mm}$ weergawe. Die eindproduk van die $16 \text{ kg/m}^3 \times 60\text{mm}$ sool-ondersteuning behandeling het na die eksperimentele proses nog steeds 'n mate van elasticiteit gehad wat 'n positiewe eienskap kan wees om die drukking van die bloedvate onder P3 te verminder.

Waarnemings wat tydens die eksperimentele proses gemaak is het aangedui dat polistereen met 'n dikte van 100mm nie aan te beveel is nie. Die polistereen was vir die perde baie ongemaklik

direk na aanwending. Die dikte en die wig van 50% het die hiele baie hoog gelig. Die hoeveelheid polistereen wat onder die hoefyster inkrul beteken verder 'n verlies van bruikbare materiaal en voldoen nie aan die doel van die projek nie.

Die gevolgtrekking van die eksperimentele werk (*in vivo*), is dat polistereen sool-ondersteuning met digthede van 32kg/m^3 , 24kg/m^3 en 16kg/m^3 en diktes van 100mm en 60mm dieselfde ondersteuning aan die sool bied na 'n tydperk van 15 minute vandat dit aangewend is. In die eerste 10 minute is daar 'n baie veranderende samedrukkings tydperk waaroor nie kommentaar gelewer kan word interme van tendense nie. Verdere navorsing is nodig om ondersoek in te stel na die ondersteuning wat die sool-ondersteuning bied oor 'n langer tydperk.

LIST OF FIGURES

=====

Figure 1: Distractive and supportive forces of the distal phalanx (P3). a) The downward load exerted by the weight of the horse through the bony column and distributed through the distal phalanx, b) the proximal-palmar pull of the deep digital flexor tendon from its insertion on the flexor surface of P3, c) the pulling force of the common digital extensor tendon, d) the lamellar attachment between P3 and the hoof wall and e) the distal phalangeal supportive function of the sole and frog.....5

Figure 2: Cross-section of the hoof of (a) a normal horse and (b) one suffering from laminitis. H, P and B are the angles that need to be determined to calculate the degree of rotation of the distal phalanx (P3). 12

Figure 3: Photograph showing the position of the reverse shoe on the hoof.....31

Figure 4: A photograph showing the position of the polystyrene pad on a hoof shod with a reverse shoe.....32

Figure 5: A photograph showing the initial steps to secure the polystyrene pad to the hoof shod with a reverse shoe, with elastic plaster (Smith+Nephew, VetBand, Adhesive Support Bandage, South Africa).....33

Figure 6: Modified number 0 and number 1 horse shoe and solar plate used in this study for the measurement of the load borne by the polystyrene pad and the hoof wall of a horse treated with a reverse shoe and polystyrene solar pad.....34

Figure 7: A photograph showing the experimental set-up for the measurement of the load distribution on the solar surfaces and hoof walls of cadaver limbs with partially removed

hoof walls and reverse shoes and polystyrene pads applied to them.....41

Figure 8: Different wedgings of polystyrene pads used in this study. The heel side was kept at full thickness and was gradually reduced towards the toe according to the wedge needed for the test. Therefore a 50% wedge had a thickness of 60mm at the heels and 30mm at the toe.43

Figure 9: A photograph showing the position of the pressure film between the polystyrene pad and the reverse shoe during the *in vitro* experimental procedure.....44

Figure 10: A photograph showing the position of the hoof, polystyrene pad and the pressure film on the load cell, after the total load was applied to the limb.45

Figure 11: Division of the pressure film into four quadrants, starting at the medial heel area and working clockwise for a right front limb, and anti-clockwise for a left front limb.47

Figure 12: Mean of the loads recorded for the load borne by the reverse shoe (the hoof wall), the polystyrene pad (sole) and the total load applied to the six limbs during an *in vitro* study done on cadaver limbs. * Significantly different from control.....52

Figure 13: Pressure distribution in the four quadrants of the solar surface area for three different wedgings of polystyrene pads. The four quadrants are defined as the area when a straight line is drawn on the line of the frog and another line is drawn perpendicular to that line at the quarters of the hooves. Mean values of quadrants with different letters were significantly different.....53

Figure 14: Diagrams of the distractive and supportive forces of P3 i) in normal hooves, ii) in laminitic hooves and iii) after the application of a polystyrene solar support. a) The downward load exerted by the weight of the horse through the bony column and distributed through the distal phalanx, b) the proximal-palmar pull of the deep digital flexor tendon from its insertion on the flexor surface of P3, c) the pulling force of the common digital

extensor tendon, d) the lamellar attachment between P3 and the hoof wall and e) the distal phalangeal supportive function of the sole and frog. (These diagrams and forces are not to scale.)54

Figure 15: Load cells were buried in a hole, with only the modified shoe and the solar plate visible above the ground. The horse stood on a level surface when one of its limbs was on the test apparatus.....64

Figure 16: Load on the solar surface for polystyrene pads with different densities (λ 24 kg/m³, σ 16kg/m³ and υ 32kg/m³) and the same thickness of 60mm. Mean values of time indicated by different letters, are significantly different.67

Figure 17: Load on the solar surface for polystyrene pads with different densities (λ 24 kg/m³, σ 16kg/m³ and τ 32kg/m³) and the same thickness of 100mm. NS: No significant difference.68

LIST OF TABLES

=====

Table 1: Geometrical measurements taken from the radiographs and corrected with the correction factor for the *in vitro* study done on six cadaver limbs to test the effect of a reverse shoe and polystyrene pads on the load-bearing of the sole and the hoof wall of hooves. *Distance from the toe of the dorsal hoof wall to the distal dorsal tip of P3 (mm)49

Table 2: Summary of the temperature and relative humidity recorded during the *in vitro* study done on six cadaver limbs for the analysis of the pressure film. The pressure film curves used to calculate the pressure applied to the film are sensitive to temperature and humidity changes, and the three symbols are indications of the curves used under specific conditions.50

Table 3: Load applied and load borne by the polystyrene pad, the hoof wall and total load measured in an *in vitro* study done on six cadaver limbs. * The load applied to limb 6 during treatment 2 was 3 kN. This was due to an operational error where the Tensile Testing machine was not stopped at 2.8 kN as required.....51

Table 4: Bodyweight and shoe sizes of the six limbs, as recorded for the three horses used in this study.....63

Table 5: Description of the different treatments used in this study. The different densities of the polystyrene pads were 32kg/m³, 24kg/m³ and 16kg/m³ and the two different thicknesses 100mm and 60mm.63

CHAPTER 1

GENERAL INTRODUCTION

=====

Laminitis is a systemic syndrome which ultimately affects the sensitive lamellae and papilla of the hoof, causing severe pain, and often leading to disruption of the lamellae-hoof wall interface^{5,6,51,65}. Degeneration of the lamellar interdigitation occurs and the distal phalanx (also referred to as P3) separates from the hoof wall. This can cause P3 to rotate towards the sole and in more severe cases P3 separates totally from the hoof wall and sinks downward^{5,6,38,51,59}. Chronic laminitis usually results in the end of the animal's athletic career and may lead to humane destruction.

The exact pathogenesis of laminitis is not known. Proposals for possible mechanisms that lead to the development of laminitis, include major damage to the lamellar basement membrane because of critical proteolytic events^{47,48,49,51,63}, lamellar ischemia as a result of arterio-venous shunts in the hoof^{6,42,51,60,63} and platelet deposition and thrombosis^{6,63}. Vasoconstriction within the digit, peri-vascular oedema, vascular perfusion defects³⁰, and digital veno-constriction^{6,38} are also pathophysiological mechanisms proposed to cause laminitis^{6,27,38,59}. Inflammatory mediators generated in organs like the gut, uterus and the skeletal musculature may cause laminitis when they reach the foot via circulation. They may act directly on the lamellar tissue, or may initiate reactions within the foot that begins the process of lamellar separation⁴⁷.

Laminitis research is being conducted on two fronts: Firstly, the aetiopathogenesis of the disease, knowledge of which could halt the progression of the disease to the chronic phase and secondly, the biomechanics of the hoof in order to understand what treatments may minimise further damage to the lamellae, reduce pain and assist the healing process. In a healthy horse, the entire weight is suspended

from the sensitive lamellae – in effect the horse hangs on the hoof wall. The sole is not supposed to bear any weight. The damaging of some of these lamellae causes more strain on the rest of the lamellae which may not be able to bear the total load. A solar pad will relieve some of the load on the lamellae by bearing part of the bodyweight of the horse.

The objectives of this study included:

- 1) investigating the effect of the reverse shoe and polystyrene padding on the biomechanics of the front hoof of the horse,
- 2) evaluation of the effect of the application of a reverse shoe and a polystyrene pad on the pressure distribution to the ground surface (solar and hoof wall surface) of the hoof. This includes the sole as well as the weight-bearing surface of the hoof wall,
- 3) determination of the effect of pressure distribution on the sole with different degrees of wedging of the polystyrene pad,
- 4) investigation of the effect of polystyrene pads with different thicknesses on the load distribution to the solar surface of the hoof over a time period of 15 minutes,
- 5) investigation of the effect of polystyrene pads with different densities on the load distribution to the solar surface of the hoof over a time period of 15 minutes.

The purpose of this study was to optimise the type of polystyrene pad to be used in the treatment of laminitis.

CHAPTER 2

LITERATURE REVIEW

2.1 ANATOMY OF THE NORMAL HOOF OF A HORSE

The hoof with all its sensitive structures can be seen as a modification of skin³⁵. The distal phalanx (P3) is suspended inside the hoof wall by interdigitating lamellae that surround it. Two lamellae can be classified: The dermal lamellae (sensitive lamellae) that cover the outer surface of P3, and the interdigitating epidermal lamellae (insensitive lamellae). The dermal lamellae consist of approximately 600 primary lamellae, which are oriented circumferentially around P3. Each of these primary lamellae consists of approximately 100 secondary lamellae. The dermal and epidermal lamellae interlock and these attachments are the primary forces that oppose the weight of the horse and successfully suspend P3 within the hoof^{20,25,51,65}.

The hoof wall consists of many highly keratinised tubules, which grow from the coronary corium. The solar corium is attached to the solar surface of P3²⁰.

The lamellar vasculature is complex. Arterial blood supply to the hoof is via the medial and lateral palmar or plantar digital arteries which arise by division of the medial palmar artery⁹. These arteries run alongside the flexor tendons. They provide branches to the coronary corium as well as the bulbs of the heel and supply the frog, the bars, the palmar coronary corium and palmar periople, the lamellae of the heel, the digital cushion and the lateral cartilage. The dorsal artery of P3 transverses the foramen in the palmar process of P3 and penetrates P3 approximately halfway to its dorsal surface to anastomose with the terminal arch. Approximately nine vessels routinely originate from the terminal arch and penetrate the distal aspect of the dorsal half of P3, forming the circumflex artery. The dorsal lamellar arteries,

which perfuse the dorsal lamellae, originate from the circumflex arteries and the terminal arch. Blood flow in the dorsal lamellar arteries is distal to proximal against the force of gravity^{20,25,30,51,65}. The blood flows through the lamellae to the veins²⁰. The corium of the sole is supplied by the solar plexus, which is formed by branches from the circumflex artery. This means that blood supply to the sole arises on the dorsal surface of P3 and then wraps under the distal margin of P3. It is therefore prone to damage from compressive forces. There are no major arterial branches directly under the frog^{20,25,30,51,65}.

There are three interconnected valveless venous plexuses in the foot. They are the dorsal venous plexus, which lies in the deep part of the dermal lamellae, the palmar/plantar venous plexus, which lies in the deep part of the solar corium and on the inner axial surfaces of the cartilage of the distal phalanx, and the coronary venous plexus, which lies in the coronary cushion covering the digital extensor tendon and the outer abaxial surfaces of the cartilage of the distal phalanx⁹. The medial and lateral digital veins drain these three plexuses.

2.2 FORCES OPERATING ON THE NORMAL HOOF.

The inherent biomechanical factors that are responsible for the maintenance of normal functioning of the structures in the hoof, include distractive and supportive forces of P3. (see Figure 1)

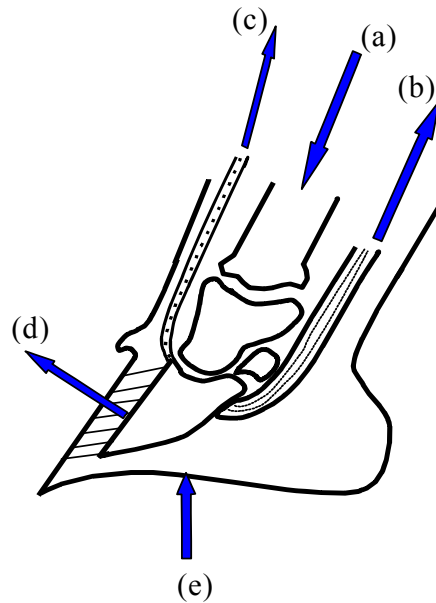


Figure 1: Distractive and supportive forces of the distal phalanx (P3). a) The downward load exerted by the weight of the horse through the bony column and distributed through the distal phalanx, b) the proximal-palmar pull of the deep digital flexor tendon from its insertion on the flexor surface of P3, c) the pulling force of the common digital extensor tendon, d) the lamellar attachment between P3 and the hoof wall and e) the distal phalangeal supportive function of the sole and frog.

The distractive forces of P3 include:

the downward load exerted by the weight of the horse through the bony column and distributed through the distal phalanx^{25,31,32,33,58} (a),

the proximal-palmar pull of the deep digital flexor tendon from its insertion on the flexor surface of P3^{25,31,32,33,58} (b).

The supportive forces of P3 include:

the pulling force of the common digital extensor tendon^{25,32,51} (c),

the lamellar attachment between P3 and the hoof wall^{25,31,32,51} (d),

the distal phalangeal supportive function of the sole and frog^{25,31,32,65} (e).

2.3 AETIOLOGY OF LAMINITIS

The aetiology of laminitis is multifactorial and will not be discussed^{5,6,19,21,46,51,59,60}.

2.4 PATHOGENESIS OF LAMINITIS

Currently, there are no predictive indices to determine whether a horse will develop laminitis after exposure to the inciting cause^{31,50}.

Laminitis can be classified into three phases

2.4.1 *The Developmental Phase*

This phase begins when the horse comes in contact with the inciting agent and ends with the first clinically evident signs of lameness^{51,57}. Systemic, as well as non-systemic, insults may be inciting agents for laminitis⁵⁷. The developmental phase generally lasts between 24 and 72 hours. Previous research has shown that two main pathological changes occur during this phase^{20,65}. There is vascular shunting and also coagulopathy, causing ischaemia to the secondary lamellae which results in laminitis. Pressure-mediated fluid filtration is more likely to cause lamellar oedema than the increase in vascular permeability³⁷. During the initial phase, there is an increase in blood-flow to the hooves, but a decrease in the perfusion of the lamellae. Permanent lamellar damage and movement of P3 within the hoof usually do not occur during this stage^{5,50}.

Recent research, however, shows that proteolytic events occur during the developmental phase of laminitis which initiate lamellar separation and the degradation of the lamellar basement membrane. A sub-lamellar vasodilation does occur during laminitis, but does not play as important a role as previously believed⁴⁷.

2.4.2 The Acute Phase

This phase begins with the first onset of clinical signs. Separation of the lamellae and displacement of P3 may occur^{5,65}. The clinical signs may include a bounding digital pulse, warm hooves, abnormal gait and a painful response over the toe region when being exposed to hoof testers^{5,51}.

The collateral circulation of the dorsal coronary corium, dorsal dermal lamellae and dorsal solar corium is less extensive than that of the palmar coronary corium, palmar dermal lamellae and palmar solar corium, and these locations are sensitive to decreases in digital blood flow²⁷. The pain that develops stimulates the adrenal gland to release catecholamines which act on alpha-receptors in the dermal vasculature within the hoof, causing vasoconstriction and decreased blood supply to the digit^{38,60}. Necrosis of the basement membrane and separation of the dermal lamellae cause an imbalance of the normal biomechanical forces, and the remaining lamellae shear away from the hoof wall^{19,38}. This deterioration of the lamellae, together with the downward load exerted by the weight of the horse, as well as the proximal-palmar pull of the deep digital flexor tendon, are responsible for the displacement of P3^{31,33}. Initially during the developmental phase of laminitis the lamellae stretch, resulting in a downward movement of P3 within the hoof^{19,38}. If the lamellar insult is severe enough, the important interlamellar bonds between the dermal and epidermal layer will be destroyed and result in distal displacement of the distal dorsal tip of P3. The distal rotation of the distal dorsal tip of P3 results in the loss of the parallel relationship between the dorsal hoof wall and the dorsal cortex of P3. Due to the detachment and stretching of the interlamellar bonds, spaces are created and gas extravasates into these spaces³³.

2.4.3 The Chronic Phase

Chronic laminitis occurs when there is a distal-palmar rotation of P3, and/or a distal sinking of P3 relative to the hoof wall surrounding it. Once these mechanical changes have occurred within the hoof,

the prognosis becomes poor^{5,51,65}. Displacement of P3 relative to the hoof wall causes the dorsal submural and coronary circulation to be subjected to shearing forces that will affect the circulation^{30,51}. The solar dermis is subjected to increasing compressive loads as it is trapped between the sole and P3.

If and when rotation of P3 occurs, it can vary from mild to severe. Severe rotation is often associated with separation of the coronary band over the extensor process region⁶⁰. When the lamellar bonds at the dorsum fail, the pull of the deep digital flexor tendon and the lamellar bonds of the quarter and heel sections causes rotation of the distal dorsal tip of P3 towards the sole^{27,51}. In severe cases the rotation of P3 causes the distal dorsal tip of P3 to penetrate through the sole^{51,59,60}. If the lamellar bonds all the way around the interior of the hoof loosen, P3 as a whole may displace distally. Such cases are referred to as sinkers^{51,60}.

2.5 SYMPTOMS OF HORSES SUFFERING FROM LAMINITIS.

Laminitis may occur in one, two, three or all four hooves in any combination, but is more common in the front hooves^{5,6,20,46}.

2.5.1 Clinical signs of laminitic cases

Pain, as a result of distracting or compression forces of the sensitive structures in the hoof, is the most important clinical finding. Obel clinically characterised and graded the severity of lameness using the following criteria^{32,37,38}:

- Grade 1: At rest the horse will shift weight occasionally. No lameness is evident at a walk, but a short stilted gait is noted at a trot,
- Grade 2: Horses move willingly at a walking pace, but the gait is stilted. A hoof can be lifted off the ground without difficulty,

Grade 3: The horse moves reluctantly and resists attempts to raise a limb,

Grade 4: The horse is recumbent most of the time, is in pain and has to be forced to move.

Other symptoms include the typical stance, bounding digital pulse, and sweating. Indentation at the coronary band (sinkers), flattening or bulging of the sole, penetration of the sole, oozing at the coronary band, elevated hoof wall temperature, pain detected over the toe region with hoof testers, are all signs associated with laminitis^{5,6,57,62}. Most horses become sound after administration of a basilar sesamoid nerve block^{6,33}. The nerve block will, however, cause further mechanical damage to intact lamellae due to painless movement, and is therefore not recommended^{20,21}. Nerve blocks may also affect the neuronal control of digital arteriovenous anastomoses and therefore potentiate digital ischaemia²¹. Abaxial sesamoid nerve blocks release the vasoconstrictor tone of the blood vessels and cause a dramatic rise in foot temperature, which increases inflammation of the lamellae⁴⁷.

2.6 DIAGNOSIS OF LAMINITIS

The diagnosis of laminitis can be made from the history, clinical symptoms and radiographs of the hooves^{5,42,59,62}.

2.6.1 Radiography and radiology of the hoof of a horse with laminitis

The relative positions of the structures in the hoof can only be identified by means of radiographs⁵⁹. Latero-medial radiographs are the most useful. This projection highlights the dorsal, palmar and solar surfaces of the phalanges and the interphalangeal joints. The hoof wall and sole thickness can also be identified by this projection⁴⁰. The solar surface of the hoof must be cleaned and loose horn removed. A drawing pin needs to be placed at the apex of the frog to indicate the position of the frog relative to

the distal dorsal tip of the pedal bone on the radiograph. This marker can however be misleading for the exact location of the apex may be hidden under an overgrowth of frog tissue⁵⁵. The apex of the frog must be carefully trimmed beforehand to observe the frog blending in the sole. At this specific point, the colour of the frog is darker than the sole^{43,44}. The dorsal wall must gently be rasped to remove loose or excessive horn and create a flat dorsal surface. A stiff straight metallic marker, like a piece of bale wire, of known length is then attached to the most dorsal point of the dorsal hoof wall with the upper end where the wall horn merges with perioplic horn⁴⁴. The wire must be positioned so that it is symmetrical with the tip of the frog. The length is important for the correction of radiological magnification. Barium paste may also be used⁵⁵. The animal must be radiographed standing squarely on a flat wooden block, thick enough to bring the solar surface of the foot level with the centre of the x-ray beam, with a wire marker that indicates ground level⁵⁵. When the horse steps onto the block, the other limb must be lifted. The centre of the radiograph beam (collimator) should be kept horizontal, and centred on the distal phalanx, at approximately the region of the deep digital flexor tendon attachment, a point approximately midway between the coronary band and the ground surface at the junction of the dorsal and middle thirds of the hoof^{7,55}. The beam should be aligned parallel with a line drawn across the bulbs of the heel⁷. It has to be parallel to the top of the block and perpendicular to the axis of the limb, so that a true latero-medial radiograph is produced^{6,9,20,21,59}. To avoid magnification errors, a constant distance between the hoof and collimator is recommended^{15,55}.

In the balanced hoof, the lateral radiographs show the phalanges to be in a straight line. The wire marker placed on the hoof wall is parallel to the dorsal surface of P3. There is a 5 to 10 degree slope between the solar surface of P3 and the bearing surface of the hoof^{7,59}.

Radiological features of laminitic cases without rotation are related to separation of P3 from the hoof. There is an increased distance between the dorsal hoof wall and P3⁴⁰. Radiological features of horses


suffering from rotation show a distal and palmar movement of P3 within the hoof. The parallel relationship between the dorsal cortex of P3 and the dorsal hoof wall is lost. There is an increased vertical distance between the upper end of the wire and the extensor process in sinkers as well as rotators^{5,7,19,20,33}. A soft tissue indentation along the coronary band may be seen or palpated⁵. Lamellar thickening and gas accumulation along the dorsal lamellae, lysis, hypervascularity and remodelling of P3 are all indicators of long-duration chronic laminitis^{33,40}. Penetration of the sole by P3 as well as subsolar abscessation filled with gas may be observed on the radiographs of a horse suffering from chronic laminitis³³.

For “sinkers” the entire P3 drops within the hoof. This, however, is difficult to observe from radiographs, as the dorsal wall of the hoof and the dorsal surface of P3 remain parallel. The distance between the coronary band and P3 and the indentation at the coronary band, can assist in the diagnosis of “sinkers”⁷, as well as an increase in the distance between the pedal bone and the dorsal hoof wall.


According to Eustace *et al*, three angles, namely the angle of the hoof wall with the ground surface (H), the angle of the dorsal surface of the pedal bone with the ground surface (P) and the angle of the bony column with the ground surface (B) can be measured from radiographs. The degree of rotation of the pedal bone (Angle R) and the degree of rotation relative to the long bone (Angle L) can be calculated (Figure 2))²⁰.

$$\text{Angle R} = \text{Angle P} - \text{Angle H}$$

$$\text{Angle L} = \text{Angle P} - \text{Angle B}$$

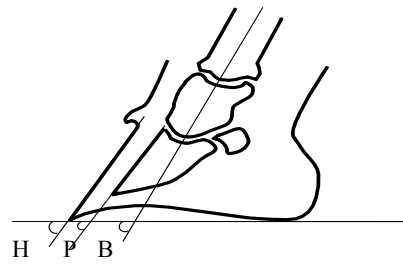

(a)



(b)

Figure 2: Cross-section of the hoof of (a) a normal horse and (b) one suffering from laminitis. H, P and B are the angles that need to be determined to calculate the degree of rotation of the distal phalanx (P3).

2.7 TREATMENT OF LAMINITIC CASES

The wide variation in the therapeutic approach to laminitis is indicative of our lack of knowledge and understanding of this complex condition.

The aim in treating laminitis must be to:

- 1) treat the initiating cause if known and if still present^{5,6,12,21,57,59},
- 2) relieve pain^{5,6,19,59},
- 3) re-establish the normal circulation to the hoof and hoof structures^{6,12,16,27,59},
- 4) prevent further damage of the sensitive structures in the hoof^{5,6,14,33,59,62,65},
- 5) increase the other supportive structures when the lamellae are damaged, the other supportive structures must be increased in order to maintain skeletal support^{12,33}. Frog support may assist

in the arrest of the rotation or displacement of the pedal bone^{9,21,58,60},

- 6) encourage new hoof growth^{19,59,65},
- 7) restore the parallel relationship between the hoof wall and P3^{16,27,60} and
- 8) prevent infection^{5,16,27,59}.

It is important to follow a holistic approach in the treatment of a horse suffering from laminitis.

2.7.1 Treatment of the Developmental Phase of Laminitis

The treatment during this phase is of a preventive nature and is based on the probability of the onset of laminitis. The objectives of the treatment include elimination of the inciting cause and decreasing of the blood-flow to the hoof by cooling and preventing or minimising the effect of collagenase or dissolution of the basement membrane^{41,57,65}. When more is known about the exact molecular mechanism of laminitis, a treatment which inhibits lamellar separation can be developed⁴⁷.

2.7.2 Treatment of Acute Laminitis

During this phase, treatment is directed towards the relief of pain, prevention of the displacement of P3^{27,41,57,65} and the treatment of all affected systems which may include septicaemia and shock⁶⁶. In sub-acute laminitis, lamellar damage may be minor and the horse may recover completely and the situation may not progress to a more acute phase⁵. The horse should be placed in a stall with sand or soft bedding to minimise concussion to the hooves which will create frog pressure. Encourage the horse to lie down^{5,51}.

Therapeutic approaches to prevent further displacement of P3 are based on supporting the skeletal column by packing the sole with various materials, frog support, the use of therapeutic shoes (heart-bar shoe, reverse shoe and others), dorsal hoof wall removal and surgical approaches (deep digital flexor

tenotomy)^{5,41,65}. Care must be taken not to apply too much pressure to the sole and the frog which could disrupt the solar circulation. The material must be applied to distribute pressure evenly⁶⁵. Preventing or delaying displacement of P3 minimises further damage to intact lamellae.

2.7.3 Treatment of Chronic Laminitis

This stage of laminitis needs to be handled with extreme care. The following decisions need to be made: 1) What type of therapeutic shoe or non-traumatic application will be the best for the specific case? 2) Should the temporary hoof support be maintained or replaced? 3) Does the horse meet criteria elected for euthanasia⁵⁷? In an attempt to normalise the vascular perfusion and correct spatial orientation between P3, the hoof wall and the sole, therapeutic trimming is implemented^{27,65}. Therapeutic trimming will also be effective for the normalisation of hoof growth and of exposure to sepsis²⁷. When displacement of P3 occurs, the therapy for this phase depends on the severity of damage to lamellae within the digit, as well as the degree of rotation or displacement of P3. Therapeutic approaches may include hoof wall removal and corrective shoeing⁶⁵.

2.7.4 Trimming techniques for Laminitis

Correct trimming is important for the treatment of laminitis⁵⁹.

2.7.4.1) Medio-lateral balance:

Medio-lateral hoof balance can be established by ensuring the correct relative lengths and angles of the medial and lateral walls of the hoof^{1,2}. Inappropriate medio-lateral balance causes uneven load distribution in the hoof. The medio-lateral balance is established by trimming the ground surface of the hoof perpendicular to the long axis of the limb (geometric balancing), or trimming the ground surface of the hoof so that the medial and lateral aspects of the heel land simultaneously (dynamic balancing)

^{1,2,6,59}.

2.7.4.2) *Dorso-palmar balance.*

For proper trimming, the silhouettes of the dorsal surface of the hoof and the pastern regions need to be parallel. For low hoof angles, either toe needs to be removed, or if not possible, the heels need to be elevated.

2.7.4.3) *Raising the heels:*

For laminitis cases with rotation, the rationale for raising the heels is to reduce the pull of the deep digital flexor tendon (DDFT). The load on the lamellae also seems to be reduced⁵⁴. Methods to reduce the pull of the DDFT vary from non-invasive to invasive, i.e. raising the heels to severing the DDFT.

Wedges are applied to the hooves of the horse to match the required angle⁵⁴. Knowing the optimal limit for elevation of the heels is essential. Elevation of 18⁰ reduces the pull of the deep digital flexor tendon significantly⁵⁴. Excessive elevation could change the orientation and vertical load exerted on P3 by P2 and create a potentially destructive shearing force between P3 and the hoof wall³⁶. When raising the heels, the secondary effects on the fetlock angle must also be considered because changes in this angle may affect the deep digital flexor tendon and the extensor branch of the suspensory ligament to the extensor process. The strain on the flexor tendons and the suspensory ligament does not change when the heels are elevated, because a decrease in load through the suspensory system and its extensor branch would reduce the force on the extensor process and thus limit any possible counterbalancing force to rotation³⁶.

Advantage:

- 1) Decreases the tension of the deep digital flexor tendon^{6,60}.

Disadvantages:

- 1) Disturbs toe-heel balance⁶⁰,
- 2) Focuses compression weight-bearing forces on the extensor process and on the distal dorsal tip of P3⁶⁰,
- 3) When the heels are raised, the lamellae are aligned more perpendicular to the ground surface, and this may result in the sinking of the bony column. It also changes the orientation and vertical load exerted on P3 by P2, creating a potentially destructive shearing force between P3 and the wall^{9,45}.

2.7.4.4) *Deep digital flexor tenotomy.*

Tenotomy of the DDFT totally eliminates the pulling force of the tendon and can be performed in the palmar- plantar aspect of the pastern, or in the mid-metacarpal/metatarsal region⁶.

A small incision is made through the skin, subcutaneous tissue, and sheath of the DDFT. While the distal limb is flexed to relax the tendon, a pair of curved haemostats is used to isolate the tendon. The DDFT can be transected with a scalpel blade. The tendon sheath may be closed with absorbable sutures, or left open³³.

Advantage:

- 1) Removes all pull in DDFT, and therefore prevents further rotation of P3⁶.
- 2) Relief pain¹⁸.

Disadvantages:

- 1) The athletic career of a horse will come to an end after DDFT tenotomy as the animal will not

be able to perform to the same standard as before. This procedure can therefore only be performed in animals suited for breeding²⁷,

- 2) Scar formation may occur at the tenotomy site and this is sometimes associated with pain⁶²,
- 3) Requires constant hoof care afterwards since the toe grows out longer and the solar surface at the toe increases in thickness⁶²,
- 4) The benefit of tenotomy only lasts for approximately one year²⁷.

2.7.5 Hoof wall removal

The aims of hoof wall removal are the following:

- 1) To minimise the physical laceration of the compromised lamellae along the dorsal aspect of the hoof wall and ease break-over. This helps with the prevention of further separation of P3 from the hoof wall, and further damage to the lamellae^{1,5}. If the toe is too long, it needs to be trimmed,
- 2) To drain fluid or abscesses,
- 3) To remove old, dead hoof wall tissue^{26,27,46},
- 4) To establish spatial orientation between the hoof wall and P3^{26,27,46},
- 5) To relieve pressure at the coronary band. This will enhance blood circulation and new horn growth. New hoof growth occurs mainly from the coronary corium and grows in tubules. The new growth follows the old growth distal in the hoof wall. Abnormal growth caused by laminitis will therefore be perpetuated by this growth pattern^{26,27,46},
- 6) The re-establishment of normal vascular perfusion can be achieved by separation of new growth from old abnormal growth^{26,27,46}.

Removal or thinning of the dorsal hoof wall is important in horses with excessive distal phalangeal

rotation (more than 6°) and sinking (more than 0.5cm), slight rotation or sinking that increases with time and when sepsis is present^{27,52,65}. Redden disagrees with this statement and questions the efficacy of dorsal hoof wall removal⁵³. He suggests drilling a hole through the hoof wall for exposure of necrotic tissue and to relieve pressure associated with the accumulation of fluid.

2.7.5.1 Methods of hoof wall removal

There are two major methods of hoof wall removal: a) hoof wall removal, where a portion of the distal aspect of the hoof wall is removed with a rasp^{25,52,64} or a circular sander^{25,64}, or b) hoof wall stripping, which is the removal of full-thickness sections of the hoof wall^{25,26,27}.

2.7.5.1.1 Dorsal hoof wall removal:

Dorsal hoof wall removal can be done in 3 grades: a) distal 3rd, b) distal 2/3rds, and c) total removal. When a rasp is used, the hoof wall is removed dorsally, dorso-laterally, and dorso-medially. For total removal of the hoof wall, removal starts approximately 1.0 to 1.5cm distal to the coronary corium, and proceeds distally to the weight-bearing surface^{25,26,52,64}. One can also start distally at the toe and work proximally until all dead epidermal tissues is removed. Approximately the dorsal third of the hoof wall circumference needs to be removed^{26,27}, more than this may severely compromise the wall stability³³. The hoof wall is gradually removed until the tissue that remains is somewhat soft, spongy to the touch, and pinkish-white²². Most of the necrotic brown-coloured haemorrhagic lamellae will be removed in the process^{25,26,52}. One should avoid penetration of the sole and the underlying tissues, unless they are undermined and necrotic⁵². Daily examination of the hoof and cleanliness is essential to minimise complications such as infection.

Advantages:

- 1) Hoof wall removal or trimming will ease break-over of the hoof, which in effect reduces the

strain of the deep digital flexor on P3 and reduces the possibility of mechanical tearing of the remaining intact sensitive tissues⁴⁶,

- 3) The procedure for dorsal hoof wall removal does not normally require general anaesthetic, as live tissue is not invaded²⁰,
- 4) It will reduce or can even remove the pressure-induced ischaemia at the coronary corium and will therefore ease growth of the coronary corium. Hoof wall removal alleviates the compressive forces on the dorsal coronary corium^{16,25,27},
- 5) Enough hoof wall is left for the application of a therapeutic shoe^{9,25,26,27},
- 6) This technique exposes necrotic tissue and effects drainage of infected lamellae^{8,9,25,52,65},
- 7) The status of the lamellar tissue can be evaluated,
- 8) The removal of dead horn allows the new growth from the coronary corium to realign with the sensitive lamellae and can prevent lamellar wedging^{6,25,26,27,46,62,64},
- 9) It normalises the spatial orientation of the dorsal hoof wall with P3.

Disadvantages:

- 1) Dorsal removal requires a relatively long convalescence, depending on the amount of hoof wall removed^{46,62},
- 2) Redden questions most of the advantages of dorsal hoof wall removal noted above⁵³. He states that P3 rotation does not have an influence on hoof growth, therefore removal for this reason is unnecessary,
- 3) Redden also questions the approach of removing exposed necrotic tissue. Sometimes only one third of the necrotic tissue can be exposed during hoof wall removal⁵³.
- 4) Wall resection cause a lost of structural integrity of the hoof capsule and therefore destabilise the hoof capsule¹⁶.

2.7.5.1.2 Hoof wall stripping

For dorsal hoof wall stripping, the hoof must be locally anaesthetised. A burr can be used to groove the hoof distally on the white line, proximally (depending on how much of the wall tissue needs to be removed), on either side of the section to be removed. The depth of the grooves is increased until the sensitive lamellae are reached. The hoof wall is then grasped with shoe pullers distally and lifted off in a proximal direction. An appropriate wound dressing is applied until the exposed area has keratinised sufficiently^{25,26}.

Advantages:

- 1) Hoof wall stripping can be beneficial in hooves with submural abscessation with or without secondary drainage and with separation at the hair-periople junction²⁵,
- 2) Other advantages are the same as with wall removal or trimming.

Disadvantages:

- 1) Stripping of the dorsal hoof wall causes a lot of trauma and pain to the hoof, and is not recommended for general treatment of chronic laminitis^{27,33,46,62},
- 2) A long recovery period is required.

2.7.6 Therapeutic shoeing of laminitic horses

The general aims for therapeutic shoeing of horses with laminitis are to change the weight distribution in the hooves in an attempt to⁶⁴:

- a) reduce pain^{27,33,45},
- b) decrease strain on compromised lamellae^{27,33},
- c) prevent or minimise P3 rotation or sinking^{6,25,64}, and

- d) enhance circulation to the coronary band and stimulate balanced hoof growth^{6,64}.
- e) Transfer load to the less affected part of the wall⁴⁵.

Most commonly used shoes include non-adjustable and adjustable heart-bars²⁵, reverse shoes with pads⁶⁴, reverse shoes with heart-bars, egg-bar shoes with and without heart-bars, regular shoes with different pads⁵, other shoes with pads⁵².

2.7.6.1 Heart-bar shoe

Adjustable and the non-adjustable heart-bar shoes are used in practice for frog support^{20,22,25,27,28}. The non-adjustable heart-bar shoe, is a bar shoe with a sagittal frog plate (heart-bar) extending dorsally from the bar, with an incline that puts pressure on the frog after it has been nailed into position. The adjustable heart-bar shoe has an adjustable heart-bar, hinged on a sleeved tube on a rounded bar. The incline of the heart-bar can be adjusted with an Allen screw without re-shoeing the horse²⁸. For both the adjustable and non-adjustable heart-bar shoe, the hoof is trimmed and large portions of dorsal hoof wall may be removed, the sole is made concave, and the frog is trimmed to maximise the surface area in contact with the heart-bar. The cranial point of the heart-bar shoe is positioned approximately 1.3 to 1.9 cm palmar to the dorsal aspect of the distal dorsal tip of P3²⁸. Failure to adhere to this may result in rotation. The heart-bar shoe should be 0.15 cm narrower than the medial and lateral extent of the frog and should not exert pressure on the sole. The pressure of the bar on the frog is then adjusted to be as great as possible, without significantly worsening the lameness. After shoeing, the hoof must be covered with elastic tape to prevent accumulation of debris around the bars of the shoe²⁷. Pressure adjustments must be made once or twice a week, and the heart-bar shoe must be reset, usually at 6- to 8- week intervals²⁸.

Advantages:

- 1) The heart-bar shoe supports and stabilises P3 by supporting the frog^{23,25},
- 2) Redistribution of weight-bearing on the frog and hoof wall can be accomplished by adjusting the pressure exerted on the frog by the frog plate, to the optimum pressure. Thus, the adjustable heart-bar shoe is of more therapeutic value than the non-adjustable heart-bar shoe²⁷,
- 3) The heart-bar shoe decreases the pressure exerted by P3 on the solar vascular plexus and therefore increases digital perfusion^{25,28}. The pressure applied by the heart-bar shoe minimally affects remaining digital perfusion, because there is an absence of major blood vessels in the area when pressure is applied²⁵,
- 4) It attempts to decrease further tissue damage and alleviate pain during hoof regrowth^{25,28}.

Disadvantages:

- 1) The frequent removal and reapplication of the shoe damages the already sensitive hoof wall and is a painful procedure²⁷. The adjustable heart-bar shoe is more beneficial than the non-adjustable shoe as it does not need to be replaced as often²⁸,
- 2) The estimation of the optimal pressure can be difficult, especially for the non-adjustable heartbar shoe. Too much pressure can cause increased lameness and too little pressure negates the benefit of the shoe^{25,27},
- 3) It is difficult to maintain optimal pressure on the frog with the non-adjustable heartbar shoe because as the heel grows out, the pressure on the frog decreases^{25,27,28},
- 4) Heart-bar shoes do not stabilise or prevent distal phalangeal rotation in all acutely or severely affected horses, and have not been significantly rewarding³⁹,
- 5) The use of heart-bar shoes without dorsal hoof wall removal, leads to increased pressure beneath the dorsal hoof wall, causing increased lameness²³,
- 6) Solar or circumflex vessel compression from the heart-bar if placed too far dorsally, can cause

regional ischaemia and solar necrosis²⁵. If the heart-bar extends too far abaxially, palmar or plantar vessels may be occluded at, or before they extend through, the bony foramen at the entrance of the semilunar canal, resulting in digital ischaemia²⁵. If the heart-bar is wider than the frog, it may occlude the palmar or plantar digital artery²⁸,

- 7) The heart-bar shoe can accelerate cellular death and lamellar breakdown if not used properly⁵²,
- 8) Cross-treading of the Allen screw or the support bar may cause difficulties^{25,27},
- 9) Formation of abscesses or granulation tissue can occur under the heart-bar if applied incorrectly^{25,27},
- 10) The shoe is technically difficult to make and apply^{16,58},
- 11) Horses with subsolar haematomas or abscesses cannot be treated with the heart-bar shoe²⁵,
- 12) The mechanical pressure used to force the coffin bone into a normal angle will cause some degree of necrosis of the frog^{53,58},
- 13) The pressure applied to the sole is very concentrated and may cause further damage to the frog, the sole and the blood flow²⁸,
- 14) Radiographs are needed for the correct placement of the heart-bar Shoe¹⁶.

2.7.6.2 *Reverse shoe*

The main effect of the reverse shoe is to redistribute the load to the more palmar aspect of the hoof, which is usually less severely affected. This shoeing method results in a more even pressure distribution that will enhance even growth of the hoof from the coronary band^{42,62}. A modification of the reverse shoe is the reverse even-frog pressure shoe (REFP). The REFP is a combination of the adjustable heart-bar shoe and the reverse shoe. It has an adjustable steel frog plate that is parallel to the frog, so that the pressure on the frog is a uniform pressure applied to the entire bearing surface of the frog⁴². A properly sized shoe must be fitted toe-to-heel, reversing the normal position so that any remaining hoof wall at the toe does not have contact with the shoe.

Advantages:

- 1) The reverse shoe displaces the centre of gravity of the horse palmarly, and in effect moves the weight-bearing on the digit palmarly and removes weight-bearing from the compromised dorsal laminae⁴²,
- 2) Minimal weight is transferred to the dorsal coronary band and results in more normal alignment of the new growth of the hoof in the toe area^{8,42,62,64},
- 3) The open toe eases the break-over at the toe and decreases the shearing force at the P3-hoof wall interface⁴²,
- 4) With the reverse even-frog pressure shoe, more frog support is possible and an increase of the frog pressure decreases total weight-bearing on the hoof wall⁴².

Disadvantages:

- 1) The reverse shoe does not stabilise P3⁹,
- 2) If the tip of the frog plate of the REFP shoe is too palmar to the solar pivotal point of P3, rotation of P3 may occur⁴²,
- 3) There is uncertainty about the correct placement of the shoe in relation to P3.

2.7.6.3 Solar support

This approach transfers some load-bearing from the hoof wall to the solar surface.

Support of the hoof, especially support of the sole and frog has been recommended²⁷. Various methods of sole support have been documented, which include plaster of Paris, (3M), standing the horse in sand or mud, or packing the sole with acrylic or silicone caulking or sponge rubber. These are all methods for distributing the load evenly over the sole⁶⁴.

When using acrylic or silicone caulking, a reverse⁶⁴ or heart-bar⁶⁶ shoe is nailed onto the hoof, with a leather or plastic pad between the hoof and the shoe. The acrylic or silicone caulking is then injected between the pad and the sole, to provide a cushion between the pad and the sole.

A hoof pad with a solar pad was designed for the treatment of laminitis and is called a Lily Pad (Lily Pad, Therapeutic Equine Products, P.O. Box 36176, Indianapolis, IN 42636). The proposed action of Lily pads is to stabilise P3. They also result in an elevation of the heel and decreases tension on the deep digital flexor tendon²⁹. In a recent study, it was found that these pads were not effective in accomplishing increased stability. This conclusion was drawn due to the absence of clinical or objective improvement²⁹. The pads may cause a subtle mechanical compression on the sole which is mild in the beginning, but increases with time. The pads may also cause compression of the blood vessels in the solar area, which compromises the vascular supply to the hoof. The correct placement of the Lily pad is critical for the correct treatment of a horse with laminitis²⁹.

Advantages:

- 1) Solar support provides a more even distribution of weight away from the hoof wall²⁹,
- 2) Load distribution is over the entire ground surface and not limited to the frog,
- 3) It assists in stabilising P3.

Disadvantages:

- 1) One cannot ascertain the exact amount of pressure transferred to the sole,
- 2) One cannot determine the effect on the blood supply of the sole,
- 3) Rigid products may lead to solar necrosis,
- 4) The pads need to be cut to size.

2.7.6.4 *Reverse shoe, partial dorsal hoof wall removal and polystyrene solar support (RDPS).*

The reverse shoe and polystyrene solar support is an attempt to combine the advantages of the reverse shoe, solar padding, the heart-bar shoe and the reverse even frog pressure shoe in the treatment of horses with chronic laminitis⁶². This treatment technique is proposed by the Equine Veterinary Clinic of the Veterinary Academic Hospital, Onderstepoort, and is designed to apply pressure uniformly over a large area of the solar surface of the hoof. Extremely satisfying results were obtained from clinical cases treated with this technique. The most useful characteristic of polystyrene (Sagex, South Africa) for the treatment of laminitis, is the ability of the material to deform into the shape of the solar surface of the hoof while still maintaining a certain amount of elasticity. It can therefore support the bony column and stabilise P3. Using polystyrene in a solar pad is cheap and it is readily available.

Another advantage of this technique over others is its even load distribution over the solar surface area and the hoof wall. Contouring and shaping of the polystyrene support pad is an attempt to reduce compression of the blood vessels and terminal arch vessels. Wedging of the pad is an attempt to create less pressure on the more sensitive areas, which includes the toe area, and to provide a more even distribution of pressure over the entire underfoot surface.

2.8 EXPERIMENTAL BIO-MECHANICAL MODELS OF THE DISTAL DIGIT.

In order to study the biomechanical effects of the RDPS technique on the digit, a review of research conducted in the fields of equine digital biomechanics and bio-kinematics is necessary.

2.8.1 *Hoof wall biomechanics*

Colles used foil strain gauges attached to the hoof wall to detect changes in hoof shape in shod and unshod horses¹³. He concludes in his study that the vertical strain measured in the hoof wall may relate

to the vertical weight-bearing force borne by the hoof wall. His system is however valuable for rapidly changing strain, rather than static measurement. In another study, Douglas, *et al* found that the hoof wall is thinner at the quarters than on the dorsal surface, and also has a lower stiffness¹⁷. They also found that during the stance phase of the stride, the magnitude of the surface strain at the dorsal wall is not substantially different from the surface strain at the quarters. This indicates that the load at the dorsal wall is greater than at the quarters¹⁷. These findings are consistent with those of Colahan, *et al*¹¹. When *in vitro* experiments are conducted on the hoof wall, it is important to keep in mind the change of the moisture content of the hoof wall, and the effect thereof on the measurements^{17,34}.

Barrey used an instrumented horse shoe to measure load distribution on the hoof for different gaits³. He concludes that the anatomical regions are adapted to their biomechanical functions. The caudal region has a damping function, the central region has a supporting function for heavy loads and the cranial region has a propulsion function.

2.8.2 Biokinetic studies of the digit

Bartel, *et al* developed a procedure based on an analytical model to determine the internal forces in the digit of the horse⁴. The internal forces can be calculated from input data which includes external forces between the hoof and the ground, configuration of the digit during the support phase of gait, and the internal geometry of the digit. P3 and the navicular bone were taken as a unit. The internal forces for this unit include the force of the bony column on the coffin joint, the force due to the suspensory navicular ligament, the force due to the deep flexor tendon and the force of the ground on the hoof.

2.8.3 Solar surface measurements

Pressure measurements

Different techniques for measuring pressures of the horse's hoof have been developed, which include modified horse shoes^{3,24} and strain gauges^{13,61}. In a recent study, prescaled pressure-sensitive film was used to determine the centre of pressure of the soles of hooves of the forelimbs of horses standing on a flat level surface¹¹. The position of the hoof was recorded on sheets of white paper and carbon paper that were aligned with the film in a purpose-built cassette. In the experiment the animal stood with its one hoof on the cassette and the other on a wooden block of the same size. Pressures were then recorded on the film and the pressure distribution was read with a densitometer^{10,11}. The centre of pressure was found to be located in the medial heel area of the hoof.

The advantage of this technique is that measurements can easily be made. Variables that must be dealt with during this procedure include the trimming techniques of the farrier, the effect of environmental conditions on the film, the condition of the solar surface and the hoof wall and also the behaviour of the horse^{10,11}.

CHAPTER 3

MATERIALS AND METHODS

3.1 HOOF PREPARATION FOR THE APPLICATION OF THE REVERSE SHOE

The hoof was trimmed geometrically to a point of medio-lateral and toe-heel balance. This means that the hoof was symmetrical from a dorsal, palmar and solar surface view.

3.2 RADIOGRAPHY

The hoof was prepared for radiography and radiographs were taken according to the standard operating procedures of the Section of Radiology at the Academic Veterinary Hospital, Faculty of Veterinary Science, Onderstepoort.

The radiographs were evaluated for any malformations of the hooves. According to Eustace *et al*, three angles, namely the angle of the hoof wall with the ground surface (H), the angle of the dorsal surface of the pedal bone with the ground surface (P) and the angle of the bony column with the ground surface (B) can be measured from the radiographs²⁰. The degree of rotation of the pedal bone (Angle R) and the degree of rotation relative to the long bone (Angle L) can be calculated

$$\text{Angle R} = \text{Angle P} - \text{Angle H}$$

$$\text{Angle L} = \text{Angle P} - \text{Angle B}$$

The distance from the distal dorsal tip of P3 to the tip of the dorsal hoof was measured. The thickness of the hoof wall was measured at two points, namely at the distal dorsal tip of P3 and dorsally at the proximal limit of the flat surface of P3. These measurements were recorded by drawing a line perpendicular to the level of the dorsal surface of P3 and then the distance between this line and the

dorsal hoof wall was measured.

3.3 PARTIAL HOOF WALL REMOVAL

For this study, the distal 3rd of the dorsal hoof wall was partially removed using a rasp. Removal of the toe started at the most distal dorsal point of the toe, with the rasp held at an angle perpendicular to the solar surface. In each case the hoof was rasped so that the dorsal wall formed a flat plane until either the pinkish colour of the lamellae was visible, or until the dorsal branches of the shoe perpendicular to the shoe were met. The hoof wall was gradually removed until what remained was somewhat soft and spongy to the touch, and pinkish-white. Care was taken not to penetrate the sole and the underlying tissues.

3.4 SHOEING THE PREPARED HOOF WITH A REVERSE SHOE

In each case, either a number 1 or a number 0 shoe was applied in the reversed position. The tip of the round end of the shoe (toe of the shoe) was in line with the vertical line along the bulb of the heels when the horse stood erect. The position of P3 was obtained from latero-medial radiographs and the heels of the shoe was positioned 1cm dorsal to the distal dorsal tip of P3 (Figure 3). This position was important to ease break-over of the foot with the pivotal point at the heel of the reverse shoe and not at the distal dorsal tip of P3. In clinical cases this position may decrease unnecessary strain on the sensitive lamellae.

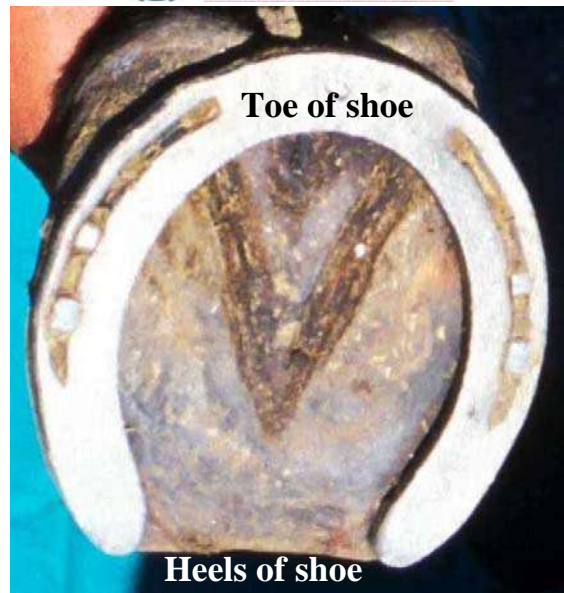


Figure 3: Photograph showing the position of the reverse shoe on the hoof

3.5 CALIBRATION OF THE LOAD CELLS FOR USE IN THE EXPERIMENTAL PROCEDURES.

The load cells (Load Cell Services, South Africa) were calibrated in a Schench 100kN Tensile Testing Machine (Calibration certificate number 5484.SFS190 SABS –Force Metrology, South Africa). A specific load was applied to the load cells and the voltage output (V) for that specific load in Newton was recorded. This volts/Newton value was used as the calibration factor for the load cells. The calibration value for the HBM-KWS 3073 strain amplifier used in this study was also recorded for the specific Volt/Newton value and was used to check the calibration of the cells during the test. During the tests, the voltage output of the load cells was recorded with a PL202 Diagnostic Instrument. After the tests, the data were downloaded with a RS232 port and were saved in ASCII format. The results were processed with the Matlab for Windows Student version 4.2 Computer Programme (The Mathworks, Inc).

3.6 APPLICATION OF THE POLYSTYRENE PAD TO THE PREPARED HOOF

A polystyrene pad was made from a square block of polystyrene which was big enough to cover the ground surface of the hoof. A print of the reverse shoe was made on the polystyrene block. The inner area of the print was cut out with a jigsaw. The dorsal end of the polystyrene was cut off 1 cm palmar to the heels of the reverse shoe (Figure 4). For the wedging, the desired percentage thickness of the polystyrene in millimetres was measured on the side of the toe of the shoe, and the polystyrene was then wedged from total thickness on the side of the heels to the mark on the side of the toe.



Figure 4: A photograph showing the position of the polystyrene pad on a hoof shod with a reverse shoe

For application to the hoof, the pad was placed in position on the solar surface of the hoof. The pad was secured to the hoof with elastic bandage (Smith+Nephew, VetBand, Adhesive Support Bandage, South Africa). Short strips of elastic bandage were placed medial to lateral and dorsal to palmar, followed by full circling of the hoof (Figure 5). The bandage did not cover any part of the coronary band, so as not to compress the blood supply to already compromised tissue.



Figure 5: A photograph showing the initial steps to secure the polystyrene pad to the hoof shod with a reverse shoe, with elastic bandage.

3.7 PURPOSE-MADE EQUIPMENT FOR THIS STUDY

3.7.1 Solar plate

A solar plate was designed and made to be able to measure the load borne by the polystyrene pad filling the solar surface. The plate was made from 5mm steel. It was cut to fit into the inner area of either a number 0 or number 1 shoe. The solar plate screwed onto the top load cell so that it could measure vertical displacement caused by the load of the horse (Figure 6). The load caused by the solar area can be calculated using this vertical displacement.

3.7.2 Modified shoe

A number 0 and a number 1 shoe were modified to stabilise the foot of the horse when it stepped onto the measuring system. After the solar plate was attached to the load cell, the modified shoe was attached firmly to the cell with the plate filling the inner area of the shoe. The shoe had four spacers, so the reverse shoe on the hoof fitted firmly onto the modified shoe to stabilise the horse's hoof (see Figure 6).

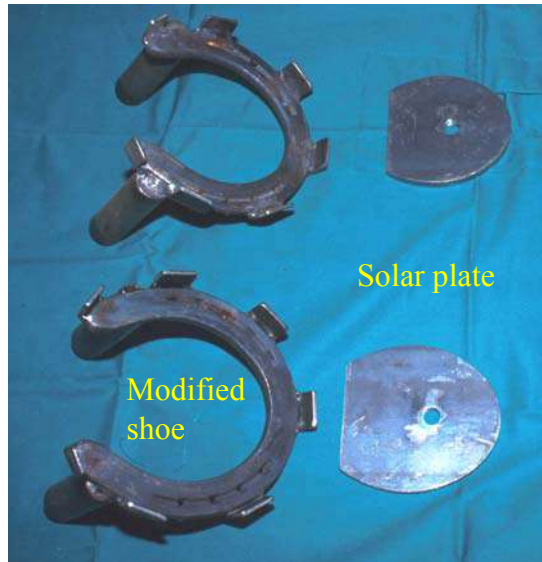


Figure 6: Modified number 0 and number 1 horse shoe and solar plate used in this study for the measurement of the load borne by the polystyrene pad and the hoof wall of a horse treated with a reverse shoe and polystyrene solar pad.

CHAPTER 4

INVESTIGATION INTO THE *IN VITRO* EFFECT OF A REVERSE SHOE AND POLYSTYRENE PADDING ON THE BIOMECHANICS OF THE FRONT HOOF OF THE HORSE

4.1 INTRODUCTION

Laminitis ultimately affects the sensitive lamellae and papilla of the hoof, causing severe pain, and often leading to disruption of the lamellae-hoof wall interface^{5,6,51,65}. Degeneration of the lamellar interdigitation occurs and the distal phalanx (also referred to as P3) separates from the hoof wall. This can cause P3 to rotate towards the sole and, in more severe cases, P3 separates completely from the hoof wall and sinks downward^{5,6,38,51}. Chronic laminitis usually results in the end of the animal's athletic career or demands humane destruction.

Therapeutic shoeing is often used in an attempt to treat laminitis. The aim of therapeutic shoeing is to change the weight distribution in the hoof in an attempt to reduce pain^{27,33,64}, decrease strain on compromised lamellae^{27,33}, prevent or minimise P3 rotation or sinking^{6,25,64} and to enhance circulation to the coronary band and stimulate balanced hoof growth^{6,64}.

Most commonly used shoes include non-adjustable and adjustable heart-bar shoes²⁵, reverse shoes with pads⁶⁴, reverse shoes with heart-bars, egg-bar shoes with and without heart-bars, regular shoes with different pads⁵, reverse even frog pressure shoes⁴², other shoes with pads⁵². Using solar pads transfers some load-bearing from the hoof wall to the solar surface. Support of the hoof, especially support of the sole and frog has been recommended²⁷. Various methods to provide sole support have been documented, including: plaster of Paris, (3M), standing the horse in sand or mud, or packing the sole

with acrylic or silicone caulking or sponge rubber^{64,66}. The proposed action of solar pads is to stabilise P3. It also results in an elevation of the heel and decreases tension on the deep digital flexor tendon²⁹. Solar support over the entire solar surface provides a more even distribution of weight away from the hoof wall⁶⁴.

The application of the reverse shoe and polystyrene solar support is an attempt to combine the advantages of the reverse shoe, the heart-bar shoe, the reverse even frog pressure shoe and solar padding in the treatment of horses with chronic laminitis⁶². This approach is designed to spread pressure uniformly over a large area of the solar surface of the hoof. The most useful characteristic of polystyrene for the treatment of laminitis is the ability of the material to deform into the shape of the solar surface of the hoof, while still maintaining a certain amount of elasticity. It can therefore support the bony column and stabilise P3.

The aim of this study was to investigate the effect of the reverse shoe, partial dorsal hoof wall removal and polystyrene solar support on the *in vitro* biomechanics of the front hoof of the horse. The load carried by the hoof wall and the solar area was measured separately using two load cells. A constantly increasing load was applied to the limb by a tensile testing machine. A maximum load of 66% of the bodyweight of the horse was applied to the limb. Pressure-sensitive film was used to measure the pressure distribution of the load carried by the solar surface for each of the treatments.

4.2 MATERIALS AND METHODS

Three Thoroughbred horses donated by the South African Defence Force Veterinary Hospital, Potchefstroom were used in this study. These horses were scheduled for euthanasia and only horses with no history of laminitis, lameness or any other abnormalities in the front limbs, or radiological pathology were used. The hooves were trimmed and prepared for applying reverse shoes and

radiographs were taken. The reverse shoes were applied to the hooves prior to euthanasia. The limbs were amputated at the proximal radius. The experimental procedure was carried out as soon as possible post-euthanasia to prevent possible errors in the experimental data due to post-mortal changes. The horses were euthanased on three separate days after each horse was shod with a reverse shoe. All experimental work was done at the Faculty of Veterinary Science, Onderstepoort and at the Laboratory for Advanced Engineering (LAE), University of Pretoria.

4.2.2 Experimental Design

Hardware

Reverse shoe

Mustang shoes (Mustang, South Africa), which are mild steel horse shoes, were used as reference shoes, as they are commercially available and currently used by many farriers and veterinarians. The manufacturer donated the shoes needed for the project. The shoes were applied in the reverse position to the hooves, with the necessary alterations to fit properly. For a number 0 shoe, the ratio between the shoe area (hoof wall) and the inner area (sole), which was to be filled with the polystyrene pad, was 47,31% for the shoe and 52.69% for the inner area. For a number 1 shoe, the ratio was 46,11% for the shoe and 53.39% for the inner area. These figures were calculated using the finite element method. The principle of this method was to divide the shoe and inner area into small 1mm^2 elements respectively and count them. The sum of all the elements amounted to the area of the shoe (hoof wall) and the inner area (sole) of the shoe respectively ⁵⁶.

Polystyrene

Polystyrene is produced from benzene-ethylene, with polymerisation accomplished in the presence of catalysts using organic peroxides (Sagex, A division of MegaPlastics, South Africa). The mechanical

properties of polystyrene are density-dependent and it is therefore important to calculate the density needed for the purpose of this project.

The product is available in different sizes and different densities. Polystyrene with a density of 32kg/m^3 and a thickness of 60mm was used in this study. These values were calculated by assuming that a horse puts 66% of its body weight onto the one forelimb when standing on that limb. Using equation 1 and the compressive strength tables (Appendix A), provided by the manufacturers (Sagex, Roodepoort, South Africa), the optimal density and thickness of the polystyrene can be calculated. Equation 1 was used to calculate the compression strength of the polystyrene pad for a hoof with a known solar surface and a load applied to the hoof (Equation 1).

Compression strength = Load borne by the front hoof (N)* / solar surface of the hoof (m^2)

*The load borne by the hoof is taken as 66% of the total bodyweight of the horse. (1)

The solar area for a hoof shod with a number 1 shoe was calculated with the finite element method as 290mm^2 and for a number 0 shoe as 1692mm^2 . For a horse with a body weight of 500kg and therefore a load of 3237.3 N on the front limb, the compression strength was calculated as $141.37 \times 10^4 \text{N/m}^2$ for a number 1 shoe and $191.33 \times 10^4 \text{N/m}^2$ for a number 0 shoe. The compression strength at yield of the polystyrene used in this study had to be lower than the compression strength calculated. This would ensure that the polystyrene was compressed and deformed according to the solar surface of the hoof. The compression strength at yield for different densities of polystyrene obtained from the graphs supplied by the manufacturer was $6 \times 10^4 \text{N/m}^2$ for the 16kg/m^3 , $13 \times 10^4 \text{N/m}^2$ for the 24kg/m^3 and $18 \times 10^4 \text{N/m}^2$ for the 32kg/m^3 (Appendix A). From the values calculated for the hooves, the polystyrene would definitely deform. The compression modulus (Young's Modulus) (E) is an indication of the stiffness of the material. Small values of E indicate that the material will still be

flexible, and higher values of E indicate that the material becomes more stiff and rigid. From the graphs supplied by the manufacturers, the compression modulus at yield of the polystyrene used in this study was $100 \times 10^4 \text{ N/m}^2$ for the 16 kg/m^3 , $200 \times 10^4 \text{ N/m}^2$ for the 24 kg/m^3 and $300 \times 10^4 \text{ N/m}^2$ for the 32 kg/m^3 . From these numbers it is clear the 16 kg/m^3 is more flexible than the 24 kg/m^3 and the 32 kg/m^3 which became rigid after the application of a load to the pad. The 16 kg/m^3 polystyrene pad also “springs back” to its normal position after the load has been released, while the 24 kg/m^3 remains in its new deformed state, and even more so for the 32 kg/m^3 .

The stiffness of polystyrene makes it a good material for use as a solar pad. The stiffness is a non-linear function, which has the same effect as a mattress. For a lower load, it compresses to a point and with a higher load, it will compress more. In both cases the deformation will be plastic and therefore will maintain that form. This enables polystyrene to give solar support over the total surface of the deformed pad for the different loads applied to different places on the pad. Material that is more elastic, for example silicone, does not have the same supportive system as polystyrene.

Pressure Film.

Fuji Prescale Super and Ultra Super Low-Pressure film (Fuji Film, Fuji Photo Film Co. LTD, Tokyo, Japan) was used in this study to indicate the pressure distribution of the polystyrene on the solar surface of the hoof. This film is composed of an A-film, which has a layer of micro-capsulated colour-forming material in it, and a C-film which includes a layer of colour-developing material. The colour-forming microcapsules break at different pressures, allowing one to obtain the desired colour density. This density can be measured with a densitometer or other techniques. This film is sensitive to changes in both temperature and humidity and the recorded values need to be corrected using correction factors (Appendix B). The Ultra Super Low-Pressure and Super Low-Pressure films that were used in this study have pressure ranges of $0.2 - 0.6 \text{ MPa}$ and $0.5 - 2.5 \text{ MPa}$, respectively. Both these types of

pressure film were used, as only a certain amount of film was available for the experimental work and there was not enough of either type alone for completion of the task. The continuous pressure method, as indicated by the manufacturers, was used in this study. For this method, the pressure was increased gradually to the given level and maintained at that level for 20 seconds.

Tensile Testing Machine

The tensile testing machine (J.J. Tensile Testing Machine, Type T5 000, Lloyd Instruments South Hampton, UK) consists of a vertical frame with two vertical screws on which a crosshead is fitted. A calibrated load cell was connected to the crosshead. The hoof rested on another calibrated load cell (Route, Rulp, 5 ton, ser #. 11716) that measured the total load exerted on the solar surface. The load distribution of the hoof wall was measured by subtracting the total load applied to the limb, measured with a load cell (Load Cell Services, 1 ton, ser # 29560) connected to the top of the tensile testing machine, from the load measured with the load cell connected to the bottom of the machine. Metal clips stabilised the hoof to the surface on which it rested. These clips formed part of a purpose-built platform on the bottom load cell (See Chapter 3). The outputs of the testing machine were connected to an amplifier (HBM-KWS 3073 Signal Conditioner, Germany) for data recording (Figure 7).



Figure 7: A photograph showing the experimental set-up for the measurement of the load distribution on the solar surfaces and hoof walls of cadaver limbs with partially removed hoof walls and reverse shoes and polystyrene pads applied to them.

Experimental Layout

The horse was weighed and its body mass was recorded on the data sheet. The hoof was prepared for radiography. Latero-medial radiographs of P3 of the hoof of the live animal were taken according to the standard operating procedure at the Onderstepoort Veterinary Academic Hospital (OVAH).

A piece of straight wire, with a length of 80.5mm, was lain on the dorsal surface of the hoof wall from the coronary band to the distal point of the hoof to facilitate investigation of the parallel relationship between P3 and the dorsal hoof wall. A thumb tack was put onto the tip of the frog to assist in identifying the relationship between the tip of P3 and the tip of the frog on the radiographs.

The hoof was trimmed geometrically to a point of latero-medial and toe-heel balance. This means that the hoof was symmetrical from a dorsal, palmar and solar surface view.

Geometrical measurements of the hoof were noted and included: (Appendix A)

- a) The lengths of the medial and lateral heels, as measured from the coronary band hairline down to the weight-bearing surface of the hoof,
- b) The angle of the toe to the ground.

From the radiographs, the following data were determined:

- c) The distance from the dorsal hoof wall toe to the distal dorsal tip of P3 (tip distance),
- d) The angle of P3 to the ground surface,
- e) The perpendicular proximal and distal distance from the dorsal hoof wall to the dorsal surface of P3 (hoof wall thickness),
- f) The angle of the solar surface of P3 to the sole.

The distal third of the hoof wall at the toe was removed with a rasp. Removal of the toe started at the most distal-dorsal point of the toe, with the rasp held at an angle perpendicular to the solar surface. The hoof was rasped so that the dorsal wall formed a flat plane and until the pinkish colour of the lamellae was visible. The horses were then shod with either a number 1 or a number 0 shoe in the reversed position. The toe of the shoe was in line with the vertical line along the bulb of the heels when the horse stood erect. The heels of the shoe were 1cm dorsal to the distal dorsal tip of P3. The position of P3 was obtained from latero-medial radiographs. The toe was shortened to meet the dorsal branches of the shoe in a perpendicular fashion to the shoe. For each hoof polystyrene pads, with a thickness of 60mm, were prepared by providing three separate square blocks of polystyrene which were big enough to cover the ground surface of each hoof. A print of the reverse shoe was made on the polystyrene. The inner area of the print was cut out with a jigsaw. A second pad was wedged to a slope of 66%, which means that a third of the total thickness of the polystyrene was measured at the toe and the polystyrene was then wedged from total thickness on the side of the heels to the mark at the toe. A third pad was wedged to 50%, which means full thickness on the side of the heels to 50% of the

thickness at the toe (Figure 8).

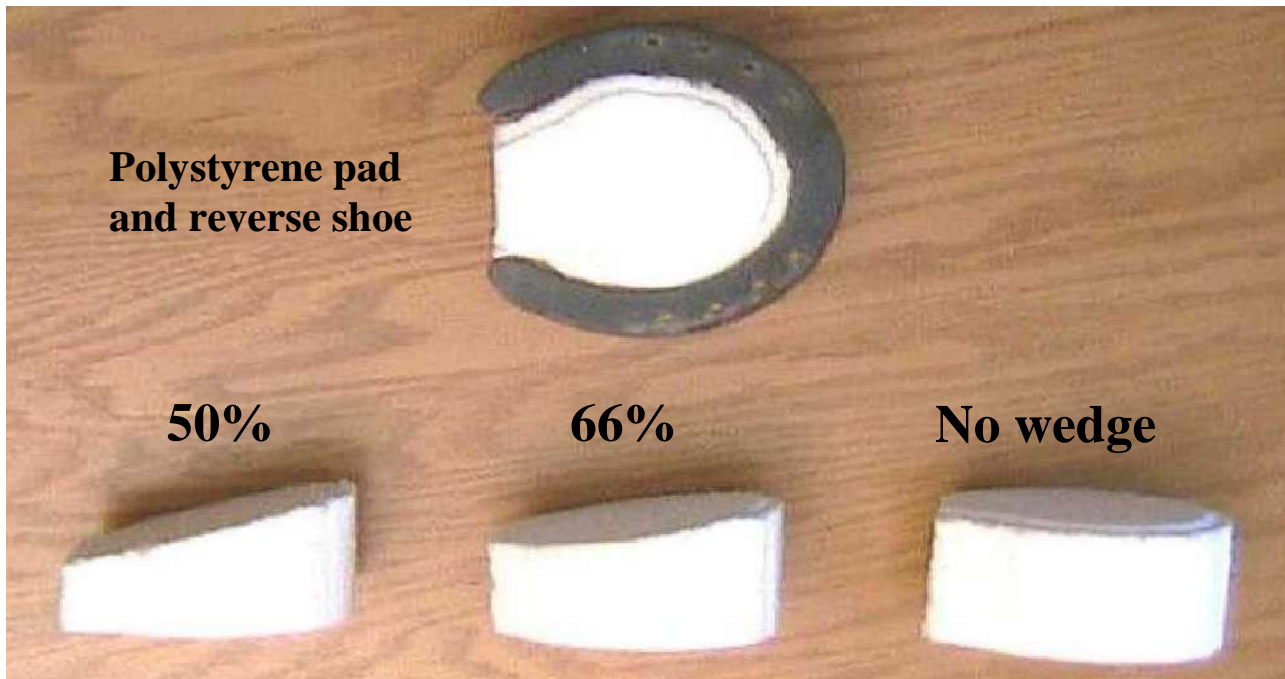


Figure 8: Different wedgings of polystyrene pads used in this study. The heel side was kept at full thickness and was gradually reduced towards the toe according to the wedge needed for the test. Therefore a 50% wedge had a thickness of 60mm at the heels and 30mm at the toe.

The horse was euthanased and the limbs amputated. The severed ends of the limbs were covered with plastic bags and labelled. They were put in plastic refuse bags in a cool box with ice, and transported to the Laboratory of Advanced Engineering (LAE), University of Pretoria.

Each limb was mounted in the tensile testing machine so that application of a vertical load to the limb caused the carpus and the fetlock to move as if bearing weight normally. The loads for this study were calculated as 66% of the bodyweight of the specific horse whose limb was used in the specific test. The assumption was made that 66% of the body weight of the horse is carried on the front limbs. A further assumption was that a limb carries the whole of the 66% load when the horse is standing on that limb.

The outputs of the tensile testing machine and load cells were connected to the amplifier. For the load cells, compression had a negative reading and tensions a positive reading. Data recording from the load cells were at a sampling rate of 0.5 Hz. Outputs of the amplifier were connected to a PC with an analogue to digital (A/D) card and A/D software.

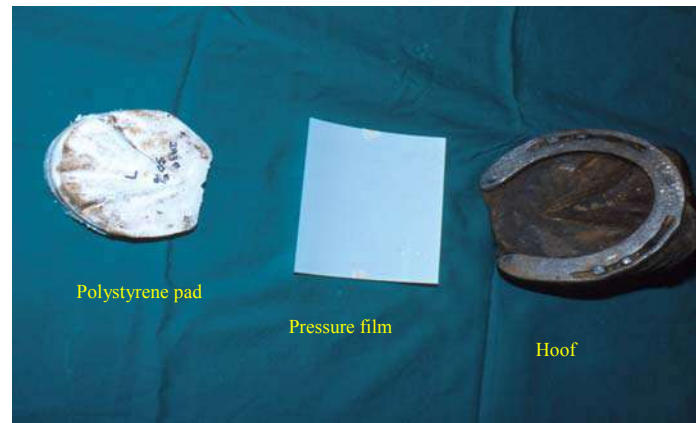


Figure 9: A photograph showing the position of the pressure film between the polystyrene pad and the reverse shoe during the *in vitro* experimental procedure.

The temperature and the relative humidity of the environment were measured using a Weather Monitor 2 (Product No. 7440, Davis Instruments, Hayward, USA). The pressure film and unwedged polystyrene pad was put in position in the inside of the reversed shoe to cover the sole of the hoof (Figure 9). The limb was connected to the tensile testing machine and the compression test was started.

It was sometimes necessary to cut off some of the polystyrene that protruded from underneath the shoe after compression. The load was then increased gradually to the calculated load. When the maximum load for the specific limb had been reached, it was kept constant for twenty seconds (Figure 10). The load was then released and the limb removed from the machine. A 66% and a 50% wedged polystyrene pad were used, respectively, after the initial measurement of the unwedged polystyrene. The tested limbs were put into a plastic refuse bag and were disposed of according to the standard operating procedure of the Department of Veterinary Pathology at Onderstepoort.

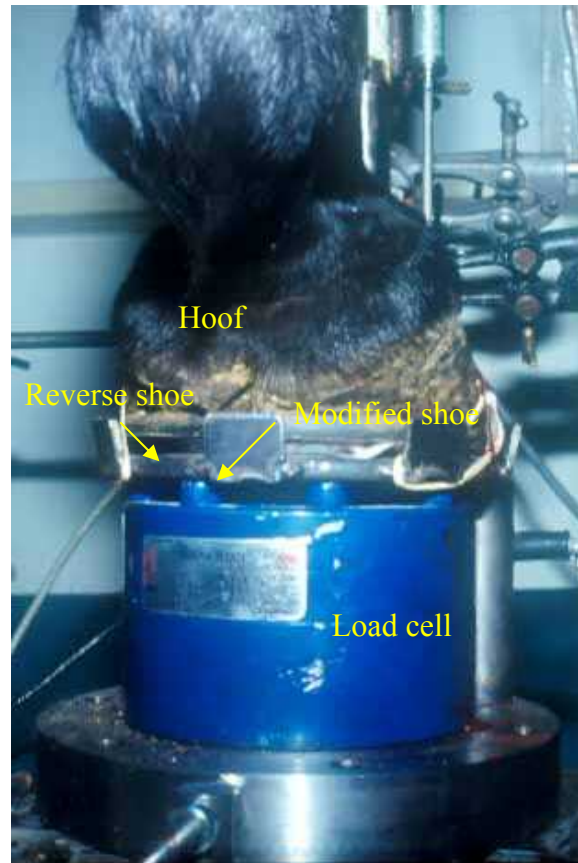


Figure 10: A photograph showing the position of the hoof, polystyrene pad and the pressure film on the load cell, after the total load was applied to the limb.

Data Acquisition

Treatments applied to each limb.

A total of four experiments were done on each limb. These included:

- 1) Collection of reference data on partially removed (distal third) hoof wall, shod with reverse shoe,
- 2) Collection of data on partially removed (distal third) hoof wall, shod with reverse shoe and an unwedged polystyrene pad,
- 3) Collection of data on partially removed (distal third) hoof wall, shod with a reverse shoe and a 66% wedged polystyrene pad,

- 4) Collection of data on partially removed (distal third) hoof wall, shod with a reverse shoe and a 50% wedged polystyrene pad.

The data for the pressure distribution in the four quadrants from the pressure films were calculated by using the SigmaScan (Image Measurement Software, USA) & Sigma ScanPro computer programmes (Automated Image Analysis Software) (Jandel Scientific Software, USA). The footprint on the pressure film was scanned into a computer file and converted to a greyscale picture. This picture was imported to the SigmaScan programme for further analysis. Reference data of the pressure per colour was obtained by converting the film manufacturer's colour calibration chart to a greyscale and then calculating the intensity of each colour on the testing strip. The footprints were then loaded into the SigmaScan programme as greyscale. The intensity of the footprint was then calculated using the *“annotation to determine average intensity across a grid”* procedure of SigmaScan Pro. This procedure works on the principle that a grid is drawn on an image. The average intensity of the pixels under the grid is measured. The average intensity is measured by calculating the sum of the grey level values of all pixels in a given object, divided by the total number of pixels in that object. The images in this experiment were uncalibrated and therefore, a value of 0 was full black and a value of 255 was full white. Each footprint was then divided into four quadrants with the line of the frog as a medial/lateral division, and a line halfway between the toe and the heels as a division between the dorsal and palmar halves (Figure 11). The mean value of each quadrant was then calculated using the SigmaPlot (Jandel Scientific software, USA) programme.

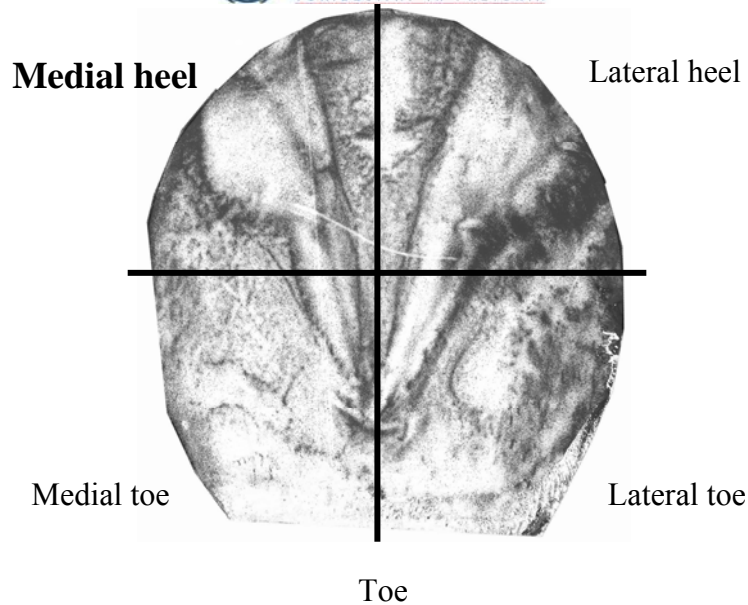


Figure 11: Division of the pressure film into four quadrants, starting at the medial heel area and working clockwise for a right front limb, and anti-clockwise for a left front limb.

4.2.3 Data Analysis

Statistical evaluation of the data was done with the aid of computer software (SigmaStat Statistical Software, Jandel Scientific Software, USA). The effect of the reverse shoe, without a polystyrene pad and then with 100%, 66% and 50% wedged pads were investigated using a One-Way Repeated Measures Analysis of Variance, and Tukey's Test was used to investigate differences between specific treatments which are summarised in Table 4. The effect of loads on the four solar quadrants for the three different wedges was investigated, using a Two-Way Analysis of Variance (ANOVA), and Tukey's Test was used to investigate differences between specific treatments (Appendix D). For all the statistical interpretations, the significance level was set at $p < 0.05$.

4.3 RESULTS

The bodyweights of the three horses used in this study were 423kg (horse 1), 506 kg (horse 2) and 430kg (horse 3), respectively. The loads used during the experimental procedures were approximately 66% of the measured bodyweight of each horse and were calculated as 2.750 kN for horse 1, 3.330 kN for horse 2 and 2.930 kN for horse 3.

The geometrical measurements taken from the radiographs in the *in vitro* study done on six cadaver limbs to test the effect of a reverse shoe and polystyrene pads on the load-bearing of the sole and the hoof wall of a hoof as well as the corrected values for the measurements are presented in Table 1. Table 2 is a summary of the temperature and relative humidity measured during the experimental procedure. These measurements were necessary in order to choose the appropriate curve to be used for the calculations of the pressures as indicated on the pressure film.

Table 3 is a summary of the load applied to the six cadaver limbs during the *in vitro* study and the load measured by the two load cells. The data obtained from the load cells included the load borne by the polystyrene pad and the total load. The load borne by the hoof wall was then calculated by subtracting the load borne by the polystyrene from the total load measured.

The means of the load-bearing of the reverse shoe (hoof wall), the solar surface and the total load applied to the limb are shown in Figure 12. This figure includes the means for all four treatments. These treatments include no use of a polystyrene solar pad, a pad with a 50% wedge, one with a 66% wedge and lastly a polystyrene pad with no wedging. Figure 13 shows the pressure distribution in the four quadrants of the solar surface of the hoof for the three different wedges of polystyrene pads. The three pads used included one with no wedging, a 66% wedge and a 50% wedge.

Horse	Limbs	Shoe size	Length of wire on radiograph (RG)	Correction factor	Angle of the toe (degrees)	Angle of P3 to ground (degrees)	Tip Distance(mm)*		Hoof wall thickness (mm)			
									Proximal		Distal	
							Measured	Corrected	Measured	Corrected	Measured	Corrected
1	Limb 1	1	86	0.936	43	44.5	37	34.63	16.8	18	17.7	19
1	Limb 2	1	91.5	0.8798	43	45	41	36.07	15.4	17.5	16.7	19
2	Limb 3	1	84	0.958	46.5	46.5	38	36.40	18.2	19	18.2	19
2	Limb 4	1	80	1.006	47.5	45	37	37.22	21.1	21	18.1	18
3	Limb 5	0	84.5	0.953	43	47.5	40	38.12	14.3	15	17.2	18
3	Limb 6	0	85.5	0.942	42	45	40	37.68	14.1	15	16	17

Table 1: Geometrical measurements taken from the radiographs and corrected with the correction factor for the *in vitro* study done on six cadaver limbs to test the effect of a reverse shoe and polystyrene pads on the load-bearing of the sole and the hoof wall of hooves. *Distance from the toe of the dorsal hoof wall to the distal dorsal tip of P3 (mm)

Horse	Limb	Temperature °C	Relative humidity %	Treatment	Pressure film curve used	
					Ultra Super Low	Super Low
1	1	25	98	no wedge	-	A
				66% wedge	-	A
				50% wedge	A	-
1	2	25	95	no wedge	-	A
				66% wedge	-	A
				50% wedge	A	-
2	3	22	65	no wedge	-	B
				66% wedge	-	B
				50% wedge	B	-
2	4	21	85	no wedge	-	A
				66% wedge	-	A
				50% wedge	A	-
3	5	21	52	no wedge	-	C
				66% wedge	-	C
				50% wedge	C	-
3	6	25	41	no wedge	-	C
				66% wedge	-	C
				50% wedge	C	-

Table 2: Summary of the temperature and relative humidity recorded during the *in vitro* study done on six cadaver limbs for the analysis of the pressure film. The pressure film curves used to calculate the pressure applied to the film are sensitive to temperature and humidity changes, and the three symbols are indications of the curves used under specific conditions.

Limb	Load Applied (kN)	Load measured (kN)	Treatment			
			No Polystyrene	No Wedge	66% Wedge	50% Wedge
1	2.790	Total	2.7401	2.7409	2.7429	2.7427
		Polystyrene	0.0438	2.3106	2.3066	2.4492
		Hoof wall	2.6963	0.4303	0.4363	0.29358
2	2.790	Total	2.7405	2.7772	2.7537	2.7450
		Polystyrene	0.0391	2.6046	2.3715	2.4667
		Hoof wall	2.7014	0.1727	0.3822	0.2783
3	3.300	Total	3.2480	3.2598	3.2577	3.2571
		Polystyrene	0.0249	2.1383	2.1141	2.1939
		Hoof wall	3.2231	1.1215	1.1436	1.0632
4	3.300	Total	3.2482	3.2503	3.2576	3.2435
		Polystyrene	0.1315	2.8165	2.3449	2.8428
		Hoof wall	3.1167	0.4338	0.9127	0.4004
5	2.800	Total	2.7613	2.7725	2.7742	2.7788
		Polystyrene	0.0789	2.1665	1.9957	2.3432
		Hoof wall	2.6824	0.606	0.7785	0.4356
6	2.800 (*treatment2 =3.000)	Total	2.7791	2.9433	2.7756	2.7746
		Polystyrene	0.019	2.0165	2.2759	2.1589
		Hoof wall	2.7772	0.9268	0.4997	0.6154

Table 3: Load applied and load borne by the polystyrene pad, the hoof wall and total load measured in an *in vitro* study done on six cadaver limbs. * The load applied to limb 6 during treatment 2 was 3 kN.

This was due to an operational error where the Tensile Testing machine was not stopped at 2.8 kN as required.

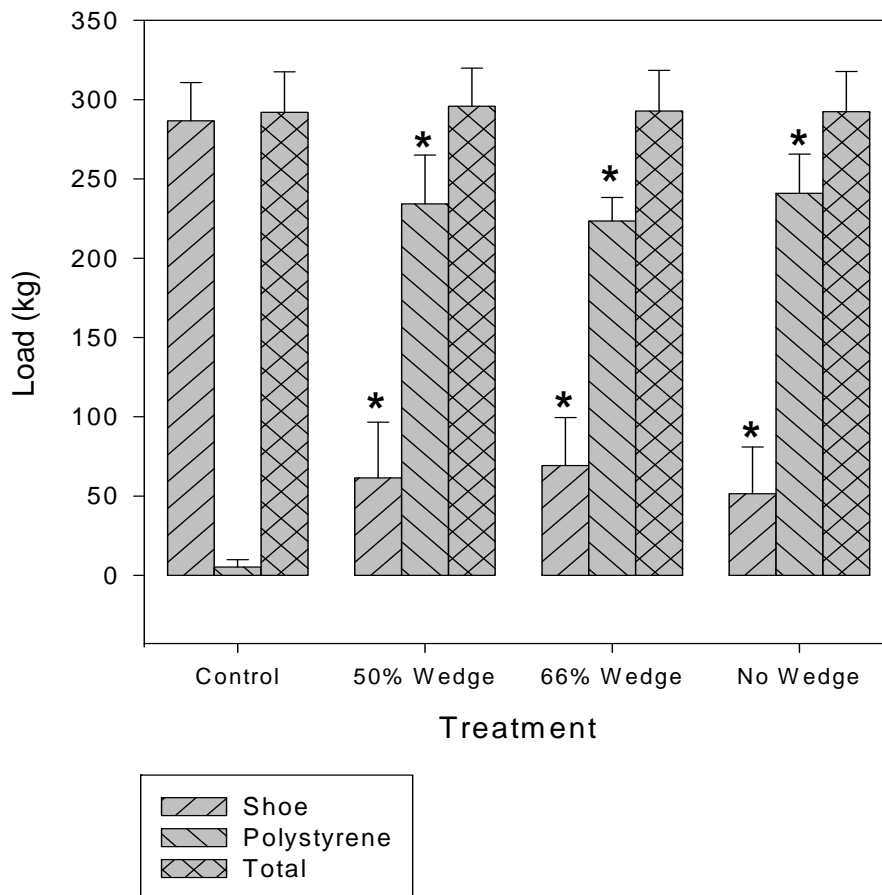


Figure 12: Mean of the loads recorded for the load borne by the reverse shoe (the hoof wall), the polystyrene pad (sole) and the total load applied to the six limbs during an *in vitro* study done on cadaver limbs. * Significantly different from control.



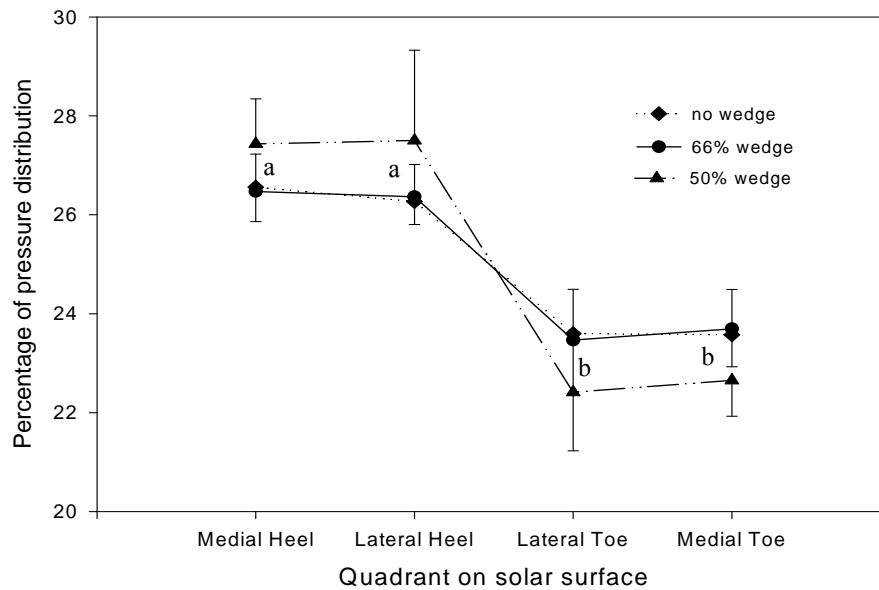


Figure 13: Pressure distribution in the four quadrants of the solar surface area for three different wedgings of polystyrene pads. The four quadrants are defined as the area when a straight line is drawn on the line of the frog and another line is drawn perpendicular to that line at the quarters of the hooves. Mean values of quadrants with different letters were significantly different.

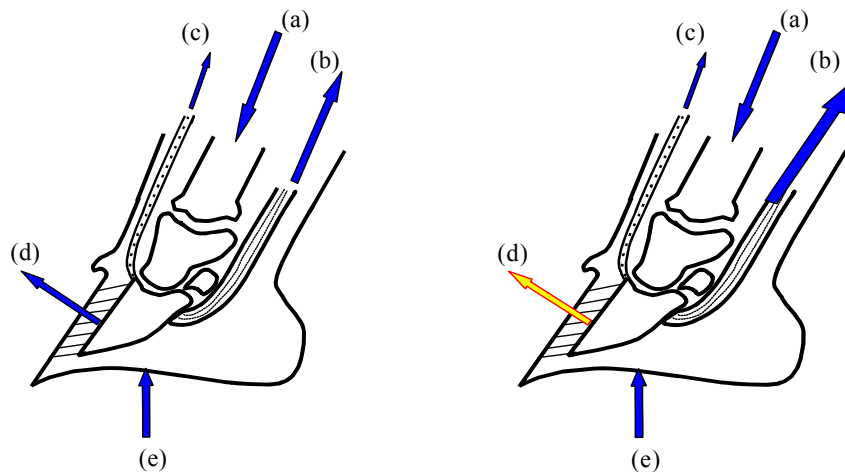

i) Normal hoof

ii) Laminitic hoof

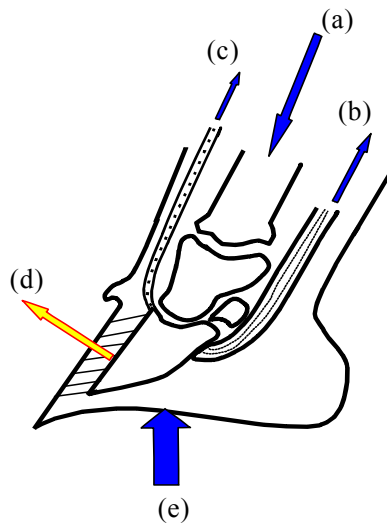

iii) With polystyrene pad

Figure 14: Diagrams of the distractive and supportive forces of P3 i) in normal hooves, ii) in laminitic hooves and iii) after the application of a polystyrene solar support. a) The downward load exerted by the weight of the horse through the bony column and distributed through the distal phalanx, b) the proximal-palmar pull of the deep digital flexor tendon from its insertion on the flexor surface of P3, c) the pulling force of the common digital extensor tendon, d) the lamellar attachment between P3 and the hoof wall and e) the distal phalangeal supportive function of the sole and frog. (These diagrams and forces are not to scale.).

4.4 DISCUSSION

Normal hooves

This study investigated the effect of a reverse shoe with polystyrene padding and partial dorsal hoof wall removal on the biomechanics of the hoof. The feet of horses with chronic laminitis do not exhibit identical pathological changes; therefore a study of normal feet should precede any studies on feet with chronic laminitis to obtain normal data to which later studies can be compared. The forelimbs of the horses were used in this study, because laminitis is more likely to occur in the hooves of these limbs. From the results obtained from the radiographs, it was shown that the hooves used in this study were all normal. The normal hoof wall thickness for most breeds varies between 15 to 18mm. A dorsal hoof wall thickness of 20mm and more may be the result of thickening of the soft tissues that may be caused by laminitis⁴⁰. The mean hoof wall thickness for all the hooves used in this study was less than 20 mm (Table 1).

The phalanges in all the feet used in this study were in a straight line and the dorsal surfaces of the pedal bones of the different hooves were parallel to the dorsal surface of the hoof wall. In laminitic cases the pedal bone starts to move distally and rotates within the hoof, causing a break in the digital axis. There is also a loss of parallelism between the dorsal surface of the pedal bone and the dorsal surface of the hoof wall²⁰. The angle of P3 to the ground surface, for Thoroughbred horses, was shown by PJ Cripps and RA Eustace to have a mean value of 47.6 degrees, with a standard deviation of 2.09¹⁵.

Accordingly to Table 1, the angles of P3 to the ground surface for all the hooves used in this study were within these criteria.

The distractive and supportive forces of P3, as indicated in Figure 14, change between normal hooves, laminitic cases and after the application of polystyrene pads. In laminitic cases, the stabilising or

supportive force, due to the lamellar attachment between P3 and the hoof wall, is decreased or lost. This is a very important force, because the horse is actually hanging in the hoof by these lamellar attachments. The loss of this supportive force can result in rotation of P3 as a result of the tension in the deep digital flexor tendon (DDFT), and in more severe cases, a sinking of P3 takes place due to the weight of the horse. The pulling force of the common digital extensor tendon cannot compensate for the DDFT force, and this imbalance may result in the rotation of P3 towards the pulling force of the DDFT⁵². When a polystyrene pad is applied to the hoof, the forces acting on P3 change. The polystyrene compensates for the lost in lamellar force by supporting P3. By filling the entire underfoot surface, the pad minimises the possibility of displacement.

Load borne by hoof wall and solar pad

The solar surface area comprises 53.39% of the entire underfoot surface implying indicates that a solar pad can relieve some of the load-bearing of the hoof wall. Figure 12 indicates that the polystyrene pads do have a significant influence on the distribution of load-bearing between the hoof wall and the solar surface. Approximately 79% of the total load was borne by the solar surface. Many researchers have documented the value of solar support in the treatment of laminitis. Frog support helps stabilise and support P3. This stability and support may decrease the strain on the compromised lamellae and reduce pain. In a study done on the reverse even frog pressure shoe, it was shown that an increased frog pressure decreases the weight-bearing on the hoof wall and therefore releases strain on the compromised lamellae⁶². The non-adjustable and adjustable heart-bar shoes also provide constant solar support. The adjustable heart-bar shoe is more beneficial than the non-adjustable shoe because the frog support given by the solar plate can be adjusted as the hoof grows^{20,25} or displacement continuous.

The heart-bar shoe is difficult to apply to the hoof. The wrong placement of the frog support may cause further damage to the sensitive tissues of the sole. It is also difficult to estimate the optimum pressure

that has to be applied to the sole by using the heart-bar shoe. With the adjustable heart-bar shoe, this problem can be minimised, but it also may cause further damage if not applied correctly. Other disadvantages of the adjustable heart-bar shoe is the possibility that the thread of the Allen screw may be damaged during the application of the shoe, and the shoe may have to be removed and replaced. Abscesses can also occur under the frog due to the pressure²⁷. The polystyrene pad applied for solar support is more beneficial than the heart-bar or the reverse even frog pressure shoe, because the pad can be fitted to the hoof without difficulty. The pressure is distributed over the whole solar surface and is not concentrated on the frog only. Polystyrene is also a soft material which could minimise solar necrosis. For significant solar support, polystyrene pads proved to be a good approach.

Load-distribution for different wedged pads

There was no difference in the load-distribution between the shoe area and the solar area for the three different treatments. The total load applied to the limb during the experiments was higher than the compression yield strength of the polystyrene pads used in this study. The pads compressed and deformed according to the solar area, regardless of the wedging of the polystyrene pad. A further explanation for the apparent lack of differences between the different treatments, may also be the cutting off of the excess polystyrene that protruded underneath the shoe after compression, especially for the no-wedged polystyrene pad. The excess material destabilised the reverse shoe on the measuring apparatus and caused inaccurate measuring of the load applied to the solar area.

Pressure distribution on the solar surface

The pressure film used in this study gave an indication of the pressure distribution on the solar surface of the hoof. Table 2 presents the temperatures and humidity values measured during the tests. This information was important for calculating the correction factor for the pressure film. Figure 13 indicates the effect of the difference wedges of the polystyrene pads. There was a significant difference

between the load-bearing of the medial and lateral heel area on the one hand, and the medial and lateral toe on the other hand. No significant differences were found between the loads measured between the medial heel and lateral heel or for the medial toe and lateral toe areas. The three different treatments showed no significant differences. For all three treatments, the pressure distribution was approximately 60% of the total pressure carried by the palmar half and 40% by the dorsal half of the solar surface. Therefore, a greater load was borne by the heels than by the toe area of the sole. This distribution is very important for the minimisation of damage to the blood vessels which wrap around the dorsal end of P3.

The damaged lamellae in the laminitic hoof cause abnormal loading of the remaining lamellae. A reverse shoe compensates for the abnormal load bearing in the damaged area by shifting the load more towards the palmar surface of the hoof. Application of the reverse shoe alone is not sufficient, because the total load has to be carried by the hoof wall.

Colahan *et al.*^{10,11}, found in both their studies that the centre of pressure was located in the medial heel area. In their study, they used a cassette made from plywood and Plexiglas and applied a load of 200kg to the hoof for 2 minutes. They measured the load-distribution on the whole underfoot surface. From the results shown in Figure 13, the load was distributed evenly in the heel area. An explanation for the differences between the present study and the study of Colahan *et al.*, could be the use of different types of material in the studies. In the present study, pressure distribution for the solar area was evaluated, while Colahan *et al.*, investigated the total underfoot area. The differences in load, applied to the hooves (270 – 330 kg in the present study, and 200kg in the study of Colahan *et al.*) and the time that the loads were applied to the limbs (20 seconds in the present study, and 2 minutes in the study of Colahan *et al.*) may also have influenced the results. Both studies agree that the heel area bears more weight than the toe area. This is therefore an indication that with the application of the polystyrene pad,

the load at the toe area in a laminitic case will be less and will be shifted to the less severely damaged heel area of the foot. The load of the polystyrene pad on the solar surface is distributed over the whole solar surface and not on the frog alone. This approach is therefore an improvement on the non-adjustable and the adjustable heart-bar shoes^{25,27} and the reverse even frog pressure shoe⁴². For this approach, it is only necessary to replace the pad and not the reverse shoe, for at least the first four to five weeks (This is based on observations made from clinical cases). This gives the hoof time to heal and the hoof wall will not be damaged by the frequent replacement of the shoe as in the case of the heart-bar shoe²⁷.

4.5 CONCLUSION

This study indicates that the application of the reverse shoe with polystyrene padding does have a beneficial effect on the biomechanics of the hoof of a normal horse. The first conclusion is that the polystyrene pad creates a load shift in the normal hoof. The second conclusion is that most of the load applied to the hoof is now carried by the solar area, and especially by the palmar half of the solar surface.

Because of the even distribution of the pressure on the solar surface, the treatment as described in this study, is more advantageous than the reverse even frog pressure shoe or the heart-bar shoe. By applying the polystyrene pad, load-bearing at the dorsal half of the hoof wall is decreased and further tissue damage is minimised.

The pressure concentration on the palmar half of the sole may minimise the negative effect on the blood supply to the sole. The characteristics of the polystyrene make it a very useful material for solar padding. Its compressibility, without becoming rigid, prevents the development of solar necrosis. The polystyrene also deforms and fills the whole solar surface which enlarges the weight-bearing area.

The results of this study must not be seen to be the ultimate treatment in all cases of laminitis, but merely as another step in the approach to counteracting this dreadful condition.

CHAPTER 5

INVESTIGATION INTO THE *IN VIVO* EFFECT OF A REVERSE SHOE AND POLYSTYRENE PADDING ON THE BIOMECHANICS OF THE FRONT HOOF OF THE HORSE

=====

5.1 INTRODUCTION

Throughout the years, many attempts have been made to address the problems of laminitis. The heart-bar shoe, reverse even frog pressure shoe and different types of solar padding were some of the attempts to address this problem^{22,28,42,64,66}.

The reverse shoe together with polystyrene padding, with a thickness of 60mm, density of 32kg/m³ and wedge of 50% as a treatment for laminitis, has been proved to be very promising in clinical cases of laminitis treated at the Veterinary Academic Hospital, Faculty of Veterinary Science, Onderstepoort. Directly after application of the polystyrene pads, most horses appear to be much more comfortable and willing to stand and even bear weight on the affected hooves. Questions arising from this approach include: a) whether the density of the polystyrene pads is sufficient, and b) what happens to the load distribution between the polystyrene and the hoof wall over a period of time due to the compression of the polystyrene pads.

In the previous study done on cadaver limbs it was shown that the polystyrene padding and reverse shoe combination does have an influence on the load distribution between the hoof wall and the solar surface of the hoof. Further research was necessary to investigate the effect of different densities and different thicknesses of polystyrene padding on the load distribution between the solar surface and the

hoof wall and also to determine the extent of compression of the polystyrene over a period of time and the effect thereof on the load distribution.

The aim of this study was threefold. Firstly, to investigate the effect of the reverse shoe and different densities of polystyrene used as solar support on the load distribution on the front hooves of live horses, secondly, to investigate the effect of the reverse shoe and different thicknesses of polystyrene solar pads on the load distribution on the front hooves of live horses, and thirdly, to measure the effect of the compression of the polystyrene over time on the load distribution. Polystyrene with densities of 32kg/m^3 , 24kg/m^3 and 16kg/m^3 were used in the study. The wedging of all the polystyrene pads used in this study was 50%. The thicknesses of each set of polystyrene pads with different densities, were 100mm and 60mm respectively. The load carried by the hoof wall and the solar area was measured separately using two load cells and a purpose-designed solar plate.

5.2 MATERIALS AND METHODS

Three Thoroughbred horses were used in this study. These horses were from the group of animals that belong to the Equine Research Centre, Faculty of Veterinary Science, Onderstepoort and had no history of laminitis, lameness or any other abnormalities in the front limbs, or radiographical pathology. The horses chosen had number 0 or 1 shoe sizes in order to simplify the measurements.

5.2.1 Experimental Design

For the purpose of this study, three horses were used and, therefore, a total of six front limbs. The bodyweight of each horse and the shoe size of each front limb were recorded (Table 5). A total of six different treatments were performed on each front limb (Table 6). The order in which the three horses were tested, as well as the order in which the six treatments were done on each horse, were randomised.

Horse	Bodyweight (kg)	Shoe Size
A	556	Left = 1 Right = 1
B	573	Left = 1 Right = 0
C	524	Left = 0 Right = 0

Table 4: Bodyweight and shoe sizes of the six limbs, as recorded for the three horses used in this study.

Treatment No.	Polystyrene Density (kg/m ³)	Polystyrene Thickness (mm)
1	24	100
2	24	60
3	16	60
4	32	100
5	32	60
6	16	100

Table 5: Description of the different treatments used in this study. The different densities of the polystyrene pads were 32kg/m³, 24kg/m³ and 16kg/m³ and the two different thicknesses 100mm and 60mm.

The computer system for the data collection consisted of two calibrated load cells (Route, Rulp 5 ton, serial number 11716, Load Cell Services, 1 ton, serial number 29560), amplifier (HBN Signal Conditioner, Germany), a portable data recording unit (Diagnostic Instrument, FFT Analyser, Model: PL202), a modified horse shoe and a solar plate. One load cell measured the total load applied by the

system to the front limb and a second cell measured the load exerted on the polystyrene pad. The load cells were buried in the ground to ensure that the horse would stand on a surface level with the ground when standing on the cells (Figure 15).



Figure 15: Load cells were buried in a hole, with only the modified shoe and the solar plate visible above the ground. The horse stood on a level surface when one of its limbs was on the test apparatus.

For each limb, the polystyrene as indicated in Table 6, with a wedge of 50%, was prepared. The front hooves of the three horses were trimmed to a point of latero-medial and toe-heel balance. No dorsal hoof wall removal was performed during the *in vivo* study. A number 0 or 1 reverse shoe was applied to each hoof and the body mass of the horse was recorded.

In the beginning of the experiments, reference data were recorded for both front limbs of each of the three horses respectively. For the reference data, the limbs were shod with reverse shoes, but no polystyrene pads were applied to the soles. The horse stepped with one limb onto the load cells. An assistant lifted the other front limb off the ground. When the horse was standing comfortably, data recording started. The assistant put the foot down and the limb from which data were recorded was

lifted and put down onto the load cell again. The other limb was lifted again. Three sets of data were recorded. Recording time was 4 seconds with a frequency of 50Hz. The average of these data was taken as the reading for the specific measurement. The horse stepped off the load cells and reference data for the other limb were recorded. After the reference data were recorded, the first of the polystyrene pads was applied to the hoof according to the randomised order as described earlier. The horse then stepped onto the load cells again and the whole procedure was repeated. After data recording, another polystyrene pad was applied to the other hoof and data were recorded for that limb. Between the next measurements, the horse was walked for 5 minute periods on a concrete surface to compress the polystyrene. A total of 5 measurements was recorded for each limb: 1) reference data, 2) directly after applying pads, 3) 5 minutes, 4) 10 minutes and 5) 15 minutes after walking on a concrete surface. The polystyrene pad was changed according to the randomised order and the whole experimental procedure was repeated for the new set of polystyrene pads. This procedure was followed until all six the different treatments had been applied. The same experimental procedure was repeated for the other two horses according to the randomised order.

5.2.2 Data Analysis

Only the loads from the two load cells for the different treatments per limb were recorded. The data were downloaded to a computer and data analysis was done with the aid of Matlab (Appendix C) and Sigmaplot Computer Programmes.

Statistical evaluation of the data was done with the aid of computer software (SigmaStat Statistical Software, Jandel Scientific Software). The effects on loads at the four time intervals were investigated using a Two-Way Repeated Measures Analysis of Variance (ANOVA). Tukey's Test for Pairwise Multiple Comparison Procedures was used to investigate differences between specific treatments

(Appendix E). For all the statistical interpretations, significance was set at $p < 0.05$.

5.3 RESULTS

Figure 16 shows a comparison of the load-bearing over time of the polystyrene pads with a thickness of 60mm and densities of 16kg/m^3 , 24kg/m^3 and 32kg/m^3 , respectively. All three different pads had high initial load values that decreased as time increased. Significant differences were found between treatments for time intervals 0, 5 and 10 minutes, but after 15 minutes, no significant differences could be found between the different pads.

The comparison of the load-bearing over time for three polystyrene pads with a thickness of 100mm and densities of 16kg/m^3 , 24kg/m^3 and 32kg/m^3 , respectively is shown in Figure 17. For the thickness of 100mm, no significant differences could be found between the treatments for the four different time periods.

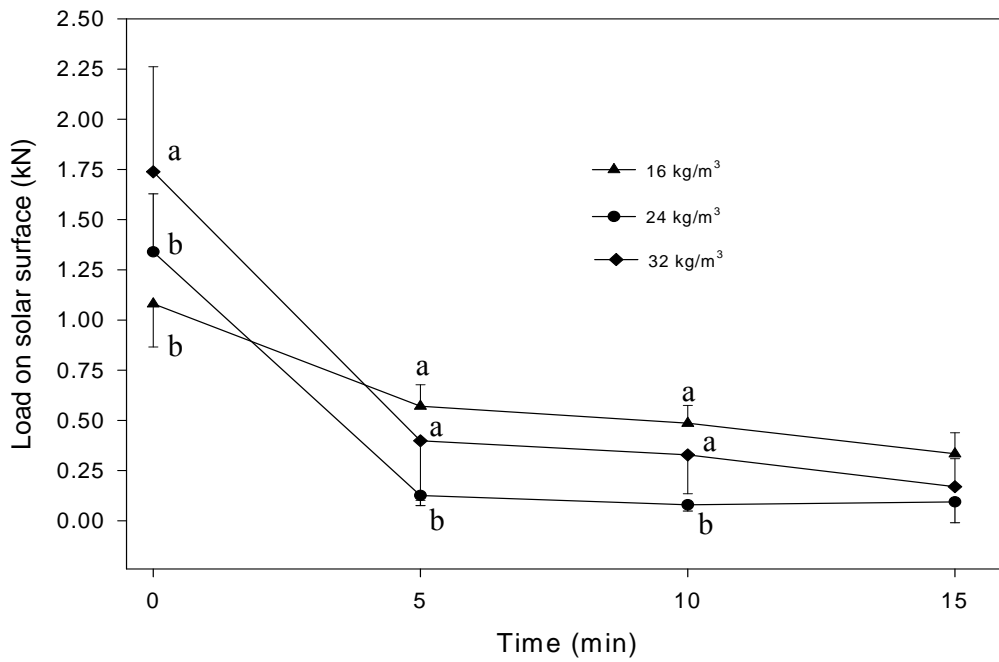


Figure 16: Load on the solar surface for polystyrene pads with different densities (24 kg/m³, σ 16kg/m³ and υ 32kg/m³) and the same thickness of 60mm. Mean values of time indicated by different letters, are significantly different.

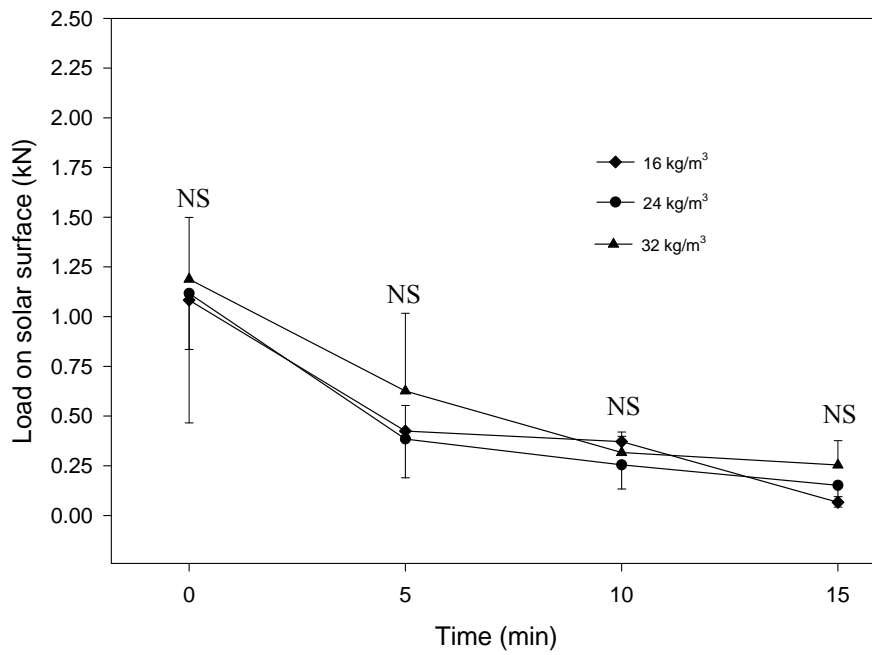


Figure 17: Load on the solar surface for polystyrene pads with different densities (λ 24 kg/m³, σ 16kg/m³ and τ 32kg/m³) and the same thickness of 100mm. NS: No significant difference.

5.4 DISCUSSION

From the previous study in Chapter 4, it was clear that polystyrene padding does have a significant influence on the load borne by the solar surface and the hoof wall when the hoof is shod with a reverse shoe and polystyrene padding is applied to the sole. The effect of polystyrene with different thicknesses and different densities on the load borne by the solar surface needed to be investigated. Figures 16 indicates that the $32\text{kg/m}^3 \times 60\text{mm}$ polystyrene pad bore a significantly higher load during the initial recording. There were no significant differences between the other treatments at this point. After 5- and 10- minute periods, the loads borne by the solar area for the $16\text{kg/m}^3 \times 60\text{mm}$ and the $32\text{kg/m}^3 \times 60\text{mm}$ pads were significantly higher than that for the $24\text{kg/m}^3 \times 60\text{mm}$ pad. Whilst significant differences were observed between the load born by the polystyrene pads of different densities during the first 10 minutes after application, no significant differences were present at 15 minutes after application. As no trend was discernible between the different densities of polystyrene during the compression phase, the mechanism determining these observed differences could not be determined.

When the effect of polystyrene with a thickness of 100mm and densities of 32kg/m^3 , 24kg/m^3 and 16kg/m^3 on the load distribution on the solar surface were investigated, as presented in Figure 17, no significant differences could be found between any of the treatments. The same tendency as for the 60mm thickness polystyrene was observed, in that the initial load was high and then faded down in a hyperbolic curve. The loads borne by the polystyrene pads with a thickness of 100mm, were lower than for those of 60mm. This is the complete opposite of what was expected, but it was found that after compression, some of the 100mm thick polystyrene curled underneath the reverse shoe, thus causing a partial loss of solar support and solar load-bearing. The excess polystyrene underneath the shoe was removed to ensure proper fitting of the reverse shoe onto the modified shoe of the recording apparatus.

Due to the sensitivity of the laminitic hoof, the working time on the hoof had to be limited. It is therefore not recommended that the polystyrene with a thickness of 100mm be used in the treatment of laminitis. The protrusion of the excess amount of polystyrene underneath the shoe may cause instability of the hoof and may therefore cause further damage to the compromised lamellae.

For the initial 10 minutes, the $32\text{kg/m}^3 \times 60\text{mm}$ and $16\text{kg/m}^3 \times 60\text{mm}$ pads bore the most solar load. After 15 minutes, there was no difference in the load-bearing between the treatments. It will be necessary to investigate the long-term effect of all three solar pads on the solar load-bearing. The 15-minute period was too short. The long-term effect of all three pads on the solar blood flow also needs to be investigated. Walking on the pad might also have an effect on the efficiency of the solar pads.

5.5 CONCLUSION

In order to obtain the best solar support with a polystyrene pad, it was necessary to investigate the effect of different densities and thicknesses of polystyrene. It is important to note that the results gained from this study are only valid for a horse with a bodyweight of approximately 551kg.

It was not very clear from the results of this study which type of polystyrene will provide the best solar support. All the solar pads showed a hyperbolic tendency in which the initial load was high and then was reduced with time. From the observations made during the experimental procedure, the 32kg/m³ x 60mm pad compressed to a more dense and rigid end-product than the 16kg/m³ x 60mm pad which correlates with the modulus of elasticity of the material used in the study. The residue elasticity of the 16kg/m³ x 60mm pad may be a positive property for reducing compression on the blood flow underneath P3. This can be compared to a person walking in shoes with soft soles as opposed to ones with harder soles. It was concluded that polystyrene pads with densities of 32kg/m³, 24kg/m³ and 16kg/m³ and thicknesses of 100mm and 60mm would prove similar support for the remainder of the period that they were applied follow a variable compression phase of less than 15 minutes. Further research need to be done to investigate the effect of the polystyrene pad on the solar surface for a longer period.

The 100mm thick polystyrene pads were very uncomfortable for the horse. The thickness and the wedging of 50% raised the heels very high and could cause further damage to the affected lamellae as the horse was actually standing on its toes for the first few seconds, until the polystyrene was significantly compressed. The polystyrene that protruded underneath the reverse shoe also constituted waste of useful material. Polystyrene pads of 100mm thick are therefore not recommended for treatment of laminitis.

CHAPTER 6

GENERAL CONCLUSIONS

The following conclusions were drawn from this study:

1. The reverse shoe applied together with polystyrene padding does have an effect on the biomechanics of the hoof of a normal horse.
2. The polystyrene pad causes a load shift in the normal hoof. The load on the hoof wall was relieved and a greater load was borne by the solar surface after the application of the solar pad.
3. From the *in vitro* study it became clear that the polystyrene-padded solar area carried most of the load applied to the hoof.
4. The pressure-sensitive film indicated that the palmar half of the solar surface carried a greater load than the dorsal half of the solar surface, when a polystyrene pad was applied to the hoof. The load-bearing at the dorsal half of the hoof wall was decreased which could minimise further tissue damage. The pressure concentration on the palmar half of the sole could minimise the negative effect on the blood supply.
5. By using polystyrene as a solar pad, P3 is stabilised and further rotation of P3 may be minimised.
6. No suggestions can be made about the optimum wedging of the polystyrene pad to give the optimum solar support.

7. The characteristics of the polystyrene make it a very useful material for solar padding. Its compressibility, without becoming rigid, may minimise the possibility of solar necrosis.
8. The polystyrene also deforms to fill the whole of the solar surface, thereby enlarging the weight-bearing surface.
9. Use of the reverse shoe, together with polystyrene pads and partial dorsal hoof wall removal, promises to be a very useful treatment for laminitic cases.
10. The $16\text{kg/m}^3 \times 60\text{mm}$ pads remained more elastic than any of the others after a time period of 15 minutes, due to their lower modulus of compression. This characteristic may be beneficial, as care needs to be taken to prevent further injury of the blood vessels.
11. Polystyrene with a thickness of 100mm is not suitable for use in solar pads as it is uncomfortable for the horse, and too much of the polystyrene curls underneath the reverse shoe.
12. The reverse shoe and polystyrene combination as a treatment for laminitis is an improvement on the reverse even frog pressure technique and the adjustable heart-bar shoe, because the pressure distribution is more even over the solar surface and is not concentrated on the frog as is the case with the other two treatments.
13. The reverse shoe does not have to be replaced as often as the heart-bar shoe and therefore less damage is caused to the hoof wall due to replacement of the shoe.

14. The use of polystyrene as a solar pad is more advantageous than other padding materials, as it is easy to change the polystyrene pad without removing the shoe.

15. Polystyrene solar pads are very economical.

CHAPTER 7

FURTHER RECOMMEDATIONS.

The following research projects are all suggested for further study in the refinement of the use of the reverse shoe and polystyrene pad on laminitic horses.

Engineering research

- 1) Designing a computerised model of the hoof and simulating the effect of the reverse shoe and polystyrene padding on this model.
- 2) The computer programme may be applied to investigate the effect of dorsal hoof wall removal on the biomechanics of the hoof wall, and the role of the reverse shoe and polystyrene padding on the hoof biomechanics.
- 3) More research needs to be done on laminitic cases. The procedures described in this dissertation can be applied to laminitic hooves and the results compared with the results obtained in this study.
- 4) Research needs to be done on a technique to measure the movement of P3 in relation to the hoof wall in laminitic cases after the application of the reverse shoe and the polystyrene padding.
- 5) The effect of the polystyrene needs to be investigated over a longer period of time. This will give a better indication of the “life time” of the polystyrene pad in order to be the most effective.

- 6) The optimum thickness of the 16kg/m^3 polystyrene pad for a horse with a body mass of 551kg needs to be investigated.
- 7) The optimum density and thickness of polystyrene pads for horses with different body weights need to be ascertained.
- 8) Research must be done to find material more suitable than polystyrene for use as solar pads.

Veterinary Research

- 1) The effect of the reverse shoe and polystyrene pads on the blood-flow to the solar surface of the hoof.
- 2) The effect of using a polystyrene pad on the total solar surface, without shoeing the horse with acute and chronic laminitis.
- 3) The positioning of the reverse shoe in relation to the distal dorsal tip of P3.

Farriery

- 1) Using polystyrene pads in conjunction with glue-on or other types of corrective shoeing.
- 2) The correct application of the reverse shoe to the hoof in order to ascertain the maximum support.

BIBLIOGRAPHY

=====

1. Balch O, Butler D, White K, Metcalf S 1995 Hoof balance and lameness: Improper toe length, hoof angle, and mediolateral balance. *Compendium on Continuing Education* 17: 1275-1283
2. Balch O, White K, Butler D 1991 Factors involved in the balancing of equine hooves. *Journal of the American Veterinary Medical Association* 198: 1980-1989
3. Barrey E 1990 Investigation of the vertical hoof force distribution in the equine forelimb with an instrumented horseboot. *Equine Veterinary Journal* Suppl 9: 35-38
4. Bartel D L, Schryver H F, Lowe J E, Parker R A 1978 Locomotion in the horse: A procedure for computing the internal forces in the digit. *American Journal of Veterinary Research* 39: 1721-1727
5. Baxter G M 1996 Diagnosing and treating acute laminitis. *Veterinary Medicine* 91: 940-952
6. Baxter G M 1992 Equine laminitis. *Equine Practice* 14: 13-22
7. Butler, J A, Colles, C M, Dyson, S J, Kold, S E, and Poulos, P W 1993 *Clinical Radiology of the Horse* Blackwell Scientific Publications, London
8. Chapman B 1996 The most frequently asked questions and answers about laminitis and founder. *American Farriers Journal* 22: 42-46
9. Chapman B, Platt G W 1985 Laminitis. *Proceedings of the 31st Annual Convention of the American Association of Equine Practitioners*. 99-116

10. Colahan P, Leach D, Muir G 1991 Center of pressure location of the hoof with and without hoof wedges. In Persson S G B, Lindholm A, Jeffcott L B (eds) *Equine Exercise Physiology 3*. ICEEP Publications, Davis, California: 113-119
11. Colahan P, Lindsey E, Nunier C 1993 Determination of the center of pressure of the **hooves** of the forelimbs of horses standing on a flat level surface. *Acta Anatomica* 146: 175-178
12. Colles C M 1986 Diseases and injuries of the horse's foot. In Hickman J (ed) *Equine Surgery and Medicine Vol 2*. Academic Press, London, UK: 185-223
13. Colles C M 1989 A technique for assessing hoof function in the horse. *Equine Veterinary Journal* 21: 17-22
14. Colles C M 1991 Laminitis Research. *Equine Veterinary Journal* 23: 237-238
15. Cripps P J, Eustace R A 1999 Radiological measurements from the feet of normal horses with relevance to laminitis. *Equine Veterinary Journal* 31: 427-432
16. Curtis S, Ferguson D W, Luikart R, Ovnicek G 1999 Trimming and shoeing the cronicly affected horse. *Veterinary Clinics of North America: Equine Practice* 15: 463-480
17. Douglas J E, Mittal C, Thomason J J, Jofriet J C 1996 The modulus of elasticity of equine hoof wall: implications for the mechanical function of the hoof. *The Journal of Experimental Biology* 199: 1829-1836
18. Eastman T G, Honnas C M, Hague B A, Moyer W, von der Rosen H D 1999 Deep digital flexor tenotomy as a treatment for chronic laminitis in horses: 35 cases (1988 – 1997). *Journal of the American Veterinary Medical Association* 214: 517- 519

19. Eustace R A 1990 Equine laminitis. *In Practice* 156-161
20. Eustace R A 1992 *Explaining Laminitis and its Prevention*. J W Arrowsmith Ltd, Bristol
21. Eustace R A 1993 Equine Laminitis. In Boden E (eds) *Equine Practice*. Bailliere Tindall, London: 149-164
22. Eustace R A, Caldwell M N 1989 The construction of the heart bar shoe and the technique of dorsal wall resection. *Equine Veterinary Journal* 21: 367-369
23. Eustace R A, Caldwell M N 1989 Treatment of solar prolapse using the heart bar shoe and dorsal hoof wall resection technique. *Equine Veterinary Journal* 21: 370-372
24. Frederick F H, Henderson J M 1970 Impact force measurement using preloaded transducers. *American Journal of Veterinary Research* 31: 2279-2283
25. Goetz T E 1987 Anatomic, hoof, and shoeing considerations for the treatment of laminitis in horses. *Journal of the American Veterinary Medical Association* 190: 1323-1332
26. Goetz T E 1987 Dorsal hoof-wall removal for the treatment of laminitis. *American Farriers Journal* 50-64
27. Goetz T E 1989 The treatment of laminitis in horses. *Veterinary Clinics of North America: Equine Practice* 5: 73-108
28. Goetz T E, Comstock C M 1985 The use of adjustable heart bar shoes in the treatment of laminitis in horses. *Proceedings of the 31st Annual Convention of the American Association of Equine Practitioners* 605-616
29. Hood D M, Beckham A S, Chaffin M K, Hunter J F, Mathews N S, Moyer W, Slater M R 1995

Comparison of phenylbutazone, lily pads, and trimming on expressed pain in horses with chronic laminitis. *Proceedings of the 41th Annual Convention of the American Association of Equine Practitioners* 248-250



30. Hood D M, Grosenbaugh D A, Slater M R 1994 Vascular perfusion in horses with chronic laminitis. *Equine Veterinary Journal* 26: 191-196
31. Hunt R J 1991 The pathophysiology of acute laminitis. *Compendium on Continuing Education for the Practicing Veterinarian* 13: 1003-1011
32. Hunt R J 1993 A retrospective evaluation of laminitis in horses. *Equine Veterinary Journal* 25: 61-64
33. Hunt R J 1996 Diagnosing and treating chronic laminitis in horses. *Veterinary Medicine* 91: 1025-1032
34. Kasapi M A, Gosline J M 1996 Strain-rate-dependent mechanical properties of the equine hoof wall. *The Journal of Experimental Biology* 199: 1133-1146
35. Le Roux, J M W and Smuts, M M S 1986 *Anatomie van die Huisdiere - 'n Studie en Disseksiegids* Promedia Publikasies, Pretoria
36. Leach D 1984 Biomechanical considerations in raising and lowering the heel. *Proceedings of the 29th Annual Convention of the American Association of Equine Practitioners* 333-342
37. Moore J N, Allen D 1996 The pathophysiology of acute laminitis. *Veterinary Medicine* 91: 936-939
38. Moore J N, Allen D, Clark E S 1991 Pathophysiology of acute laminitis. *Equine Practice* 13: 29-32

39. Moyer W, Redden R R 1989 Chronic and severe laminitis: a critique of therapy with heart bar shoes and hoof wall resection. *Equine Veterinary Journal* 21: 317-318
40. O'Brien T R, Baker T W 1987 Distal extremity examination: How to perform the radiographic examination and interpret the radiographs. *Proceedings of the 32nd Annual Convention of the American Association of Equine Practitioners* 553-570
41. O'Grady S E 1992 Treating acute laminitis. *Equine Veterinary Data* 13: 124-126
42. Olivier A 1992 The effect of the reverse even frog pressure shoe on hoof wall compression and third phalanx displacement in the horse - an *in vitro* study. M.Med.Vet.(Chir), Faculty of Veterinary Science, University of Pretoria
43. Ovnicek G D, Page B T, Trotter G W 2003 Natural balance trimming and shoeing: its theory and application. *Veterinary Clinics: Equine Practice* 19: 353-377
44. Page B T, Bowker R M, Ovnicek G D, Hagen T L, 1999 How to mark the foot for radiography. *Proceedings of the 45th Annual Convention of the American Association of Equine Practitioners* 148-150
45. Parks A H 2003 Treatment of acute laminitis. *Equine Veterinary Education* 15: 273-280
46. Peremans K, Verschooten F, De Moor A, Desmet P 1991 Laminitis in the pony: conservative treatment vs dorsal hoof wall resection. *Equine Veterinary Journal* 23: 243-246
47. Pollitt C 1998 An overview of laminitis. *Proceedings of the 30th Annual Congress of the Equine Practitioners Group of the South African Veterinary Association* 55-59
48. Pollitt C C 1996 Basement membrane pathology: a feature of acute equine laminitis. *Equine Veterinary Journal* 28: 38-46

49. Pollitt C C 1996 The basement membrane at the equine hoof dermal epidermal junction. *Equine Veterinary Journal* 26: 399-407
50. Pollitt C C 1999 Equine Laminitis: A Revised Pathophysiology. *Proceedings of the 45th Annual Convention of the American Association of Equine Practitioners* 188-192
51. Prinz L 1996 Arresting laminitis. *Equus* 228: 47-53
52. Redden R F 1986 Hoof wall resection as a treatment in laminitis. *Proceedings of the 32th Annual Convention of the American Association of Equine Practitioners* 647-656
53. Redden R F 1988 Complicated laminitis. *Proceedings of the 34th Annual Convention of the American Association of Equine Practitioners* 311-319
54. Redden R F 1992 18° elevation of the heel as an aid to treating acute and chronic laminitis in the equine. *Proceedings of the 38th Annual Convention of the American Association of Equine Practitioners* 375-379
55. Redden R F 2003 Radiographic imaging of the equine foot. *Veterinary Clinics: Equine Practice* 19: 379-392
56. Reddy J N 1984 *An introduction to the finite element method* McGraw-Hill Book Company, New York
57. Sigafos R 1994 New management approaches to laminitis. *Equine Veterinary Data* 15: 135-135
58. Skog W J, Reinertson E L 1985 Theory and application of the Chapman heartbar horseshoe for laminitis. *Iowa State University Veterinarian* 47: 90-97
59. Sloet van Oldruitenborgh-Oosterbaan M M 1999 Laminitis in the horse: a review. *Veterinary*

60. Stashak T S 1987 Lameness. *Adam's Lameness in Horses*. Lea and Febiger, Philadelphia: 486-499
61. Thomason J J, Biewener A A, Bertram J E A 1992 Surface strain on the equine hoof wall *in vivo*: Implications for the material design and functional morphology of the wall. *Journal of Experimental Biology* 166: 145-168
62. Van den Berg S S 1997 Recent developments in the therapy of equine laminitis. *Equine Practitioners Group Short Course* 29: 24-32
63. Weiss D J 1997 Equine laminitis: a review of recent research. *Equine Practice* 19: 16-20
64. White N A, Baggett N 1983 A method of corrective shoeing for laminitis in horses. *Veterinary Medicine and Small Animal Clinician* 775-778
65. Wilson J H, Turner T A 1991 Medical management of laminitis. *Equine Veterinary Data* 12: 219-220
66. Yelle M 1986 Clinicians guide to equine laminitis. *Equine Veterinary Journal* 18: 156-158

APPENDIX A : FIGURES ILLUSTRATING THE COMPRESSIVE STRENGTH OF POLYSTYRENE SUPPLIED BY THE MANUFACTURER

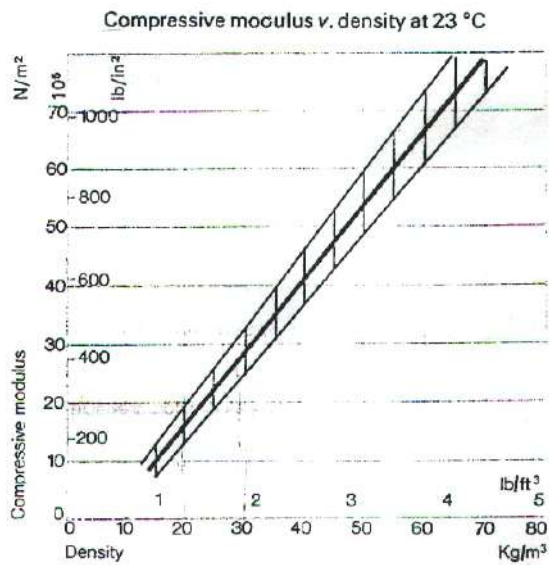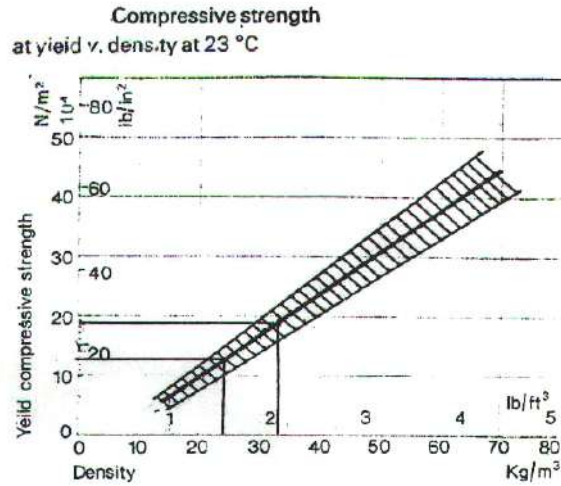




APPENDIX B : STANDARD CONTINUOUS PRESSURE CHART AND GRAPH OF TEMPERATURE AND HUMIDITY CONDITIONS USED FOR THE ANALYSIS OF THE DATA OF THE PRESSURE FILMS

Ultra Super Low Film

STANDARD MOMENTARY PRESSURE CHART

Measurement pressure range: 0.2–0.6 MPa
• Pressure application conditions
Time to reach the pressure to be measured: 5 sec.
Time of retention at the pressure to be measured: 5 sec.


Check if the temperature and humidity meet with the conditions above when the pressure is applied.
(For example, if the room temperature is 25°C and the humidity factor is 60%RH, acquire the pressure from the C curve in the standard chart.)



STANDARD COLOR SAMPLE



As the pressure range indicated by the broken line in the graph may exceed the permissible error range, it should be used for reference purposes only.

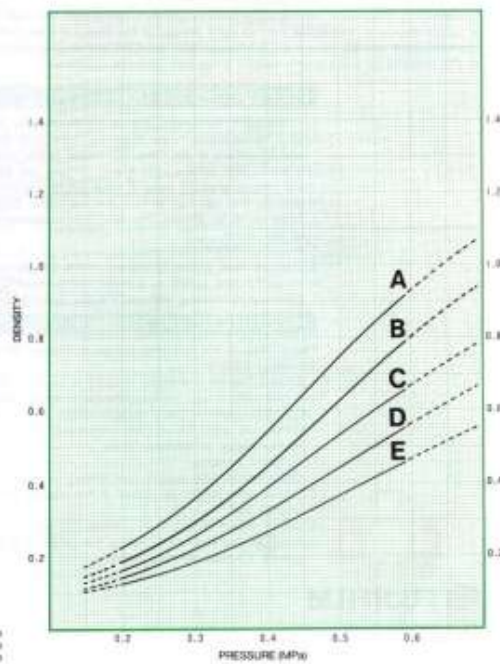



Super Low Film

STANDARD MOMENTARY PRESSURE CHART


Measurement pressure range: 0.5–2.5MPa

• Pressure application conditions


Time to reach the pressure to be measured: 5 sec.

Time of retention at the pressure to be measured: 5 sec.


Check if the temperature and humidity meet with the conditions above when the pressure is applied.
(For example, if the room temperature is 25°C and the humidity factor is 60%RH, acquire the pressure from the B curve in the standard chart.)

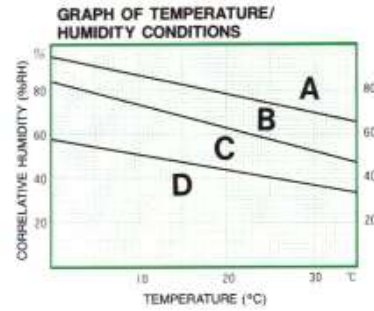

STANDARD COLOR SAMPLE

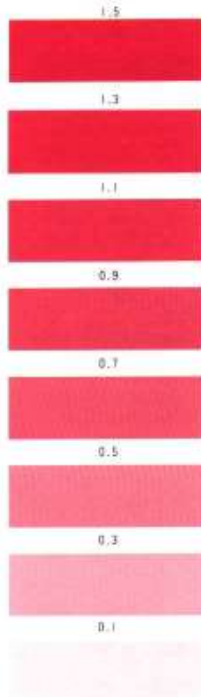

As the pressure range indicated by the broken line in the graph may exceed the permissible error range, it should be used for reference purposes only.

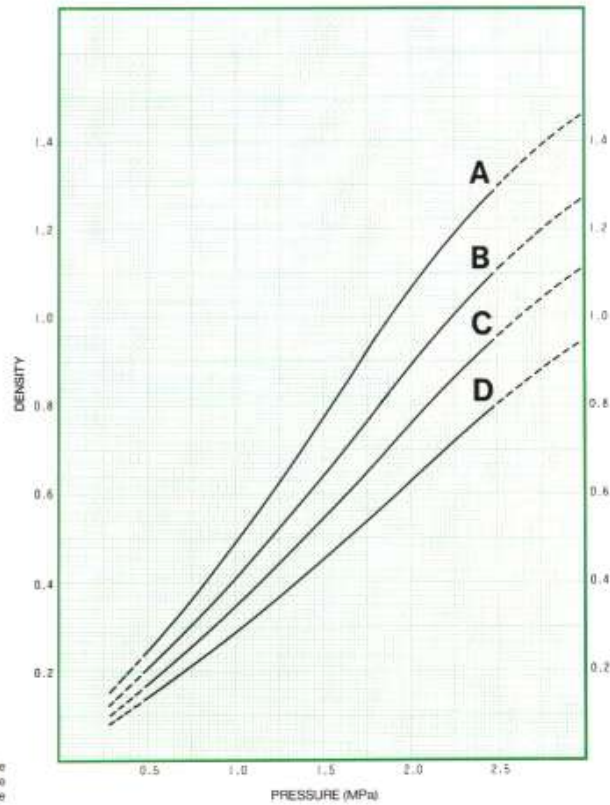

APPENDIX C : OUTLINE OF COMPUTER PROGRAMME

```

clear all
close all

% This program calculate the load-bearing of the polystyrene and the
% total hoof respectively. Channel a is the total load and b is the
% load carried by the polystyrene.
% L = Left fore limb, R = Right fore limb.

% Henning Mostert
% Equine Research Centre Onderstepoort. 26/9/2000

%Total Load
%Left fore

load tst66a.txt
lip66a=tst66a(1:length(tst66a)-1,:);
save lip66a lip66a
lip66acl(:,1)=lip66a(:,1)*(-100*9.81);
% Data multiplied with the calibration factor for the load cell. 20V = 5t
% with multiplication factor of 0.5)
lip66acf = filt(lip66acl,'L',5,63);
save lip66acf lip66acf
t=time(lip66acf,67);
lip66pol = polyfit(t,lip66acf(:,1),2);
% Calculate the polynomial function for the specific data;
save lip66pol lip66pol;
lip66fig = polyval(lip66pol,t);
% Create a plot with the specified polymere coefficients;

% 2nd data recording of same test

load tst67a.txt
lip67a=tst67a(1:length(tst67a)-1,:);
save lip67a lip67a;
lip67acl(:,1)=lip67a(:,1)*(-100*9.81);
lip67acf = filt(lip67acl,'L',5,63);
save lip67acf lip67acf;
t=time(lip67acf,67);
lip67pol = polyfit(t,lip67acf(:,1),2);
save lip67pol lip67pol;
lip67fig = polyval(lip67pol,t);

% 3rd data recording of same test

load tst68a.txt
lip68a=tst68a(1:length(tst68a)-1,:);

```



```
save lip68a lip68a;
lip68acl(:,1)=lip68a(:,1)*(-100*9.81);
lip68acf = filt(lip68acl,'L',5,63);
save lip68acf lip68acf;
t=time(lip68acf,67);
lip68pol = polyfit(t,lip68acf(:,1),2);
save lip68pol lip68pol;
lip68fig = polyval(lip68pol,t);

% Create a graft for the data;

plot(t,[lip66acf(:,1),lip67acf(:,1),lip68acf(:,1)]),title('Horse B 24/100 Polys.
Total'),xlabel('Time(sec)'),ylabel('N')
pause
plot(t,[lip66fig,lip67fig,lip68fig]),title('Horse B 24/100 Polys. Total : Curve
fit.'),xlabel('Time(sec)'),ylabel('N')

pause

lip66acfmean=mean(lip66acf(:,1));
lip67acfmean=mean(lip67acf(:,1));
lip68acfmean=mean(lip68acf(:,1));
lip66figmean=mean(lip66fig(:,1));
lip67figmean=mean(lip67fig(:,1));
lip68figmean=mean(lip68fig(:,1));

% Calculate the mean for all three sets of data and the curve fit;

lip12lamean = (lip66acfmean+lip67acfmean+lip68acfmean)/3
pause
lip12lpmean = (lip66figmean+lip67figmean+lip68figmean)/3
pause

clear lip66a lip66acl lip66acf
clear lip67a lip67acl lip67acf
clear lip68a lip68acl lip68acf

pause

%Load carried by polystyrene

%Left Fore

load tst66b.txt
lip66b=tst66b(1:length(tst66b)-1,:);
save lip66b lip66b
lip66bel(:,1)=lip66b(:,1)*(-250/2)*9.81;
% Data multiplied with the calibration factor for the load cell. 20V = 5t with multiplication factor of
0.5)
```

```

lip66bcf = filt(lip66bcl,'L',5,63);
save lip66bcf lip66bcf
t=time(lip66bcf,67);
% Calculate poli24/100mal cuve fitting;
lip66bpo = polyfit(t,lip66bcf(:,1),2);
save lip66bpo lip66bpo;
% Apply calculated polynomial function to data;
lip66bfi = polyval(lip66bpo,t);
%plot(t,(lip66bcf(:,1))),title('lipgo 24/100 Polys. Total'),xlabel('Time(sec)'),ylabel('N')

% 2nd data recording of same test

load tst67b.txt
lip67b=tst67b(1:length(tst67b)-1,:);
save lip67b lip67b;
lip67bcl(:,1)=lip67b(:,1)*(-250/2)*9.81;
% Data multiplied with the calibration factor for the load cell. 20V = 5t with multification factor of
0.5)
lip67bcf = filt(lip67bcl,'L',5,63);
save lip67bcf lip67bcf;
t=time(lip67bcf,67);
lip67bpo = polyfit(t,lip67bcf(:,1),2);
save lip67bpo lip67bpo;
lip67bfi = polyval(lip67bpo,t);
%plot(t,(lip67bcf(:,1))),title('lipgo 24/100 Polys. Total'),xlabel('Time(sec)'),ylabel('N')

% 3nd data recording of same test

load tst68b.txt
lip68b=tst68b(1:length(tst68b)-1,:);
save lip68b lip68b;
lip68bcl(:,1)=lip68b(:,1)*(-250/2)*9.81;
% Dbta multiplied with the calibration factor for the load cell. 20V = 5t with multification factor of
0.5)
lip68bcf = filt(lip68bcl,'L',5,63);
save lip68bcf lip68bcf;
t=time(lip68bcf,67);
lip68bpo = polyfit(t,lip68bcf(:,1),2);
save lip68bpo lip68bpo;
lip68bfi = polyval(lip68bpo,t);
plot(t,[lip66bcf(:,1),lip67bcf(:,1),lip68bcf(:,1)]),title('Horse B 24/100 Polys. Solar
surface'),xlabel('Time(sec)'),ylabel('N')
pause
plot(t,[lip66bfi,lip67bfi,lip68bfi]),title('Horse B 24/100 Polys. Solar surface : Curve
Fitting'),xlabel('Time(sec)'),ylabel('N')

pause

lip66bcfmean=mean(lip66bcf(:,1));

```



```

lip67bcfmean=mean(lip67bcf(:,1));
lip68bcfmean=mean(lip68bcf(:,1));

lip12lbmean = (lip66bcfmean+lip67bcfmean+lip68bcfmean)/3

clear lip66b lip66bcl lip66bcf
clear lip67b lip67bcl lip67bcf
clear lip68b lip68bcl lip68bcf

pause

% Total load

% Right Fore

load tst63a.txt
lip63a=tst63a(1:length(tst63a)-1,:);
save lip63a lip63a;
lip63acl(:,1)=lip63a(:,1)*(-100*9.81);
lip63acf = filt(lip63acl,'L',5,63);
save lip63acf lip63acf;
t=time(lip63acf,67);
lip63pol = polyfit(t,lip63acf(:,1),2);
save lip63pol lip63pol;
lip63fig = polyval(lip63pol,t);

% 2nd data recording of same test

load tst64a.txt
lip64a=tst64a(1:length(tst64a)-1,:);
save lip64a lip64a;
lip64acl(:,1)=lip64a(:,1)*(-100*9.81);
lip64acf = filt(lip64acl,'L',5,63);
save lip64acf lip64acf;
t=time(lip64acf,67);
lip64pol = polyfit(t,lip64acf(:,1),2);
save lip64pol lip64pol;
lip64fig = polyval(lip64pol,t);

% 3rd data recording of same test

load tst65a.txt
lip65a=tst65a(1:length(tst65a)-1,:);
save lip65a lip65a;
lip65acl(:,1)=lip65a(:,1)*(-100*9.81);
lip65acf = filt(lip65acl,'L',5,63);
save lip65acf lip65acf;
t=time(lip65acf,67);

```

```

lip65pol = polyfit(t,lip65acf(:,1),2);
save lip65pol lip65pol;
lip65fig = polyval(lip65pol,t);
plot(t,[lip63acf(:,1),lip64acf(:,1),lip65acf(:,1)]),title('Horse B 24/100 Polys. Total-Right'),xlabel('Time(sec)'),ylabel('N')
pause
plot(t,[lip63fig,lip64fig,lip65fig]),title('Horse B 24/100 Polys. Total-Right: Curve Fitting'),xlabel('Time(sec)'),ylabel('N')

pause

lip63acfmean=mean(lip63acf(:,1));
lip64acfmean=mean(lip64acf(:,1));
lip65acfmean=mean(lip65acf(:,1));

lip12ramean = (lip63acfmean+lip64acfmean+lip65acfmean)/3

clear lip63a lip63acl lip63acf
clear lip64a lip64acl lip64acf
clear lip65a lip65acl lip65acf

pause

% Solar Surface

% Right Fore

load tst63b.txt
lip63b=tst63b(1:length(tst63b)-1,:);
save lip63b lip63b;
lip63bcl(:,1)=lip63b(:,1)*(-250/2)*9.81;
lip63bcf = filt(lip63bcl,'L',5,63);
save lip63bcf lip63bcf;
t=time(lip63bcf,67);
lip63bpo = polyfit(t,lip63bcf(:,1),2);
save lip63bpo lip63bpo;
lip63bf = polyval(lip63bpo,t);

% 2nd data recording of same test

load tst64b.txt
lip64b=tst64b(1:length(tst64b)-1,:);
save lip64b lip64b;
lip64bcl(:,1)=lip64b(:,1)*(-250/2)*9.81;
lip64bcf = filt(lip64bcl,'L',5,63);
save lip64bcf lip64bcf;
t=time(lip64bcf,67);
lip64bpo = polyfit(t,lip64bcf(:,1),2);
save lip64bpo lip64bpo;

```

```

lip64bfi = polyval(lip64bpo,t);

% 3nd data recording of same test

load tst65b.txt
lip65b=tst65b(1:length(tst65b)-1,:);
save lip65b lip65b;
lip65bcl(:,1)=lip65b(:,1)*(-250/2)*9.81;
lip65bcf = filt(lip65bcl,'L',5,63);
save lip65bcf lip65bcf;
t=time(lip65bcf,67);
lip65bpo = polyfit(t,lip65bcf(:,1),2);
save lip65bpo lip65bpo;
lip65bfi = polyval(lip65bpo,t);
plot(t,[lip64bcf(:,1),lip65bcf(:,1)]),title('Horse B 24/100 Polys. Right : Solar
Pad'),xlabel('Time(sec)'),ylabel('N')
pause
%plot(t,[lip64bfi,lip65bfi]),title('Horse B 24/100 Polys. Right : Solar Pad : Curve
fit'),xlabel('Time(sec)'),ylabel('N')

pause

lip63bcfmean=mean(lip63bcf(:,1));
lip64bcfmean=mean(lip64bcf(:,1));
lip65bcfmean=mean(lip65bcf(:,1));

lip12rbmean = (lip63bcfmean+lip64bcfmean+lip65bcfmean)/3

clear lip63b lip63bcl lip63bcf
clear lip64b lip64bcl lip64bcf
clear lip65b lip65bcl lip65bcf

close all
clear all

```

APPENDIX D : STATISTICAL RESULTS OF THE *IN VITRO* STUDY

One Way Repeated Measures Analysis of Variance Thursday, November 30, 2000, 16:43:11

Data source: Treatment and Load borne by polystyrene

Normality Test: Passed (P = 0.122)

Equal Variance Test: Passed (P = 0.655)

Treatment Name	N	Missing	Mean	Std Dev	SEM
1.000	6	0	1.768	1.463	0.597
2.000	6	0	79.498	10.901	4.450
3.000	6	0	76.838	8.433	3.443
4.000	6	0	82.715	8.730	3.564

Source of Variation	DF	SS	MS	F	P
Between Subjects	5	825.003	165.001		
Between Treatments	3	27422.668	9140.889	265.466	<0.001
Residual	15	516.500	34.433		
Total	23	28764.170			

The differences in the mean values among the treatment groups are greater than would be expected by chance; there is a statistically significant difference (P = <0.001). To isolate the group or groups that differ from the others use a multiple comparison procedure.

Power of performed test with alpha = 0.050: 1.000

All Pairwise Multiple Comparison Procedures (Tukey Test):

Comparisons for factor: **treatment**

Comparison	Diff of Means	p	q	P	P<0.050
4.000 vs. 1.000	80.947	4	33.790	<0.001	Yes
4.000 vs. 3.000	5.877	4	2.453	0.341	No
4.000 vs. 2.000	3.217	4	1.343	0.779	Do Not Test
2.000 vs. 1.000	77.730	4	32.447	<0.001	Yes
2.000 vs. 3.000	2.660	4	1.110	0.860	Do Not Test
3.000 vs. 1.000	75.070	4	31.337	<0.001	Yes

A result of "Do Not Test" occurs for a comparison when no significant difference is found between two means that enclose that comparison. For example, if you had four means sorted in order, and found no difference between means 4 vs. 2, then you would not test 4 vs. 3 and 3 vs. 2, but still test 4 vs. 1 and 3 vs. 1 (4 vs. 3 and 3 vs. 2 are enclosed by 4 vs. 2: 4 3 2 1). Note that not testing the enclosed means is a procedural rule, and a result of Do Not Test should be treated as if there is no significant difference between the means, even though one may appear to exist.

One Way Repeated Measures Analysis of Variance Thursday, November 30, 2000, 16:44:09

Data source: Treatment and total load measured

Normality Test: Passed (P = 0.116)

Equal Variance Test: Passed (P = 0.656)

Treatment Name	N	Missing	Mean	Std Dev	SEM
1.000	6	0	98.215	1.460	0.596
2.000	6	0	20.502	10.901	4.450
3.000	6	0	23.160	8.434	3.443
4.000	6	0	17.285	8.730	3.564

Source of Variation	DF	SS	MS	F	P
Between Subjects	5	825.861	165.172		
Between Treatments	3	27411.314	9137.105	265.768	<0.001
Residual	15	515.700	34.380		
Total	23	28752.875			

The differences in the mean values among the treatment groups are greater than would be expected by chance; there is a statistically significant difference (P = <0.001). To isolate the group or groups that differ from the others use a multiple comparison procedure.

Power of performed test with alpha = 0.050: 1.000

All Pairwise Multiple Comparison Procedures (Tukey Test):

Comparisons for factor: **treatment**

Comparison	Diff of Means	p	q	P	P<0.050
1.000 vs. 4.000	80.930	4	33.809	<0.001	Yes
1.000 vs. 2.000	77.713	4	32.465	<0.001	Yes
1.000 vs. 3.000	75.055	4	31.355	<0.001	Yes
3.000 vs. 4.000	5.875	4	2.454	0.341	No
3.000 vs. 2.000	2.658	4	1.111	0.860	Do Not Test
2.000 vs. 4.000	3.217	4	1.344	0.779	Do Not Test

A result of "Do Not Test" occurs for a comparison when no significant difference is found between two means that enclose that comparison. For example, if you had four means sorted in order, and found no difference between means 4 vs. 2, then you would not test 4 vs. 3 and 3 vs. 2, but still test 4 vs. 1 and 3 vs. 1 (4 vs. 3 and 3 vs. 2 are enclosed by 4 vs. 2: 4 3 2 1). Note that not testing the enclosed means is a procedural rule, and a result of Do Not Test should be treated as if there is no significant difference between the means, even though one may appear to exist.



Two Way Analysis of Variance

Monday, October 16, 2000, 16:15:01

Data source: Data 1 in Notebook

General Linear Model (No Interactions)

Dependent Variable: Load

Normality Test: Passed ($P > 0.200$)

Equal Variance Test: Passed ($P = 1.000$)

Source of Variation	DF	SS	MS	F	P
treatment	2	0.00000000167	0.000000000833	0.00000000166	1.000
quadrant	3	37.488	12.496	24.938	<0.001
Residual	6	3.006	0.501		
Total	11	40.494	3.681		

The difference in the mean values among the different levels of treatment is not great enough to exclude the possibility that the difference is just due to random sampling variability after allowing for the effects of differences in quadrant. There is not a statistically significant difference ($P = 1.000$).

The difference in the mean values among the different levels of quadrant is greater than would be expected by chance after allowing for effects of differences in treatment. There is a statistically significant difference ($P = <0.001$). To isolate which group(s) differ from the others use a multiple comparison procedure.

Power of performed test with $\alpha = 0.0500$: for treatment : 0.0502

Power of performed test with $\alpha = 0.0500$: for quadrant : 0.999

Least square means for treatment :

Group Mean

1.000 25.000

2.000 25.000

3.000 25.000

Std Err of LS Mean = 0.354

Least square means for quadrant :

Group Mean

4.000 23.308

3.000 23.160

2.000 26.712

1.000 26.821

Std Err of LS Mean = 0.409

All Pairwise Multiple Comparison Procedures (Tukey Test):

Comparisons for factor: **treatment**

Comparison	Diff of Means	p	q	P	P<0.050
2.000 vs. 3.000	0.0000250	3	0.0000706	1.000	No
2.000 vs. 1.000	0.0000250	3	0.0000706	1.000	Do Not Test
1.000 vs. 3.000	3.553E-015	3	1.004E-014	1.000	Do Not Test

Comparisons for factor: **quadrant**

Comparison	Diff of Means	p	q	P	P<0.050
1.000 vs. 3.000	3.661	4	8.959	0.003	Yes
1.000 vs. 4.000	3.513	4	8.596	0.004	Yes
1.000 vs. 2.000	0.109	4	0.267	0.997	No
2.000 vs. 3.000	3.552	4	8.691	0.004	Yes
2.000 vs. 4.000	3.404	4	8.329	0.004	Yes
4.000 vs. 3.000	0.148	4	0.363	0.994	No

A result of "Do Not Test" occurs for a comparison when no significant difference is found between two means that enclose that comparison. For example, if you had four means sorted in order, and found no difference between means 4 vs. 2, then you would not test 4 vs. 3 and 3 vs. 2, but still test 4 vs. 1 and 3 vs. 1 (4 vs. 3 and 3 vs. 2 are enclosed by 4 vs. 2: 4 3 2 1). Note that not testing the enclosed means is a procedural rule, and a result of Do Not Test should be treated as if there is no significant difference between the means, even though one may appear to exist.

APPENDIX E : STATISTICAL RESULTS OF THE *IN VIVO* STUDY

Two Way Repeated Measures ANOVA (Two Factor Repetition) Wednesday, November 29, 2000, 11:35:42

Data source: Data 1 in Notebook

General Linear Model

Dependent Variable: LOADB

Normality Test: Failed (P = <0.001)

Equal Variance Test: Failed (P = 0.003)

Source of Variation	DF	SS	MS	F	P
limb	5	2.279	0.456	3.728	0.023
treatm	5	1.174	0.235	8.637	<0.001
treatm x limb	25	0.680	0.0272		
time	3	25.721	8.574	69.491	<0.001
time x limb	15	1.867	0.124		
treatm x time	15	2.423	0.162	5.583	<0.001
Residual	72	2.083	0.0289		
Total	140	36.267	0.259		

The difference in the mean values among the different levels of treatm is greater than would be expected by chance after allowing for effects of differences in time. There is a statistically significant difference (P = <0.001). To isolate which group(s) differ from the others use a multiple comparison procedure.

The difference in the mean values among the different levels of time is greater than would be expected by chance after allowing for effects of differences in treatm. There is a statistically significant difference (P = <0.001). To isolate which group(s) differ from the others use a multiple comparison procedure.

The effect of different levels of treatm depends on what level of time is present. There is a statistically significant interaction between treatm and time. (P = <0.001)

Power of performed test with alpha = 0.0500: for treatm : 0.997

Power of performed test with alpha = 0.0500: for time : 1.000

Power of performed test with alpha = 0.0500: for treatm x time : 1.000

Expected Mean Squares:

Approximate DF Residual for treatm = 25.287

Approximate DF Residual for time = 15.081

Approximate DF Residual for limb = 14.064

Expected MS(treatm) = var(res) + 3.859 var(treatm x limb) + var(treatm)

Expected MS(time) = var(res) + 5.733 var(time x limb) + var(time)

Expected MS(limb) = var(res) + 3.847 var(treatm x limb) + 5.770 var(time x limb) + 23.081 var(limb)

Expected MS(treatm x limb) = var(res) + 3.880 var(treatm x limb)

Expected MS(treatm x time) = var(res) + var(treatm x time)

Expected MS(time x limb) = var(res) + 5.800 var(time x limb)

Expected MS(Residual) = var(res)

Least square means for treatm :

Group	Mean	SEM
1.000	0.477	0.0337
2.000	0.414	0.0377
3.000	0.618	0.0337
4.000	0.597	0.0337
5.000	0.659	0.0337
6.000	0.445	0.0337

Least square means for time :

Group	Mean	SEM
0.000	1.259	0.0588
5.000	0.422	0.0588
10.000	0.279	0.0626
15.000	0.180	0.0604

Least square means for treatm x time :

Group	Mean	SEM
1.000 x 0.000	1.117	0.0694
1.000 x 5.000	0.385	0.0694
1.000 x 10.000	0.255	0.0694
1.000 x 15.000	0.152	0.0694
2.000 x 0.000	1.339	0.0694
2.000 x 5.000	0.126	0.0694
2.000 x 10.000	0.0857	0.0934
2.000 x 15.000	0.104	0.0799
3.000 x 0.000	1.081	0.0694
3.000 x 5.000	0.571	0.0694
3.000 x 10.000	0.486	0.0694
3.000 x 15.000	0.334	0.0694
4.000 x 0.000	1.189	0.0694
4.000 x 5.000	0.627	0.0694
4.000 x 10.000	0.317	0.0694
4.000 x 15.000	0.254	0.0694
5.000 x 0.000	1.738	0.0694
5.000 x 5.000	0.398	0.0694
5.000 x 10.000	0.328	0.0694
5.000 x 15.000	0.170	0.0694

6.000 x 0.000	1.088	0.0694
6.000 x 5.000	0.425	0.0694
6.000 x 10.000	0.202	0.0694
6.000 x 15.000	0.0668	0.0694

All Pairwise Multiple Comparison Procedures (Tukey Test):

Comparisons for factor: **treatm**

Comparison	Diff of Means	p	q	P	P<0.050
5.000 vs. 2.000	0.245	6	6.856	<0.001	Yes
5.000 vs. 6.000	0.213	6	6.334	0.002	Yes
5.000 vs. 1.000	0.182	6	5.395	0.009	Yes
5.000 vs. 4.000	0.0621	6	1.846	0.779	No
5.000 vs. 3.000	0.0409	6	1.215	0.953	Do Not Test
3.000 vs. 2.000	0.204	6	5.712	0.005	Yes
3.000 vs. 6.000	0.172	6	5.119	0.015	Yes
3.000 vs. 1.000	0.141	6	4.180	0.066	No
3.000 vs. 4.000	0.0212	6	0.631	0.998	Do Not Test
4.000 vs. 2.000	0.183	6	5.118	0.015	Yes
4.000 vs. 6.000	0.151	6	4.488	0.041	Yes
4.000 vs. 1.000	0.119	6	3.549	0.159	Do Not Test
1.000 vs. 2.000	0.0635	6	1.777	0.805	No
1.000 vs. 6.000	0.0316	6	0.939	0.984	Do Not Test
6.000 vs. 2.000	0.0319	6	0.893	0.988	Do Not Test

Comparisons for factor: **time**

Comparison	Diff of Means	p	q	P	P<0.050
0.000 vs. 15.000	1.078	4	18.096	<0.001	Yes
0.000 vs. 10.000	0.980	4	16.127	<0.001	Yes
0.000 vs. 5.000	0.837	4	14.228	<0.001	Yes
5.000 vs. 15.000	0.242	4	4.056	0.051	No
5.000 vs. 10.000	0.143	4	2.355	0.375	Do Not Test
10.000 vs. 15.000	0.0986	4	1.603	0.675	Do Not Test

Comparisons for factor: **time within 1**

Comparison	Diff of Means	p	q	P	P<0.05
0.000 vs. 15.000	0.964	4	11.085	<0.001	Yes
0.000 vs. 10.000	0.862	4	9.906	<0.001	Yes
0.000 vs. 5.000	0.732	4	8.414	<0.001	Yes
5.000 vs. 15.000	0.232	4	2.672	0.245	No
5.000 vs. 10.000	0.130	4	1.492	0.718	Do Not Test
10.000 vs. 15.000	0.103	4	1.180	0.838	Do Not Test

Comparisons for factor: **time within 2**



Comparison	Diff of Means	p	q	P	P<0.05
0.000 vs. 10.000	1.253	4	12.154	<0.001	Yes
0.000 vs. 15.000	1.235	4	13.169	<0.001	Yes
0.000 vs. 5.000	1.213	4	13.945	<0.001	Yes
5.000 vs. 10.000	0.0400	4	0.388	0.993	No
5.000 vs. 15.000	0.0218	4	0.232	0.998	Do Not Test
15.000 vs. 10.000	0.0182	4	0.167	0.999	Do Not Test

Comparisons for factor: **time within 3**

Comparison	Diff of Means	p	q	P	P<0.05
0.000 vs. 15.000	0.747	4	8.586	<0.001	Yes
0.000 vs. 10.000	0.595	4	6.836	<0.001	Yes
0.000 vs. 5.000	0.510	4	5.859	<0.001	Yes
5.000 vs. 15.000	0.237	4	2.726	0.229	No
5.000 vs. 10.000	0.0849	4	0.977	0.900	Do Not Test
10.000 vs. 15.000	0.152	4	1.750	0.606	Do Not Test

Comparisons for factor: **time within 4**

Comparison	Diff of Means	p	q	P	P<0.05
0.000 vs. 15.000	0.934	4	10.741	<0.001	Yes
0.000 vs. 10.000	0.872	4	10.021	<0.001	Yes
0.000 vs. 5.000	0.562	4	6.460	<0.001	Yes
5.000 vs. 15.000	0.372	4	4.281	0.019	Yes
5.000 vs. 10.000	0.310	4	3.562	0.069	No
10.000 vs. 15.000	0.0626	4	0.719	0.957	No

Comparisons for factor: **time within 5**

Comparison	Diff of Means	p	q	P	P<0.05
0.000 vs. 15.000	1.568	4	18.029	<0.001	Yes
0.000 vs. 10.000	1.410	4	16.214	<0.001	Yes
0.000 vs. 5.000	1.340	4	15.404	<0.001	Yes
5.000 vs. 15.000	0.228	4	2.625	0.259	No
5.000 vs. 10.000	0.0705	4	0.810	0.940	Do Not Test
10.000 vs. 15.000	0.158	4	1.814	0.578	Do Not Test

Comparisons for factor: **time within 6**

Comparison	Diff of Means	p	q	P	P<0.05
0.000 vs. 15.000	1.021	4	11.743	<0.001	Yes
0.000 vs. 10.000	0.887	4	10.193	<0.001	Yes
0.000 vs. 5.000	0.663	4	7.625	<0.001	Yes
5.000 vs. 15.000	0.358	4	4.117	0.026	Yes
5.000 vs. 10.000	0.223	4	2.568	0.277	No
10.000 vs. 15.000	0.135	4	1.550	0.694	No

Comparisons for factor: **treatm within 0**

Comparison	Diff of Means	p	q	P	P<0.05
5.000 vs. 3.000	0.658	6	9.548	<0.001	Yes
5.000 vs. 6.000	0.650	6	9.434	<0.001	Yes
5.000 vs. 1.000	0.622	6	9.025	<0.001	Yes



5.000 vs. 4.000	0.550	6	7.980	<0.001	Yes
5.000 vs. 2.000	0.400	6	5.799	0.001	Yes
2.000 vs. 3.000	0.258	6	3.748	0.095	No
2.000 vs. 6.000	0.250	6	3.635	0.115	Do Not Test
2.000 vs. 1.000	0.222	6	3.225	0.212	Do Not Test
2.000 vs. 4.000	0.150	6	2.181	0.638	Do Not Test
4.000 vs. 3.000	0.108	6	1.567	0.877	Do Not Test
4.000 vs. 6.000	0.100	6	1.454	0.907	Do Not Test
4.000 vs. 1.000	0.0720	6	1.045	0.977	Do Not Test
1.000 vs. 3.000	0.0360	6	0.523	0.999	Do Not Test
1.000 vs. 6.000	0.0282	6	0.410	1.000	Do Not Test
6.000 vs. 3.000	0.00780	6	0.113	1.000	Do Not Test

Comparisons for factor: **treatm within 5**

Comparison	Diff of Means	p	q	P	P<0.05
4.000 vs. 2.000	0.501	6	7.270	<0.001	Yes
4.000 vs. 1.000	0.242	6	3.512	0.139	No
4.000 vs. 5.000	0.228	6	3.313	0.188	Do Not Test
4.000 vs. 6.000	0.202	6	2.926	0.312	Do Not Test
4.000 vs. 3.000	0.0557	6	0.809	0.993	Do Not Test
3.000 vs. 2.000	0.445	6	6.461	<0.001	Yes
3.000 vs. 1.000	0.186	6	2.703	0.402	Do Not Test
3.000 vs. 5.000	0.173	6	2.504	0.489	Do Not Test
3.000 vs. 6.000	0.146	6	2.117	0.667	Do Not Test
6.000 vs. 2.000	0.299	6	4.344	0.032	Yes
6.000 vs. 1.000	0.0404	6	0.586	0.998	Do Not Test
6.000 vs. 5.000	0.0267	6	0.387	1.000	Do Not Test
5.000 vs. 2.000	0.273	6	3.957	0.066	No
5.000 vs. 1.000	0.0137	6	0.199	1.000	Do Not Test
1.000 vs. 2.000	0.259	6	3.758	0.094	Do Not Test

Comparisons for factor: **treatm within 10**

Comparison	Diff of Means	p	q	P	P<0.05
3.000 vs. 2.000	0.400	6	4.901	0.010	Yes
3.000 vs. 6.000	0.284	6	4.126	0.049	Yes
3.000 vs. 1.000	0.231	6	3.354	0.177	No
3.000 vs. 4.000	0.169	6	2.455	0.512	Do Not Test
3.000 vs. 5.000	0.158	6	2.294	0.586	Do Not Test
5.000 vs. 2.000	0.242	6	2.965	0.298	No
5.000 vs. 6.000	0.126	6	1.832	0.787	Do Not Test
5.000 vs. 1.000	0.0730	6	1.059	0.975	Do Not Test
5.000 vs. 4.000	0.0111	6	0.161	1.000	Do Not Test
4.000 vs. 2.000	0.231	6	2.829	0.350	Do Not Test
4.000 vs. 6.000	0.115	6	1.671	0.845	Do Not Test
4.000 vs. 1.000	0.0619	6	0.899	0.988	Do Not Test
1.000 vs. 2.000	0.169	6	2.071	0.687	Do Not Test
1.000 vs. 6.000	0.0532	6	0.772	0.994	Do Not Test
6.000 vs. 2.000	0.116	6	1.419	0.916	Do Not Test


Comparisons for factor: **treatm within 15**

Comparison	Diff of Means	p	q	P	P<0.05
3.000 vs. 6.000	0.267	6	3.873	0.077	No
3.000 vs. 2.000	0.230	6	3.093	0.253	Do Not Test
3.000 vs. 1.000	0.181	6	2.634	0.432	Do Not Test
3.000 vs. 5.000	0.164	6	2.376	0.548	Do Not Test
3.000 vs. 4.000	0.0795	6	1.154	0.964	Do Not Test
4.000 vs. 6.000	0.187	6	2.719	0.395	Do Not Test
4.000 vs. 2.000	0.150	6	2.023	0.709	Do Not Test
4.000 vs. 1.000	0.102	6	1.480	0.901	Do Not Test
4.000 vs. 5.000	0.0842	6	1.222	0.954	Do Not Test
5.000 vs. 6.000	0.103	6	1.497	0.896	Do Not Test
5.000 vs. 2.000	0.0660	6	0.889	0.989	Do Not Test
5.000 vs. 1.000	0.0178	6	0.258	1.000	Do Not Test
1.000 vs. 6.000	0.0854	6	1.239	0.951	Do Not Test
1.000 vs. 2.000	0.0483	6	0.650	0.997	Do Not Test
2.000 vs. 6.000	0.0371	6	0.500	0.999	Do Not Test

A result of "Do Not Test" occurs for a comparison when no significant difference is found between two means that enclose that comparison. For example, if you had four means sorted in order, and found no difference between means 4 vs. 2, then you would not test 4 vs. 3 and 3 vs. 2, but still test 4 vs. 1 and 3 vs. 1 (4 vs. 3 and 3 vs. 2 are enclosed by 4 vs. 2: 4 3 2 1). Note that not testing the enclosed means is a procedural rule, and a result of Do Not Test should be treated as if there is no significant difference between the means, even though one may appear to exist.

APPENDIX F : SAMPLES OF DATA MEASURED IN THIS STUDY

Pressure film:

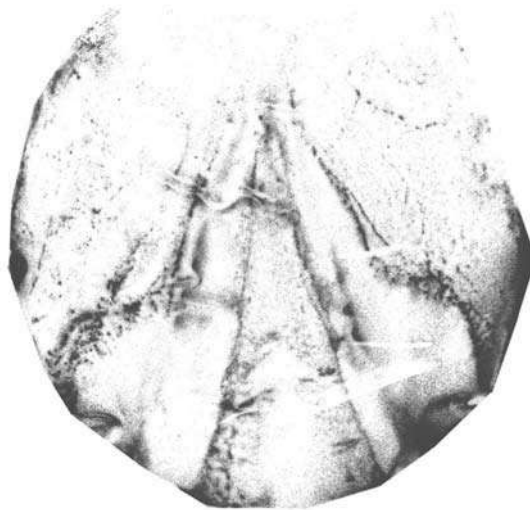

Load cell measurements (in Voltage)

All the load cell data for the polystyrene pad and the total load were used. No data were rejected. The computer program in appendix C was used to calculate the loads from the data presented underneath.

The data shown is for the measurement of one, four second data recording, for the total load applied to the hoof, of horse A for no polystyrene pad applied to the hoof, during the *in vivo* study. Due to the amount of data measured, it is not possible to show all the data in the appendix.

Voltage	Time interval
-2.7881710e+000	0.0000000e+000
-2.8272350e+000	1.5625000e-002
-2.7979370e+000	3.1250000e-002
-2.8125860e+000	4.6875000e-002
-2.7979370e+000	6.2500000e-002
-2.8077030e+000	7.8125000e-002
-2.8125860e+000	9.3750000e-002
-2.8125860e+000	1.0937500e-001
-2.8321180e+000	1.2500000e-001
-2.8321180e+000	1.4062500e-001
-2.8418840e+000	1.5625000e-001
-2.8223520e+000	1.7187500e-001
-2.8272350e+000	1.8750000e-001
-2.8125860e+000	2.0312500e-001
-2.8174690e+000	2.1875000e-001
-2.8321180e+000	2.3437500e-001
-2.8467670e+000	2.5000000e-001
-2.8565320e+000	2.6562500e-001
-2.8370010e+000	2.8125000e-001
-2.8370010e+000	2.9687500e-001
-2.8321180e+000	3.1250000e-001
-2.8418840e+000	3.2812500e-001
-2.8467670e+000	3.4375000e-001
-2.8565320e+000	3.5937500e-001
-2.8662980e+000	3.7500000e-001
-2.8565320e+000	3.9062500e-001
-2.8662980e+000	4.0625000e-001
-2.8418840e+000	4.2187500e-001
-2.8418840e+000	4.3750000e-001
-2.8272350e+000	4.5312500e-001
-2.8272350e+000	4.6875000e-001
-2.8272350e+000	4.8437500e-001
-2.8223520e+000	5.0000000e-001
-2.8272350e+000	5.1562500e-001
-2.8077030e+000	5.3125000e-001
-2.8174690e+000	5.4687500e-001
-2.8125860e+000	5.6250000e-001
-2.8174690e+000	5.7812500e-001
-2.8174690e+000	5.9375000e-001
-2.8272350e+000	6.0937500e-001
-2.8321180e+000	6.2500000e-001
-2.8223520e+000	6.4062500e-001
-2.8321180e+000	6.5625000e-001
-2.8174690e+000	6.7187500e-001
-2.8272350e+000	6.8750000e-001
-2.8125860e+000	7.0312500e-001
-2.8272350e+000	7.1875000e-001



-2.8321180e+000 7.3437500e-001
-2.8321180e+000 7.5000000e-001
-2.8370010e+000 7.6562500e-001
-2.8272350e+000 7.8125000e-001
-2.8467670e+000 7.9687500e-001
-2.8467670e+000 8.1250000e-001
-2.8614150e+000 8.2812500e-001
-2.8662980e+000 8.4375000e-001
-2.8760640e+000 8.5937500e-001
-2.8907130e+000 8.7500000e-001
-2.8907130e+000 8.9062500e-001
-2.9004790e+000 9.0625000e-001
-2.8955960e+000 9.2187500e-001
-2.9053620e+000 9.3750000e-001
-2.9053620e+000 9.5312500e-001
-2.9053620e+000 9.6875000e-001
-2.9102450e+000 9.8437500e-001
-2.9004790e+000 1.0000000e+000
-2.8955960e+000 1.0156250e+000
-2.8760640e+000 1.0312500e+000
-2.8858300e+000 1.0468750e+000
-2.8711810e+000 1.0625000e+000
-2.8662980e+000 1.0781250e+000
-2.8662980e+000 1.0937500e+000
-2.8614150e+000 1.1093750e+000
-2.8662980e+000 1.1250000e+000
-2.8614150e+000 1.1406250e+000
-2.8614150e+000 1.1562500e+000
-2.8614150e+000 1.1718750e+000
-2.8662980e+000 1.1875000e+000
-2.8565320e+000 1.2031250e+000
-2.8711810e+000 1.2187500e+000
-2.8760640e+000 1.2343750e+000
-2.8760640e+000 1.2500000e+000
-2.8809470e+000 1.2656250e+000
-2.8711810e+000 1.2812500e+000
-2.8809470e+000 1.2968750e+000
-2.8711810e+000 1.3125000e+000
-2.8760640e+000 1.3281250e+000
-2.8662980e+000 1.3437500e+000
-2.8662980e+000 1.3593750e+000
-2.8711810e+000 1.3750000e+000
-2.8614150e+000 1.3906250e+000
-2.8662980e+000 1.4062500e+000
-2.8565320e+000 1.4218750e+000
-2.8711810e+000 1.4375000e+000
-2.8565320e+000 1.4531250e+000
-2.8662980e+000 1.4687500e+000
-2.8760640e+000 1.4843750e+000
-2.8711810e+000 1.5000000e+000
-2.8711810e+000 1.5156250e+000
-2.8614150e+000 1.5312500e+000
-2.8711810e+000 1.5468750e+000
-2.8614150e+000 1.5625000e+000
-2.8711810e+000 1.5781250e+000
-2.8614150e+000 1.5937500e+000
-2.8662980e+000 1.6093750e+000
-2.8760640e+000 1.6250000e+000
-2.8614150e+000 1.6406250e+000



-2.8662980e+000 1.6562500e+000
-2.8516500e+000 1.6718750e+000
-2.8614150e+000 1.6875000e+000
-2.8467670e+000 1.7031250e+000
-2.8662980e+000 1.7187500e+000
-2.8614150e+000 1.7343750e+000
-2.8614150e+000 1.7500000e+000
-2.8565320e+000 1.7656250e+000
-2.8418840e+000 1.7812500e+000
-2.8467670e+000 1.7968750e+000
-2.8370010e+000 1.8125000e+000
-2.8418840e+000 1.8281250e+000
-2.8321180e+000 1.8437500e+000
-2.8418840e+000 1.8593750e+000
-2.8516500e+000 1.8750000e+000
-2.8418840e+000 1.8906250e+000
-2.8516500e+000 1.9062500e+000
-2.8467670e+000 1.9218750e+000
-2.8516500e+000 1.9375000e+000
-2.8467670e+000 1.9531250e+000
-2.8516500e+000 1.9687500e+000
-2.8516500e+000 1.9843750e+000
-2.8467670e+000 2.0000000e+000
-2.8516500e+000 2.0156250e+000
-2.8418840e+000 2.0312500e+000
-2.8516500e+000 2.0468750e+000
-2.8370010e+000 2.0625000e+000
-2.8467670e+000 2.0781250e+000
-2.8370010e+000 2.0937500e+000
-2.8418840e+000 2.1093750e+000
-2.8516500e+000 2.1250000e+000
-2.8467670e+000 2.1406250e+000
-2.8467670e+000 2.1562500e+000
-2.8321180e+000 2.1718750e+000
-2.8467670e+000 2.1875000e+000
-2.8370010e+000 2.2031250e+000
-2.8614150e+000 2.2187500e+000
-2.8565320e+000 2.2343750e+000
-2.8516500e+000 2.2500000e+000
-2.8565320e+000 2.2656250e+000
-2.8467670e+000 2.2812500e+000
-2.8516500e+000 2.2968750e+000
-2.8370010e+000 2.3125000e+000
-2.8370010e+000 2.3281250e+000
-2.8321180e+000 2.3437500e+000
-2.8418840e+000 2.3593750e+000
-2.8418840e+000 2.3750000e+000
-2.8321180e+000 2.3906250e+000
-2.8370010e+000 2.4062500e+000
-2.8321180e+000 2.4218750e+000
-2.8418840e+000 2.4375000e+000
-2.8321180e+000 2.4531250e+000
-2.8467670e+000 2.4687500e+000
-2.8370010e+000 2.4843750e+000
-2.8370010e+000 2.5000000e+000
-2.8418840e+000 2.5156250e+000
-2.8370010e+000 2.5312500e+000
-2.8467670e+000 2.5468750e+000
-2.8321180e+000 2.5625000e+000



-2.8418840e+000 2.5781250e+000
-2.8321180e+000 2.5937500e+000
-2.8370010e+000 2.6093750e+000
-2.8516500e+000 2.6250000e+000
-2.8418840e+000 2.6406250e+000
-2.8418840e+000 2.6562500e+000
-2.8321180e+000 2.6718750e+000
-2.8418840e+000 2.6875000e+000
-2.8272350e+000 2.7031250e+000
-2.8370010e+000 2.7187500e+000
-2.8321180e+000 2.7343750e+000
-2.8321180e+000 2.7500000e+000
-2.8370010e+000 2.7656250e+000
-2.8321180e+000 2.7812500e+000
-2.8418840e+000 2.7968750e+000
-2.8321180e+000 2.8125000e+000
-2.8467670e+000 2.8281250e+000
-2.8467670e+000 2.8437500e+000
-2.8711810e+000 2.8593750e+000
-2.8955960e+000 2.8750000e+000
-2.9248940e+000 2.8906250e+000
-2.9639580e+000 2.9062500e+000
-2.9786070e+000 2.9218750e+000
-3.0030210e+000 2.9375000e+000
-3.0079040e+000 2.9531250e+000
-3.0323190e+000 2.9687500e+000
-3.0372020e+000 2.9843750e+000
-3.0567340e+000 3.0000000e+000
-3.0665000e+000 3.0156250e+000
-3.0567340e+000 3.0312500e+000
-3.0469680e+000 3.0468750e+000
-3.0079040e+000 3.0625000e+000
-2.9786070e+000 3.0781250e+000
-2.9297770e+000 3.0937500e+000
-2.9053620e+000 3.1093750e+000
-2.8662980e+000 3.1250000e+000
-2.8370010e+000 3.1406250e+000
-2.8174690e+000 3.1562500e+000
-2.8028200e+000 3.1718750e+000
-2.8125860e+000 3.1875000e+000
-2.8125860e+000 3.2031250e+000
-2.8565320e+000 3.2187500e+000
-2.8809470e+000 3.2343750e+000
-2.9200110e+000 3.2500000e+000
-2.9590750e+000 3.2656250e+000
-2.9883720e+000 3.2812500e+000
-3.0176700e+000 3.2968750e+000
-3.0127870e+000 3.3125000e+000
-3.0323190e+000 3.3281250e+000
-3.0176700e+000 3.3437500e+000
-3.0127870e+000 3.3593750e+000
-2.9834890e+000 3.3750000e+000
-2.9541920e+000 3.3906250e+000
-2.9248940e+000 3.4062500e+000
-2.8809470e+000 3.4218750e+000
-2.8370010e+000 3.4375000e+000
-2.7588730e+000 3.4531250e+000
-2.7149270e+000 3.4687500e+000
-2.6758630e+000 3.4843750e+000



-2.6563310e+000 3.5000000e+000
-2.6416820e+000 3.5156250e+000
-2.6270330e+000 3.5312500e+000
-2.6221500e+000 3.5468750e+000
-2.6026180e+000 3.5625000e+000
-2.6221500e+000 3.5781250e+000
-2.6319160e+000 3.5937500e+000
-2.6563310e+000 3.6093750e+000
-2.6660970e+000 3.6250000e+000
-2.6856290e+000 3.6406250e+000
-2.7100440e+000 3.6562500e+000
-2.7100440e+000 3.6718750e+000
-2.7344580e+000 3.6875000e+000
-2.7198100e+000 3.7031250e+000
-2.7295750e+000 3.7187500e+000
-2.7246930e+000 3.7343750e+000
-2.7344580e+000 3.7500000e+000
-2.7491070e+000 3.7656250e+000
-2.7637560e+000 3.7812500e+000
-2.7735220e+000 3.7968750e+000
-2.7930540e+000 3.8125000e+000
-2.8418840e+000 3.8281250e+000
-2.8662980e+000 3.8437500e+000
-2.8955960e+000 3.8593750e+000
-2.9102450e+000 3.8750000e+000
-2.9248940e+000 3.8906250e+000
-2.9297770e+000 3.9062500e+000
-2.9200110e+000 3.9218750e+000
-2.9151280e+000 3.9375000e+000
-2.8858300e+000 3.9531250e+000
-2.8711810e+000 3.9687500e+000
-2.8321180e+000 3.9843750e+000