



Application: Door Seal



Zoomed view of 4 sensor elements

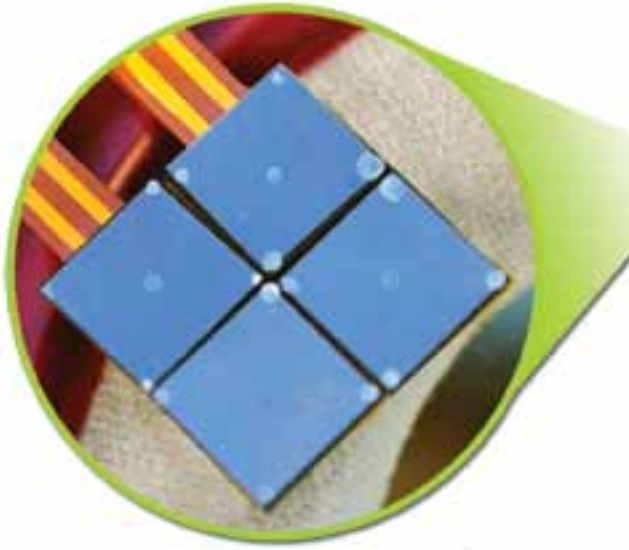

Tactilus® Free From sensors placed on a car door seal

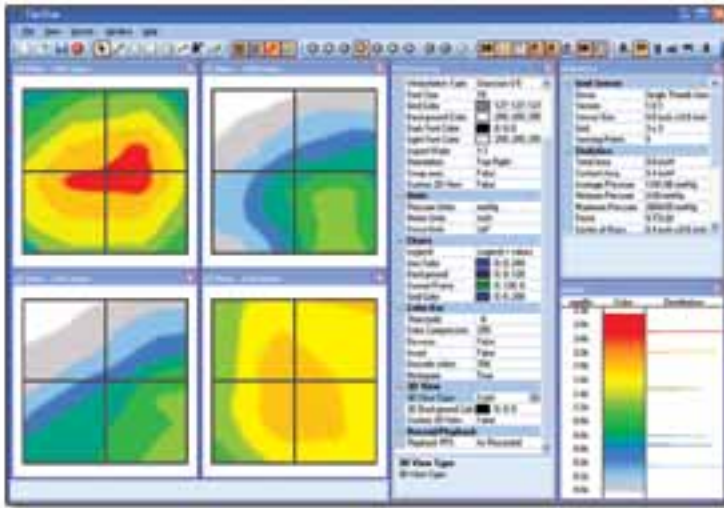

Screenshot of analytical software

"The free form philosophy is to empower the user to select the precise location where they require data collection rather than the constrained "matrix" inherent in traditional fixed tactile surface sensors. Free Form was created to maximize both data collection efficiency and value."

~ Jeffrey G. Stark, CEO

Unique to the industry, each Free Form sensor element is individually calibrated, sequentially serialized and quality tested to ensure the highest repeatability and accuracy. In addition, our sensor assemblies feature ergonomic and high quality Berg connectors, ensuring durable interconnection.

The Tactilus® Free Form door seal sensor system is designed to allow the user to collect pressure position and magnitude data at discrete selected locations across a door seal. Proper placement and construction of seals has a dramatic effect on wind noise, waterproofing, vibration and air quality. Tactilus® door seal sensors aid the engineer in identifying interface pressures across any seal surface both statically, while the vehicle is stationary, as well as while being driven. The Tactilus® Free Form sensor system is a "user constructed" tactile surface pressure system that provides unprecedented flexibility and ease of use.

Key features:

- 16 Channel simultaneous data collection
- Sensors are disposable and very economical

SENSOR SPECIFICATIONS	
Technology	Resistive
Pressure Range	0 - 30 PSI (0 - 2.1 kg/cm ²)
Sensing Points	16
Max Simultaneous channels	16
Total Sensing Area	Customizable to application
Scan Speed	Up to 30 hertz
Spatial Resolution	Customizable from 0.08 in (2 mm)
Thickness	30 mils (0.76 mm)
Accuracy	± 10%
Repeatability	± 2%
Hysteresis	± 5%
Non-linearity	± 1.5%

System includes: sensor element, electronic controller, software and cables