


Thermal Protection Barrier Film



TemprX® is a thermal protection polyimide film for use with Pressure Indicating Sensor Film in applications that reach high temperatures. Pressure Indicating Sensor Film is thin, flexible, and instantly captures and records pressure distribution and magnitude between any two contacting, mating or impacting surfaces. It is simple to use, effective and inexpensive.

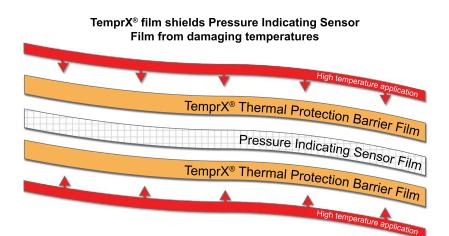

TemprX[®] film comes on a roll or by the sheet

COMMON APPLICATIONS



Aerospace: composite bonding, nip pressures



Electronics: heat sink analysis, nip pressures, laminations, LCD bonding



Factory: lamination, clamping, heat sealing, nip pressures

PHYSICAL SPECIFICATIONS

Roll Dimensions: 1 ft. x 108 ft. (0.3 m x 32 m)

Temperature Range: Up to 752° F (400° C)

Thickness: 5 mil (0.127 mm)

Other thicknesses and widths available. MSDS available upon request.