

TACTILE PRESSURE INDICATING SENSOR FILM


Application: Nip

Fujifilm Prescale® is a unique, affordable and easy to use tool that reveals the distribution and magnitude of pressure between any two mating rolls whether rubber, steel or composite.

4 EASY STEPS


1

Nip pressure measurement film comes on a roll

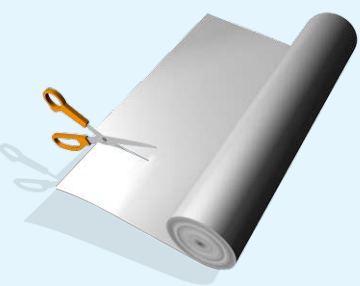


2

Place the nip impression film between any two rolls that come in contact

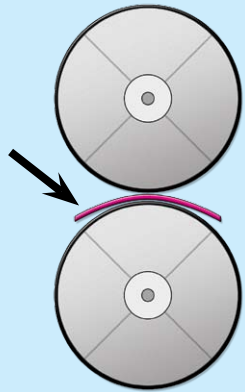


3

Fujifilm Prescale® nip impression film captures a permanent image of pressure distribution and magnitude

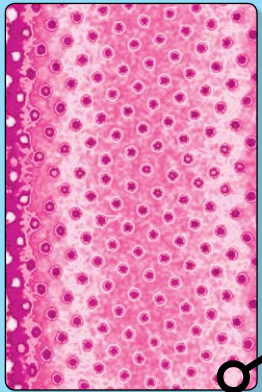


4

The color Fujifilm Prescale® nip impression film turns indicates the precise PSI level



Quickly developed*, Fujifilm Prescale® dramatically reveals a complete pressure "map"

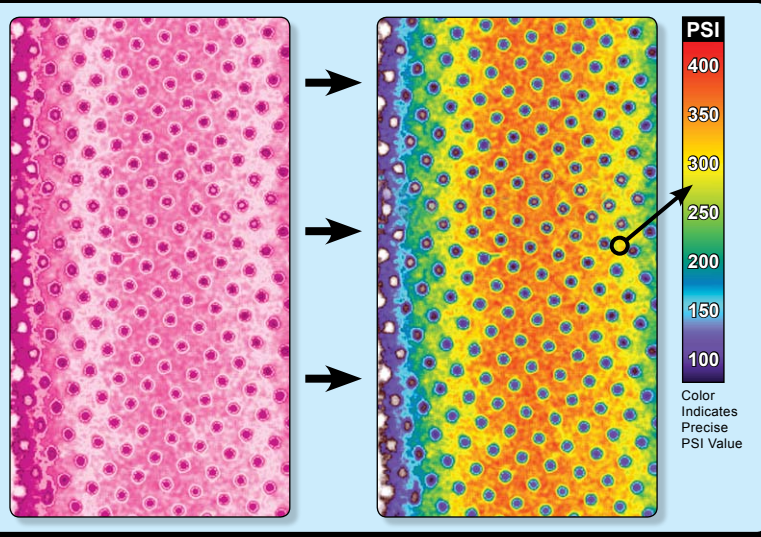

*Colorization applied with the Topaq® optical analysis system

Fujifilm Prescale® is a mylar based film that contains a layer of tiny microcapsules. The application of force upon the film causes the microcapsules to rupture, producing an instantaneous and permanent high resolution "topographical" image of pressure variation across the contact area.

Simply place Fujifilm Prescale® pressure indicating sensor film between any two surfaces that touch, mate or impact. Apply pressure, remove it and immediately the film reveals the pressure distribution profile that occurred between the two surfaces. Conceptually similar to Litmus paper, the color intensity of Fujifilm Prescale® is directly related to the amount of pressure applied to it. The greater the pressure, the more intense the color.


Fujifilm Prescale® is extremely thin (4 to 8 mils) which enables it to conform to curved surfaces. It is ideal for invasive intolerant environments and tight spaces not accessible to conventional electronic transducers.

Tactile Pressure Indicating Sensor Film

Accurate, Cost-effective, Easy to Employ Pressure Mapping Technology

Have you ever needed to evaluate pressure or force between two touching or mating surfaces? Previously, your only alternatives were strain gauges and load cells, that are both time consuming and difficult to interface. Now with the advent of our disposable one-time use pressure film, Fujifilm Prescale®, evaluating surface contact pressure distribution and magnitude is accurate, quick and highly economical.

CROSS SECTIONAL VIEW OF FUJIFILM PRESCALE® FILM

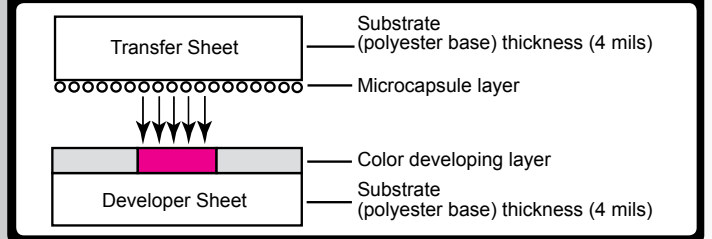

7 Sensitivities To Accommodate A Wide Range Of Pressures

FILM TYPE	PRESSURE RANGE	
EXTREME LOW	7.2 - 28 PSI	(0.5 - 2 kg/cm ²)
ULTRA LOW	28 - 85 PSI	(2 - 6 kg/cm ²)
SUPER LOW	70 - 350 PSI	(5 - 25 kg/cm ²)
LOW	350 - 1,400 PSI	(25 - 100 kg/cm ²)
MEDIUM	1,400 - 7,100 PSI	(100 - 500 kg/cm ²)
HIGH	7,100 - 18,500 PSI	(500 - 1,300 kg/cm ²)
SUPER HIGH	18,500 - 43,200 PSI	(1,300 - 3,000 kg/cm ²)

INDUSTRY APPLICATIONS

AEROSPACE	Composite Layups, Material Testing, Bolted Joints
AUTOMOTIVE	Gasketing, Impacts, Fuel Cell Stacking, Clutches, Brakes, Tire Tread
ELECTRONICS	Heat Sinks, LCD Bonding, PCB Lamination, Wafer Bonding/Polishing
MEDICAL	Clamping, Gait Analysis, Ergonomics, Orthotics and Prosthetics

PACKAGING	Heat Sealing, Converting
PLASTICS	Lamination Press, Die Extrusion Injection Molding, Stamping
PRINTING/ PAPERMAKING	Nip Impressions

PHYSICAL SPECIFICATIONS

OPERATING TEMPERATURE	41°F to 95°F (5°C - 35°C) (much higher for brief exposure)	SUBSTRATE	Polyethylene Terephthalate (PET)
HUMIDITY RANGE	20% to 90% RH	ACCURACY	±10% visual, ±2% utilizing optional optical measurement systems
GAUGE	4, 8, or 20 mils	SHELF LIFE	2 years
SPATIAL RESOLUTION	5 to 15 microns		

MSDS Available Upon Request.



Sensor Products Inc.
300 Madison Avenue
Madison, NJ 07940 USA
Phone: 1.973.884.1755
Fax: 1.973.884.1699
www.sensorprod.com

www.sensorprod.com

Sensor Products, Inc. is an authorized distributor for Fujifilm Prescale® in the U.S.A., Canada, Mexico & the Caribbean only. Fujifilm Prescale® is a registered trademark of Fujifilm Corp. ©2011 Sensor Products, Inc. Updated 04-11-2011